



Terrain Above Ground

PVC-u above ground drainage systems

**TECHNICAL MANUAL
ABOVE GROUND
DRAINAGE SYSTEMS**

Now available
up to 250mm Diameter

Technical drawing details visible in the background include:
 - Dimensions: 217, 199, 228, 105, 169, 26.
 - Main Roof Effective roof area $A(m^2) = (L \times B) = (40 \times 25) = 1000 m^2$
 - Flow rate $Q (l/s) = A \times R_i (mm/hr) = 1000 \times 75 = 3600$
 - $Q = 3600 / 100 = 36$
 - $20.83 l/s$
 - Diagrams showing pipe layouts and components like 'angle access branch triple socket'.

Terrain Above Ground Drainage Systems

Having pioneered the development of solvent-weld systems, Terrain soil & waste products represent the industry benchmark for quality, installation, flexibility and product innovation backed by the highest levels of customer service. Terrain systems include an extensive range of soil & waste drainage products for commercial, industrial, housing and public sector developments, all built on the strength of our Terrain brand. Systems include solvent-weld and push-fit options for both soil & waste drainage; overflow, WC pan and trap connectors along with a comprehensive range of adaptors and accessories. Products are available in a range of colours.

- Industry leading range of solvent and push-fit soil and waste solutions
- Unique products offer unrivalled installation options
- High quality finish, colour to match all systems
- Suitable for all types of commercial and domestic installations
- Extensive technical experience to support and advise on all aspects of design and installation
- Fully accredited product systems

As you would expect from a market leader our products come with all relevant standards including:

Manufacturing Standards



BS 5255:1989 Specification for Thermoplastics Waste Pipe and Fittings

BS 4514:2001 PVC Soil and Ventilation Pipes, Fittings and Accessories

BS EN 1329:2000 Plastic Piping Systems for Soil and Waste Discharge

BS EN 1566:2000 Plastic Piping Systems for Soil and Waste Discharge (Chlorinated)

BS EN 12380 A1 Air Admittance Valve

BS EN 12380 A1 Air Admittance Valve (Pleura System)

BS EN 1366-3 Terrain Firetrap Sleeves and Collars

Quality Management Systems Standards

EN ISO 9001:2008 Management System

EN ISO14001:2004 Management System

BS OHSAS 18001:2007 Management System

PASS 99:2006 Integrated Management Registration



Contents

Terrain Above Ground Drainage

| | |
|-------------------------------------|---------|
| 100 PVC-u Solvent-Weld | 04 - 15 |
| Rainwater Systems | 16 - 18 |
| 100 Large Diameter | 19 - 21 |
| 100P PVC-u Push-Fit | 22 - 27 |
| 200 MuPVC Solvent Weld | 28 - 33 |
| 300 Polypropylene Push-Fit | 34 - 37 |
| 400 Traps & Pan Connectors System | 38 - 45 |
| 500 Waste System Overflow | 46 - 48 |
| Accessories/Ancillaries | 49 - 50 |
| Terrain Pleura | 51 |
| Terrain Firetrap | 52 |
| General Principles | 53 |
| Sitework Instructions | 54 - 63 |
| System Connections | 64 - 70 |
| Rainwater Outlets | 71 - 75 |
| Design Considerations & Principles | 76 - 77 |
| UK Design Principles | 78 - 79 |
| Middle East Design Principles | 80 - 81 |
| Design Data - Soil & Waste Drainage | 82 - 83 |
| Design Data - Rainwater | 84 - 85 |
| Fabrication Service | 86 |
| Index | 87 - 89 |
| Notes | 90 |


Sustainable Materials

Plastics are among the most researched materials in the world and rapid technological and manufacturing developments made in recent years have allowed for continuous innovation.

Polypipe Terrain pioneered the development of PVC material for the manufacture of drainage pipes and fittings; we remain at the forefront of the industry across the globe with the use of ever-more environmentally friendly materials with no loss of mechanical characteristics.

Utilising a sustainable material composition contributes significantly to an environmentally friendly manufacturing process and gives a finished product that can be recycled in accordance with British Standards.

For further information, please refer to www.polypipe.com

Products marked  in the product listings are available in CAD form for ready incorporation into design drawings. If you would like a disk or CD ROM in the appropriate format, simply contact the Technical Advisory Service.

Terrain Soil System

100 Soil System - PVC-u (solvent-weld)

82, 110 and 160mm PVC-u soil pipes and fittings:

- Wide range of bends, branches and access fittings to meet all application requirements

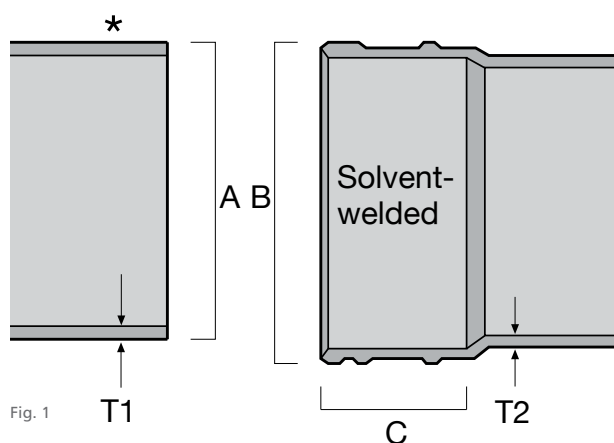


Fig. 1

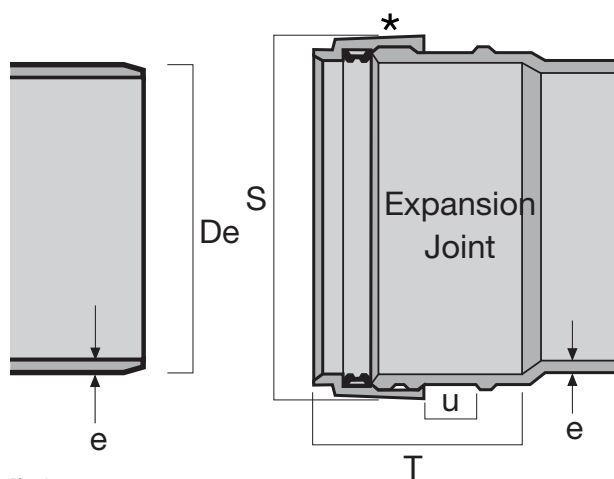


Fig. 1a

82, 110 and 160mm pipe and fittings (Fig.1)

| A | B | C | T1 | T2 |
|-----|-----|----|-----|-----|
| 82 | 95 | 51 | 3.2 | 3.2 |
| 110 | 122 | 51 | 3.2 | 3.2 |
| 160 | 175 | 76 | 3.3 | 3.5 |

The pipe and socket illustrated here are for solvent weld jointing. The conversion to seal ring expansion joint is made by adding a 109 seal ring adaptor to the socket.

* Some Terrain fittings feature a groove here, as shown on the underside.

82, 110 and 160mm pipe and fittings (Fig.1a)

| De | S | e (min pipe) | e (min body of fitting) | U | T |
|-----|-----|--------------|-------------------------|----|-----|
| 82 | 102 | 3.2 | 3.2 | 18 | 72 |
| 110 | 127 | 3.2 | 3.2 | 19 | 72 |
| 160 | 184 | 3.3 | 3.5 | 25 | 101 |

The 109 seal ring adaptor has been drawn in position on the socket of the 100 system fitting to illustrate its application and dimension S. The dimension U is to accommodate all Terrain holderbats.

* Some Terrain fittings feature a groove here, as shown on the underside.

100 Solvent-Weld

Terrain Soil System - 100 Solvent-Weld

| | Size (mm) | L | T (min) | Colour | Code |
|--------------------------------|-----------|----|---------|--------|----------|
| SOIL PIPE - PLAIN ENDED | | | | | |
| ♥ | 82 | 3m | 3.2 | GBW | 100.3.30 |
| ♥ | 82 | 4m | 3.2 | GBW | 100.3.40 |
| ♥ | 110 | 3m | 3.2 | GBWR | 100.4.30 |
| ♥ | 110 | 4m | 3.2 | GBWR | 100.4.40 |
| ♥ | 160 | 3m | 3.3 | G | 100.6.30 |
| ♥ | 160 | 3m | 3.3 | G | 100.6.40 |





| | Size (mm) | A | Colour | Code |
|--|-----------|----|--------|-------|
| RING SEAL ADAPTOR - converts any Terrain solvent socket to a ring seal expansion socket | | | | |
| | 82 | 21 | GB | 109.3 |
| | 110 | 21 | GBWR | 109.4 |
| | 160 | 26 | G | 109.6 |

| | Size (mm) | L | Z | Colour | Code |
|---|-----------|-----|---|--------|-------|
| STRAIGHT COUPLER DOUBLE SOCKET - double solvent socket | | | | | |
| ♥ | 82 | 92 | 3 | GBW | 110.3 |
| ♥ | 110 | 102 | 3 | GBWR | 110.4 |
| ♥ | 160 | 160 | 8 | G | 110.6 |

| | Size (mm) | L | Z | Colour | Code |
|---|-----------|-----|---|--------|-------|
| EXPANSION COUPLER - to allow expansion in longer pipe runs | | | | | |
| ♥ | 82 | 113 | 3 | GBW | 111.3 |
| ♥ | 110 | 123 | 3 | GBW | 111.4 |
| ♥ | 160 | 210 | 8 | G | 111.6 |

| | Size (mm) | L | Colour | Code |
|-----------------------------------|-----------|-----|--------|---------|
| SLIP COUPLER DOUBLE SOCKET | | | | |
| ♥ | 82 | 134 | G | 111.S.3 |
| ♥ | 110 | 144 | GB | 111.S.4 |
| ♥ | 160 | 210 | G | 111.S.6 |

| | Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|---------------------------------|-----------|--------|-----|-----|--------|-----------|
| SWEPT BEND DOUBLE SOCKET | | | | | | |
| ♥ | 82 | 92½ | 102 | 98 | GBW | 101.3.92 |
| ♥ | 110 | 92½ | 75 | 83 | GBWR | 101.4.92 |
| ♥ | 160 | 92½ | 178 | 184 | G | 101.6.92 |
| ♥ | 110 | 104 | 80 | 76 | G | 101.4.104 |
| ♥ | 110 | 112½ | 65 | 63 | GB | 101.4.112 |
| ♥ | 82 | 135 | 25 | 25 | GBW | 101.3.135 |
| ♥ | 110 | 135 | 21 | 30 | GBWR | 101.4.135 |
| ♥ | 160 | 135 | 44 | 44 | G | 101.6.135 |









(82mm) 92½° and 135° as standard.
(110mm) 92½°, 104°, 112½° and 135° as standard.

G - Grey B - Black W - White R - Rustic Brown

Terrain Soil System

Terrain Soil System - 100 Solvent-Weld



| | Size (mm) | Angle° | Z1 | Z2 (max) | Z2 (min) | Colour | Code |
|--|-----------|--------|----|----------|----------|--------|----------|
| SPIGOT SOCKET BENDS - long tail | | | | | | | |
| ♥ | 82 | 92½ | 41 | 152 | 97 | G | 107.3.92 |
| ♥ | 110 | 92½ | 57 | 197 | 110 | GBW | 107.4.92 |

| | Size (mm) | Angle° | Z1 | Z2 (max) | Z2 (min) | Colour | Code |
|----------------------------|-----------|--------|----|----------|----------|--------|------------|
| SPIGOT SOCKET BENDS | | | | | | | |
| ♥ | 110 | 135 | 42 | 85 | | GBW | 107.4.135 |
| ♥ | 160 | 135 | 60 | 130 | | G | 107P.6.135 |

| | Size (mm) | Z1 | Z2 | Colour | Code |
|---|-----------|--------|----|--------|-----------|
| VARIABLE BEND SPIGOT/SOCKET - adjustable 0 - 25° | | | | | |
| ♥ | 110 | 0 - 25 | 45 | G | 107.4.025 |
| Double spigot | | | | | |
| ♥ | 110 | 0 - 25 | 45 | G | 101.4.025 |


| | Size (mm) | Angle° | Z1 | Z2 | Z3 | A | Colour | Code |
|--|-----------|--------|-----|-----|-----|----|--------|-----------|
| SINGLE EQUAL BRANCH TRIPLE SOCKET - connect to boss horns using 117 boss adaptors (see page 21) | | | | | | | | |
| ♥ | 82 | 92½ | 70 | 83 | 35 | | GBW | 104.3.92 |
| ♥ | 82 | 135 | 19 | 108 | 102 | | GB | 104.3.135 |
| ♥ | 110 | 92½ | 82 | 82 | 54 | | GBWR | 104.4.92 |
| ♥ | 110 | 92½ | 101 | 96 | 50 | 74 | GBW | 104.4.924 |
| ♥ | 160 | 92½ | 184 | 178 | 160 | | G | 104.6.92 |
| With boss connections | | | | | | | | |
| 2 boss horns | | | | | | | | 104.3.92 |
| 3 boss horns | | | | | | | | 104.4.92 |
| 4 boss horns | | | | | | | | 104.4.924 |
| 6 boss horns | | | | | | | | 104.6.92 |

| | Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|--|-----------|--------|----|-----|------|--------|-----------|
| SINGLE EQUAL BRANCH - no waste boss connections | | | | | | | |
| | 110 | 104 | 77 | 74 | 72 | G | 104.4.104 |
| ♥ | 110 | 135 | 25 | 137 | 137 | GBW | 104.4.135 |
| ♥ | 160 | 135 | 53 | 198 | 198* | G | 104.6.135 |


100 Solvent-Weld

Terrain Soil System - 100 Solvent-Weld


| Size (mm) | Angle° | A | Z1 | Z2 | Z3 | Colour | Code |
|---|--------|----|-----|----|----|--------|------------|
| SINGLE BRANCH SPIGOT OUTLET - with boss connections - 4 boss horns | | | | | | | |
| 110 | 92½ | 74 | 103 | 96 | 50 | GB | 104.104.92 |




| Size (mm) | Angle° | A | B | Z1 | Z2 | Z3 | Colour | Code |
|---|--------|-----|-----|----|----|----|--------|------------|
| SINGLE EQUAL BRANCH VARIABLE BOSS - Spigot outlet, 2 boss horns, 2 waste sockets | | | | | | | | |
| 110 | 92½ | 142 | 140 | 91 | 83 | 59 | G | 104.412.92 |




| Size (mm) | Angle° | A | B | Z1 | Z2 | Z3 | Colour | Code |
|--|--------|-----|-----|----|----|----|--------|------------|
| SINGLE EQUAL BRANCH VARIABLE BOSS - Socket outlet | | | | | | | | |
| 110 | 92½ | 142 | 140 | 91 | 83 | 59 | G | 104.422.92 |




| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|---|--------|----|----|----|--------|-----------|
| SINGLE UNEQUAL BRANCH TRIPLE SOCKET - 2 boss horns | | | | | | |
| 160/110 | 92½ | 59 | 87 | 62 | G | 104.64.92 |



| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|--|--------|----|-----|-----|--------|------------|
| SINGLE UNEQUAL BRANCH TRIPLE SOCKET - No waste boss connections | | | | | | |
| 160/110 | 135 | 70 | 173 | 164 | G | 104.64.135 |




| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|--|--------|-----|-----|-----|--------|------------|
| CORNER BRANCH TRIPLE SOCKET - 1 boss horn | | | | | | |
| 110 | 92½ | 94 | 83 | 59 | G | 106.490.92 |
| 160 | 92½ | 196 | 172 | 135 | G | 106.690.92 |




Terrain Soil System

Terrain Soil System - 100 Solvent-Weld




| Size (mm) | Angle° | A | Z1 | Z2 | Colour | Code |
|--|--------|-----|----|----|--------|------------|
| CORNER BOSS BRANCH - spigot outlet - 1 boss horn, 2 waste sockets | | | | | | |
| 110 | 92½ | 120 | 83 | 59 | G | 106.490.12 |




| Size (mm) | Angle° | A | Z1 | Z2 | Colour | Code |
|---|--------|-----|----|----|--------|------------|
| CORNER BOSS BRANCH - socket outlet | | | | | | |
| 110 | 92½ | 120 | 83 | 59 | G | 106.490.22 |

| Size (mm) | Angle° | A | B | Z1 | Z2 | Z3 | Colour | Code |
|--|--------|----|-----|-----|----|----|--------|------------|
| DOUBLE BRANCH - spigot outlet, 4 boss horns | | | | | | | | |
| 110 | 92½ | 75 | 128 | 203 | 96 | 50 | G | 106.104.92 |


| Size (mm) | Angle° | A | B | Z1 | Z2 | Z3 | Colour | Code |
|--|--------|----|---|-----|----|----|--------|----------|
| DOUBLE BRANCH - socket outlet, 4 boss horns | | | | | | | | |
| 110 | 92½ | 74 | - | 138 | 95 | 50 | G | 106.4.92 |




| Size (mm) | Angle° | A | B | Z1 | Z2 | Z3 | Colour | Code |
|----------------------------------|--------|---|---|-----|-----|-----|--------|-----------|
| DOUBLE BRANCH - no bosses | | | | | | | | |
| 110 | 135 | - | - | 25 | 137 | 137 | G | 106.4.134 |
| 160 | 135 | - | - | 196 | 172 | 135 | G | 106.6.135 |



| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|---|--------|----|----|----|--------|-----------|
| DOUBLE UNEQUAL BRANCH - 2 boss horns | | | | | | |
| 160/110 | 92½ | 59 | 87 | 62 | G | 106.64.92 |



| Size (mm) | L | Z | Colour | Code |
|----------------------------------|-----|-----|--------|-------|
| ACCESS PIPE DOUBLE SOCKET | | | | |
| 110 | 216 | 115 | GBWR | 138.4 |
| 160 | 396 | 230 | G8WR | 138.6 |




| Size (mm) | L | Z | Colour | Code |
|----------------------------------|-----|-----|--------|-------|
| ACCESS PIPE SINGLE SOCKET | | | | |
| 110 | 216 | 166 | GB | 139.4 |


100 Solvent-Weld

Terrain Soil System - 100 Solvent-Weld


| | Size (mm) | A | B | Z | Colour | Code |
|---|-----------|----|----|-----|--------|-------|
| ACCESS PIPE CONNECTOR - 2 boss horns | | | | | | |
| ♥ | 82 | 41 | 39 | 120 | GBW | 137.3 |
| ♥ | 110 | 41 | 35 | 149 | GBW | 137.4 |




| | Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|----------------------------------|-----------|--------|-----|----|--------|----------|
| ACCESS BEND DOUBLE SOCKET | | | | | | |
| ♥ | 110 | 92½ | 102 | 98 | GBW | 103.4.92 |




| | Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|--|-----------|--------|----|----|----|--------|----------|
| SINGLE ACCESS BRANCH TRIPLE SOCKET - 4 boss horns | | | | | | | |
| ♥ | 110 | 92½ | 99 | 96 | 50 | GBW | 105.4.92 |




| | Size (mm) | L | Hole Saw Ø | Colour | Code |
|--------------------|-----------|-----|------------|--------|-------|
| ACCESS DOOR | | | | | |
| ♥ | 82 | 114 | 48 | G | 135.3 |
| ♥ | 110 | 152 | 73 | GB | 135.4 |
| ♥ | 160 | 152 | 73 | G | 135.6 |



| | Size (mm) | A | Z1 | Z2 | Colour | Code |
|-------------------|-----------|-----|----|----|--------|-------|
| ACCESS CAP | | | | | | |
| | 82 | 83 | 16 | 32 | GW | 136.3 |
| | 110 | 97 | 21 | 46 | GBWR | 136.4 |
| | 160 | 122 | 22 | 42 | G | 136.6 |





| | A | Colour | Code |
|-------------------------------------|-----|--------|----------|
| ACCESS DOOR WITH TEST NIPPLE | | | |
| | 127 | GBWR | 6592/DVW |




Terrain Soil System


Terrain Soil System - 100 Solvent-Weld




| Size (mm) | A | Z | Hole Saw Ø | Colour | Code |
|---|-----|----|------------|--------|-----------|
| TWO PART WASTE BOSS SOLVENT SOCKET | | | | | |
| 110/32 | 79 | 53 | 48 | G | 112.4.125 |
| 82/40 | 69 | 39 | 57 | G | 112.3.15 |
| 110/40 | 82 | 53 | 57 | G | 112.4.15 |
| 110/50 | 86 | 53 | 70 | GW | 112.4.2 |
| 160/50 | 110 | 77 | 70 | G | 112.6.2 |




| Size (mm) | L | Colour | Code |
|--------------------|----|--------|-------|
| SOCKET PLUG | | | |
| 110 | 69 | GBW | 130.4 |
| 160 | 92 | G | 130.6 |



| Size (mm) | A | Z | Hole Saw Ø | Colour | Code |
|---|-----|----|------------|--------|-----------|
| SELF LOCKING BOSS SEAL RING SOCKET | | | | | |
| 110/32 | 111 | 60 | 60 | GW | 122.4.125 |
| 110/40 | 111 | 60 | 64 | GB | 122.4.15 |
| 110/50 | 119 | 60 | 75 | GBW | 122.4.2 |



| Size (mm) | Z1 | Z2 | Z3 | Colour | Code |
|--|----|----|----|--------|-----------|
| SINGLE BOSSSED PIPE CONNECTOR DOUBLE SOCKET | | | | | |
| 110/32 | 30 | 56 | 31 | GBWR | 120.4.125 |
| 110/40 | 30 | 56 | 31 | GBWR | 120.4.15 |
| 110/50 | 30 | 59 | 31 | GBW | 123.4 |



| Size (mm) | Z1 | Z2 | Z3 | Colour | Code |
|---|----|----|----|--------|------------|
| SINGLE BOSSSED PIPE CONNECTOR SPIGOT - for 40mm waste pipe | | | | | |
| 110/40 | 28 | 56 | 27 | GR | 120.412.15 |

100 Solvent-Weld

Terrain Soil System - 100 Solvent-Weld

| Size (mm) | Z1 | Z2 | Z3 | Colour | Code |
|--|----|----|----|--------|---------|
| DOUBLE BOSSED PIPE CONNECTOR DOUBLE SOCKET - for 50mm waste pipes (40mm with adaptor) | | | | | |
| 82/50 | 50 | 38 | 65 | GB | 120.3.2 |

2 x 50mm waste sockets, 2 blanking plugs.

| Size (mm) | Z1 | Z2 | Z3 | Colour | Code |
|---|----|----|----|--------|----------|
| TRIPLE BOSSED PIPE CONNECTOR DOUBLE SOCKET | | | | | |
| 110/40 | 30 | 56 | 30 | GB | 121.4.15 |

| Size (mm) | Z1 | Z2 | Z3 | Z4 | Z5 | Colour | Code |
|---|----|----|----|----|----|--------|---------|
| FOUR-WAY BOSS PIPE DOUBLE SOLVENT SOCKET | | | | | | | |
| 110 | 44 | 40 | 56 | 55 | 59 | G | 120.4.2 |

2 boss horns, 2 waste sockets.










| Size (mm) | Z1 | Z2 | Z3 | Z4 | Z5 | Colour | Code |
|--|----|----|----|----|----|--------|-----------|
| FOUR-WAY BOSS PIPE DOUBLE SOLVENT SOCKET/SPIGOT | | | | | | | |
| 110 | 44 | 40 | 56 | 55 | 59 | G | 120.412.2 |

2 boss horns, 2 waste sockets.

| Size (mm) | L1 | L2 | L3 | L4 | Z1 | Colour | Code |
|--|-----|-----|-----|-----|-----|--------|------------|
| UNIVERSAL SOIL MANIFOLD - for solvent waste connections | | | | | | | |
| 110 | 228 | 189 | 199 | 217 | 105 | G | 119.412.15 |


For connection of BS 5254/BS 5255 40mm waste pipes at floor level. Incorporates 4 inlets to accept 40mm waste pipes without need for adaptors. Use with Swivel Elbow or Swept Bend.
For pushfit waste connections see page 21.

| Size (mm) | A | Z | Colour | Code |
|---|----|----|--------|---------|
| SOCKET REDUCER - for solvent connections | | | | |
| 82/50 | 11 | 3 | GW | 124.3.2 |
| 110/50 | 24 | 3 | GBW | 124.4.2 |
| 110/82 | 11 | 3 | GBW | 124.4.3 |
| 160/110 | 22 | 25 | GW | 124.6.4 |

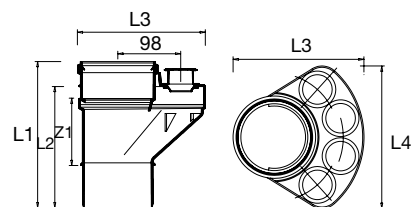

Terrain Soil System


Terrain Soil System - 100 Solvent-Weld

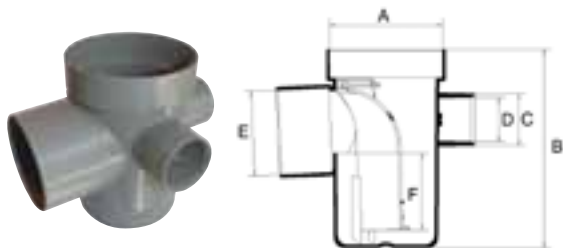


| Size (mm) | A | B | C | D | E | F | Colour | Code |
|--|-----|-----|----|----|-----|----|--------|-----------------|
| TRAPPED FLOOR GULLY - under-floor trap (e.g. for shower areas) with 3 sockets to accept 40mm or 50mm waste pipe e.g. for shower and wash down areas | | | | | | | | |
| 110/82 | 110 | 169 | 51 | 43 | 82 | 50 | GT | 281.43 |
| 160/110 | 160 | 169 | 51 | 43 | 110 | 50 | GT | 281.64 |
| 110/82 | 110 | 194 | 64 | 56 | 82 | 75 | GT | 279.432* |

*2" Inlets only. Refer to page 31 for socket reducers if required


Seal depth: 50-75mm. Cleaning access via removable baffle with integral gasket to maintain airtight seal.



| Size (mm) | A | B | Z1 | Z2 | Colour | Code |
|---|----------|-----|----|----|--------|--------------|
| FLOOR GULLY INLETS - two part fitting to be set in standard-tiled floor (e.g. in shower areas). Comprises of raising piece with 50mm top and snap-in cover | | | | | | |
| 110 PVC | 50 x 150 | 110 | 14 | 48 | GW | 282.6 |
| 110 SS | 50 x 150 | 110 | 14 | 48 | Self | 283.6 |



| Size (mm) | Colour | Code |
|-----------------------------------|--------|--------------|
| SEALED GULLY RAISING PIECE | | |
| 110 | GW | 284.6 |



| Size (mm) | Colour | Code |
|-----------------------------------|--------|--------------|
| SEALED GULLY RAISING PIECE | | |
| 110 | Self | 285.6 |

100 Solvent-Weld

Terrain Soil System - 100 Solvent-Weld

| Size (mm) | A | B | C | Colour | Code |
|---------------------------------|-----|-----|-----|--------|-------|
| THERMAL MOVEMENT LIMITER | | | | | |
| 82 | 100 | 129 | 154 | Self | 190.3 |
| 110 | 100 | 158 | 178 | Self | 190.4 |
| 160 | 100 | 232 | 260 | Self | 190.6 |

| Size (mm) | A | B | C | Colour | Code |
|--|-----|-----|-----|--------|-------|
| INTERMEDIATE SUPPORT BRACKET - to support horizontal pipework | | | | | |
| 82 | 100 | 129 | 154 | Self | 191.3 |
| 110 | 100 | 158 | 178 | Self | 191.4 |
| 160 | 100 | 232 | 260 | Self | 191.6 |










| Size (mm) | A | B | C | D | Colour | Code |
|--|-----|-----|-----|-----|--------|-------|
| TWO-PIECE PIPE BRACKET - galvanised steel | | | | | | |
| 82 | 140 | 114 | 76 | 124 | Self | 140.3 |
| 110 | 175 | 147 | 89 | 152 | Self | 140.4 |
| 160 | 216 | 196 | 114 | 197 | Self | 140.6 |

| Size (mm) | A | B | C | D | Colour | Code |
|-------------------------------|-----|-----|----|-----|--------|-------|
| ONE-PIECE PIPE BRACKET | | | | | | |
| 82 | 132 | 110 | 76 | 117 | GBW | 143.3 |
| 110 | 164 | 141 | 90 | 155 | GBWR | 143.4 |

| Size (mm) | A | B | C (max) | C (min) | Colour | Code |
|---|----|----|---------|---------|--------|-------|
| ADJUSTABLE PIPE BRACKET PLASTIC-COATED | | | | | | |
| 110 | 99 | 64 | 108 | 80 | B | 144.4 |



Both have self coloured backplates.

| Size (mm) | A | B | C | Colour | Code |
|---|-----|-----|----|--------|-------|
| PIPE BRACKET GALVANISED DRIVE-IN | | | | | |
| 110 | 178 | 152 | 59 | Self | 142.4 |





Terrain Soil System

Terrain Soil System - 100 Solvent-Weld





| Size (mm) | A | B | Colour | Code |
|---|-----|----|--------|-------|
| WEATHERING APRON - for lead slates | | | | |
| 82 | 102 | 38 | GB | 131.3 |
| 110 | 128 | 48 | GBWR | 131.4 |
| 160 | 179 | 51 | G | 131.6 |




| Size (mm) | C | D | Colour | Code |
|---|-----|----|--------|-----------|
| WEATHERING APRON - for asphalt upstand | | | | |
| 82 | 204 | 59 | G | 131.3.200 |
| 110 | 203 | 46 | G | 131.4.200 |

Makes weathertight cover between soil pipe and lead slate at roof level.




| Size (mm) | Plate Size | Colour | Code |
|---|------------|--------|-----------|
| WEATHERING SLATES - for flat roof | | | |
| 82 to 110 | 406 x 406 | Alu/B | 149.16.00 |
| WEATHERING SLATES - for sloping roof (min 30°) | | | |
| 82 to 110 | 406 x 406 | Alu/B | 149.18.22 |
| WEATHERING SLATES - for sloping roof (min 17°) | | | |
| 82 to 110 | 406 x 406 | Alu/B | 149.24.22 |


Makes weathertight cover between soil pipe and lead slate at roof level.
Available for flat or pitched roof. Colours: Base - Aluminium, Cone - Black.



| Size (mm) | A | Colour | Code |
|------------------|-----|--------|-------|
| VENT COWL | | | |
| 82 | 51 | GB | 150.3 |
| 110 | 64 | GBWR | 150.4 |
| 160 | 83 | G | 150.6 |
| 225 | 120 | G | 152.6 |



| Size (mm) | A | L | Colour | Code |
|--|-----|-----|--------|-------|
| DUCT COWL - Stops rainwater from entering ventilation ducts | | | | |
| 110 | 205 | 80 | GBR | 152.4 |
| 160 | 225 | 120 | G | 152.6 |



| Size (mm) | A | B | L | Colour | Code |
|---|-----|----|-----|--------|----------|
| AUTOMATIC AIR ADMITTANCE VALVE | | | | | |
| 82/110 | 140 | 70 | 120 | W | 153.3.4 |
| AUTOMATIC AIR ADMITTANCE VALVE - polystyrene cover | | | | | |
| Self | | | | | 153.3.41 |

NOTE: Not to be used with Terrain Pleura alternative ventilation system.

100 Solvent-Weld

Terrain Soil System - 100 Solvent-Weld

| Use on Stack Size (mm) | A† | Z† | Hole Saw Ø | Colour | Code |
|--|-----|----|------------|--------|---------|
| STRAIGHT BOSS ADAPTOR RING SEAL SOCKET - for waste pipe | | | | | |
| 82 - 160 | 107 | 61 | 51 | GBW | 117.125 |
| 82 - 160 | 107 | 61 | 51 | GBWR | 117.15 |
| 82 - 160 | 107 | 61 | 51 | GBW | 117.2 |

| Use on Stack Size (mm) | A | Z1 | Z2 | Hole Saw Ø | Colour | Code |
|---|-----|----|----|------------|--------|-----------|
| BOSS ADAPTOR BEND SOLVENT SOCKET | | | | | | |
| 82 - 160 | 106 | 82 | 22 | 51 | GBW | 117.15.90 |
| 82 - 160 | 120 | 89 | 30 | 51 | GBW | 117.2.90 |
| 82 - 160 | - | 80 | 11 | 51 | GBW | 117.2.150 |

| Size (mm) | L | Colour | Code |
|--|----|--------|------|
| ADAPTOR TO UNDERGROUND DRAIN - push fit into bore of underground pipe | | | |
| 82/110 | 54 | B | 4DW3 |

NOTE: As a Terrain Underground product different discount structure applies.

| Size (mm) | A | B | Z1 | Colour | Code |
|---------------------------|----|-----|-----|--------|----------|
| POST FORMED SOCKET | | | | | |
| 82 | 60 | 98 | 240 | G | 126.3.12 |
| 110 | 64 | 127 | 236 | G | 126.4.12 |






NOTE: To be used with 9120 and 9119B.

| Size (mm) | Z1 | Colour | Code |
|---|----|--------|--------|
| ADAPTOR SADDLES - for 40mm waste pipes (40mm with adaptor) | | | |
| 110/40 | 29 | GR | 115P.4 |

Used with 117 Waste Adaptors to enable direct connection of 32mm and 40mm waste pipe to soil pipe.

| Size (mm) | A | B | C | Z | Colour | Code |
|----------------------------|-----|-----|----|----|--------|-------|
| PVC-U CAULKING BUSH | | | | | | |
| 110 | 133 | 124 | 63 | 67 | G | 132.4 |

To connect soil pipe to sockets of other material. Solid caulked into sockets.



Terrain Soil System

Terrain Rainwater System





A comprehensive range of rainwater outlets designed to work in conjunction with the Terrain Soil & Waste pipes and fittings.


Note: Please refer to the Terrain Rainwater brochure for full details of guttering and downpipe ranges.


Terrain Rainwater Systems


Terrain Roof Outlets


| Size (mm) | A | B | C | D | E | F | Code |
|--|----|----|-----|-----|---|----|---|
| FLAT ROOF OUTLET (LARGE) grey only -To drain surface water from flat roofs Suitable for most roof finishes | | | | | | | |
| 82 | 67 | 25 | 496 | 89 | 6 | 43 |  2170.3 |
| 110 | 58 | 25 | 406 | 117 | 6 | 43 | 2170.4 |





| Size (mm) | A | B | C | D | E | F | G | Code |
|---|----|----|-----|-----|---|----|----|---|
| DOMED ROOF OUTLET (LARGE) grey only -To drain surface water from flat roofs Suitable for most roof finishes | | | | | | | | |
| 82 | 67 | 25 | 406 | 89 | 6 | 43 | 76 |  2171.3 |
| 110 | 58 | 25 | 406 | 117 | 6 | 43 | 76 | 2171.4 |




| Size (mm) | A | B | C | D | E | F | Code |
|---|---|----|----|-----|----|---|---|
| FLAT ROOF OUTLET (SMALL DIAMETER) Grey only -To drain surface water from porches, garages and small balconies. Suitable for mineral felt or single layer plastic roofs | | | | | | | |
| 50 | 6 | 16 | 25 | 178 | 61 | 3 |  2180.2 |
| 82 | 6 | 16 | 25 | 178 | 87 | 3 | 2180.3 |




| Size (mm) | A | B | C | D | E | F | Code |
|--|----|----|----|-----|----|---|---|
| DOMED ROOF OUTLET (SMALL DIAMETER) Grey only -To drain surface water from porches, garages and small balconies. Suitable for mineral felt or single layer plastic roofs | | | | | | | |
| 50 | 48 | 16 | 25 | 178 | 61 | 3 |  2181.2 |
| 82 | 48 | 16 | 25 | 178 | 87 | 3 | 2181.3 |



| Size (mm) | A | B | C | D | E | F | G | Code |
|--|----|----|-----|-----|---|----|-----|----------------|
| INVERTED ROOF OUTLET grey only -To allow for drainage from two levels as required with inverted roof construction | | | | | | | | |
| 110 | 60 | 25 | 406 | 117 | 6 | 43 | 260 | 2171.4A |




| Size (mm) | A | B | C | D | E | F | G | Code |
|--|----|----|-----|-----|---|----|-----|----------------|
| INVERTED ROOF OUTLET grey only -Special vented type for combined systems Suitable for most roof finishes | | | | | | | | |
| 110 | 58 | 25 | 406 | 117 | 6 | 43 | 371 | 2174.44 |



Terrain Soil System


Balcony Outlets



| Size (mm) | A | B | C | D | E* | F | G | Code |
|-----------|---|---|---|---|----|---|---|------|
|-----------|---|---|---|---|----|---|---|------|

BALCONY OUTLET grey only -For screed-finished balconies
Connects to 82mm round downpipe can be reduced via socket Adaptors
– 2173.3.25 for 68mm round pipe
– 2273.3.23 for 62mm round pipe
When used singly or at top of multi-storey building, use 9995.3 Blanking Cap
*Min size hole for roof slab



| | | | | | | | | |
|----|----|----|----|-----|----|----|----|---|
| 82 | 48 | 27 | 59 | 170 | 94 | 13 | 68 |  2172.3 |
|----|----|----|----|-----|----|----|----|---|



| Size (mm) | A | B | C | D | E* | F | G | Code |
|-----------|---|---|---|---|----|---|---|------|
|-----------|---|---|---|---|----|---|---|------|

BALCONY OUTLET grey only -For asphalt-finished balconies
Details as 2172.3 *Min size hole for roof slab

| | | | | | | | | |
|----|----|----|----|-----|----|----|----|---|
| 82 | 48 | 27 | 59 | 170 | 94 | 13 | 68 |  2174.3 |
|----|----|----|----|-----|----|----|----|---|






| Size (mm) | Colour | Code |
|-----------|--------|------|
|-----------|--------|------|

TWO WAY BALCONY OUTLET

| | | |
|----|---|--|
| 82 | G | |
|----|---|--|

| | | |
|-----|---|--|
| 100 | G | |
|-----|---|--|

Available on request



| Colour | Code |
|--------|------|
|--------|------|

CAP FOR BALCONY OUTLET -For use with 2173.3.25 and 2273.23 when used singly or at top of multi-storey building

| | |
|---|---------------|
| G | 9995.3 |
|---|---------------|

| Colour | Code |
|--------|------|
|--------|------|

SPARE GRID FOR BALCONY OUTLET -for 2172

| | |
|---|-------------|
| G | 9990 |
|---|-------------|

| Colour | Code |
|--------|------|
|--------|------|

SPARE GRID FOR FLAT ROOF OUTLET -for 2170

| | |
|---|-------------|
| G | 9981 |
|---|-------------|

| Colour | Code |
|--------|------|
|--------|------|

SPARE GRID FOR DOMED ROOF OUTLET -for 2171

| | |
|---|-------------|
| G | 9980 |
|---|-------------|

100 Large Diameter


100 Large Diameter PVC-u



200 and 250mm PVC-u soil pipe and fittings:


- Wide range of bends, branches and access fittings
- Manufactured in accordance with B5 EN 1329

| 200 and 250mm PVC-u soil pipe and fittings | |
|--|-------|
| A | T1 |
| 200mm | 4.9mm |
| 250mm | 6.2mm |

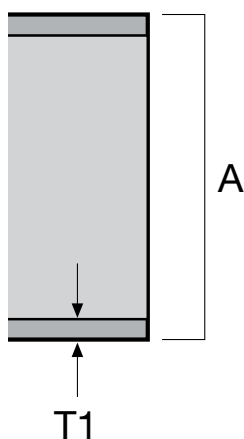


Terrain Soil System


Terrain Large Diameter Soil System - 100 / 100P




| Size (mm) | L | Colour | Code |
|--------------------------------|----|--------|-----------|
| SOIL PIPE - Plain Ended | | | |
| 200 | 4m | G | 100.8.40 |
| 250 | 4m | G | 100.10.40 |



| Size (mm) | L | Colour | Code |
|---|-----|--------|---------|
| STRAIGHT COUPLER - Double Socket | | | |
| 200 | 248 | G | 110P.8 |
| 250 | 310 | G | 110P.10 |
| SLIP COUPLER - Double Socket | | | |
| 200 | 250 | | 111SP.8 |



| Size (mm) | Angle | Z1 | Z2 | Colour | Code |
|---------------------------|-------|-----|-----|--------|-------------|
| SPIGOT SOCKET BEND | | | | | |
| 200 | 135 | 160 | 160 | G | 107P.8.135 |
| 200 | 92.5 | 224 | 224 | G | 107P.8.92 |
| 250 | 135 | 200 | 200 | G | 107P.10.135 |
| 250 | 92.5 | 280 | 280 | G | 107P.10.92 |




| Size (mm) | Angle | L | Z2 | Z3 | Colour | Code |
|--|-------|-----|-----|-----|--------|------------|
| SINGLE EQUAL BRANCH TRIPLE SOCKET | | | | | | |
| 200 | 135 | 355 | 215 | 670 | G | 104P.8.135 |
| 200/200 | 87.5 | 215 | 215 | 430 | G | 104P.8.92 |
| 250/250 | 135 | 480 | 480 | 670 | G | 104.10.135 |
| 250/250 | 87.5 | 290 | 290 | 560 | G | 104.10.92 |


100 Large Diameter

Terrain Large Diameter Soil System - 100 / 100P

| Size (mm) | Angle | Z1 | Z2 | Z3 | Colour | Code |
|--|-------|-----|-----|-----|--------|-------------|
| SINGLE UNEQUAL BRANCH TRIPLE SOCKET | | | | | | |
| 200/110 | 135 | 310 | 310 | 410 | G | 104P.84.135 |
| 200/160 | 135 | 375 | 375 | 500 | G | 104.86.135 |
| 250/160 | 135 | 405 | 405 | 560 | G | 104.106.135 |
| 250/160 | 87.5 | 245 | 245 | 470 | G | 104.106.92 |




| Size (mm) | Angle | Z1 | Z2 | Z3 | Colour | Code |
|----------------------|-------|-----|-----|-----|--------|--------------|
| DOUBLE BRANCH | | | | | | |
| 200/200 | 135 | 370 | 370 | 510 | G | 106P.8.135 |
| 200/200 | 87.5 | 215 | 215 | 430 | G | 106P.8.92 |
| 250/250 | 135 | 480 | 480 | 670 | G | 106.10.135 |
| 250/250 | 87.5 | 290 | 290 | 560 | G | 106.10.92 |
| 250/160 | 135 | 375 | 375 | 500 | G | 106P.106.135 |
| 250/160 | 87.5 | 245 | 245 | 470 | G | 106P.106.92 |



| Size (mm) | L | OD1 | OD2 | Colour | Code |
|------------------------------|-----|-----|-----|--------|---------|
| ACCESS PIPE AND COVER | | | | | |
| 200 | 482 | 200 | 160 | G | 139.8G |
| 250 | 562 | 250 | 160 | G | 139.10G |



| Size (mm) | E / C | L | Colour | Code |
|---|-------|-----|--------|-----------|
| REDUCER (ECCENTRIC / CONCENTRIC) | | | | |
| 200/110 | C | 110 | G | 124.8.4C |
| 200/160 | C | 90 | G | 124.8.6C |
| 250/200 | C | 170 | G | 124.10.8C |
| 200/110 | E | 245 | G | 123P.8.4 |
| 200/160 | E | 270 | G | 123P.8.6 |



Terrain Soil System

100P Soil System - PVC-u (Push-Fit)



82, 110 and 160mm PVC-u soil pipes and fittings for push-fit jointing:

| 82, 110 and 160mm pipe and fittings (Fig.2) | | | | |
|---|-----|----|-----|-----|
| A | D | E | T1 | T2 |
| 82 | 100 | 50 | 3.2 | 3.2 |
| 110 | 132 | 58 | 3.4 | 3.4 |
| 160 | 189 | 70 | 4.1 | 4.1 |

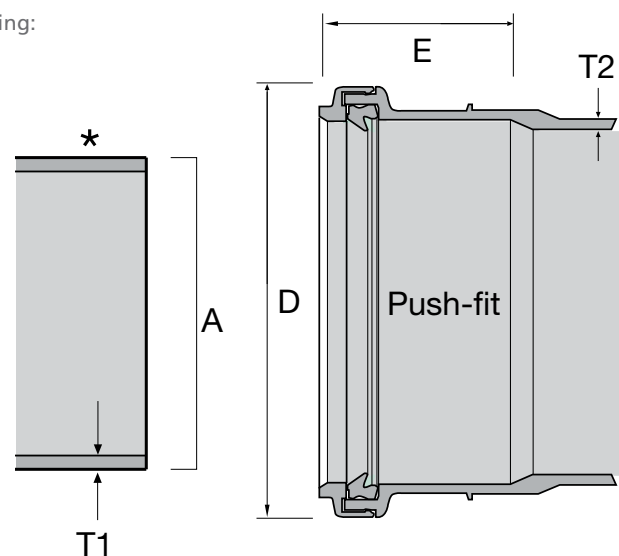



Fig. 2

* Some Terrain fittings feature a groove here, as shown on the underside.


100 Push-Fit

Terrain Soil System - 100 Push-Fit


| | Size (mm) | L1 | T (min) | Colour | Code |
|--|-----------|----|---------|--------|-----------|
| SOIL PIPE - single socket ended | | | | | |
| ♥ | 82 | 3m | 3.2 | G | 100P.3.30 |
| ♥ | 82 | 4m | 3.2 | G | 100P.3.40 |
| ♥ | 110 | 3m | 3.2 | GBW | 100P.4.30 |
| ♥ | 110 | 4m | 3.2 | GBW | 100P.4.40 |
| ♥ | 160 | 3m | 3.3 | G | 100P.6.30 |
| ♥ | 160 | 3m | 3.3 | G | 100P.6.40 |




| | Size (mm) | L | Colour | Code |
|-----------------------------------|-----------|-----|--------|---------|
| SLIP COUPLER DOUBLE SOCKET | | | | |
| ♥ | 82 | 134 | G | 111.S.3 |
| ♥ | 110 | 144 | GB | 111.S.4 |
| ♥ | 160 | 210 | G | 111.S.6 |




| | Size (mm) | L | Z | Colour | Code |
|---|-----------|-----|----|--------|--------|
| STRAIGHT COUPLER DOUBLE SOCKET - with central stop | | | | | |
| ♥ | 82 | 103 | 6 | G | 110P.3 |
| ♥ | 110 | 129 | 6 | GBWR | 110P.4 |
| ♥ | 160 | 188 | 10 | G | 110P.6 |




| | Size (mm) | L1 | L2 | Z | Colour | Code |
|-------------------------------|-----------|-----|----|---|--------|--------|
| PIPE END SOCKET/SPIGOT | | | | | | |
| ♥ | 82 | 91 | 39 | 4 | G | 111P.3 |
| ♥ | 110 | 107 | 48 | 3 | GBW | 111P.4 |



| | Size (mm) | Angle° | L1 | Z1 | Z2 | Colour | Code |
|---------------------------------|-----------|--------|-----|-----|-----|--------|------------|
| SWEPT BEND SPIGOT/SOCKET | | | | | | | |
| ♥ | 82 | 92½ | 149 | 109 | 161 | G | 101P.3.92 |
| ♥ | 110 | 92½ | 142 | 85 | 145 | GBW | 101P.4.92 |
| ♥ | 160 | 92½ | 215 | 135 | 215 | G | 101P.6.92 |
| ♥ | 110 | 112½ | 152 | 104 | 184 | G | 101P.4.112 |
| ♥ | 82 | 135 | 76 | 36 | 89 | G | 107P.3.135 |
| ♥ | 110 | 135 | 89 | 42 | 119 | GBW | 107P.4.135 |
| ♥ | 160 | 135 | 140 | 60 | 130 | G | 107P.6.135 |





| | Size (mm) | Angle° | L1 | Z1 | Z2 | Colour | Code |
|--|-----------|--------|-----|----|-----|--------|-----------|
| TIGHT RADIUS BEND SPIGOT/SOCKET | | | | | | | |
| ♥ | 110 | 92½ | 113 | 65 | 197 | G | 107P.4.92 |





Terrain Soil System


Terrain Soil System - 100 Push-Fit

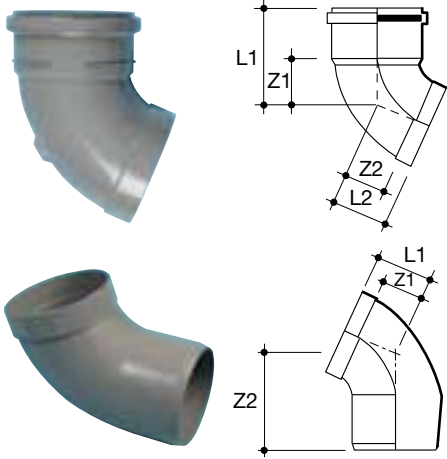



| Size (mm) | L1 | L2 | Z1 | Z2 | Colour | Code | |
|---|-----|-----|----|----|--------|------|-------------|
| OFFSET BEND - top | | | | | | | |
|  | 110 | 119 | 73 | 71 | 54 | GB | 101P.4T.112 |

| Size (mm) | L1 | Z1 | Z2 | Colour | Code | |
|---|-----|----|----|--------|------|-------------|
| OFFSET BEND - bottom | | | | | | |
|  | 110 | 73 | 54 | 127 | GB | 101P.4B.112 |

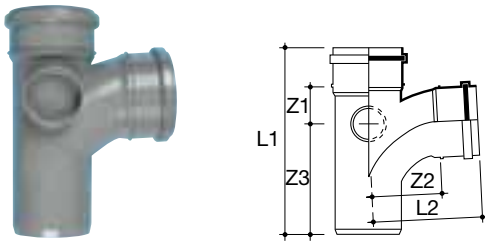



| Size (mm) | Angle° | L1 | L1 | Z1 | Z2 | Z3 | Colour | Code | |
|---|--------|-----|-----|-----|----|----|--------|------|-----------|
| SINGLE BRANCH SPIGOT OUTLET - with spigot bosses, 2 boss horns | | | | | | | | | |
|  | 82 | 92½ | 225 | 125 | 54 | 85 | 131 | G | 104P.3.92 |

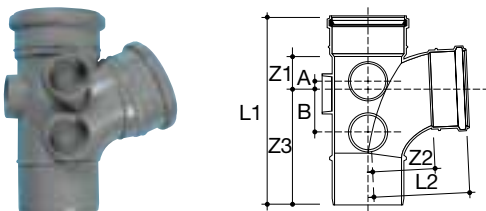


| Size (mm) | Angle° | L1 | L1 | Z1 | Z2 | Z3 | A | B | Colour | Code |
|---|--------|-----|-----|-----|----|-----|-----|----|--------|------------------|
| SINGLE BRANCH SPIGOT OUTLET - with spigot bosses, 5 boss horns | | | | | | | | | | |
| 110 | 92½ | 278 | 152 | 58 | 96 | 164 | 19 | 57 | GBW | 104P.4.92 |
|  | 160 | 92½ | 440 | 242 | 90 | 155 | 260 | | G | 104P.6.92 |

| | | | | | | | | | | |
|---|------|-----|-----|----|----|-----|--|--|---|-------------------|
| SINGLE BRANCH SPIGOT OUTLET - with spigot bosses, 2 boss horns | | | | | | | | | | |
| 110 | 112½ | 349 | 165 | 95 | 95 | 184 | | | G | 104P.4.112 |

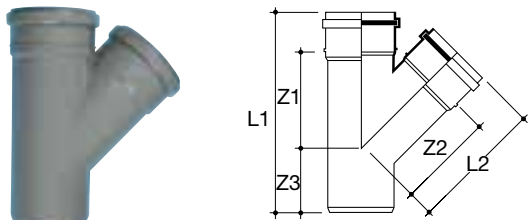

| Size (mm) | Angle° | L1 | L1 | Z1 | Z2 | Z3 | Colour | Code | |
|---|--------|-----|-----|-----|-----|-----|--------|------|------------|
| SINGLE EQUAL BRANCH PLAIN - no boss connections | | | | | | | | | |
|  | 110 | 135 | 328 | 215 | 168 | 168 | 113 | G | 104P.4.135 |

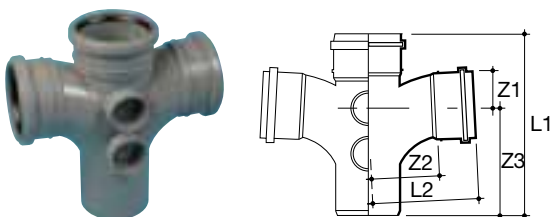



| Size (mm) | Angle° | L1 | L1 | Z1 | Z2 | Z3 | Colour | Code |
|--|--------|-----|-----|----|-----|-----|--------|-----------|
| DOUBLE EQUAL BRANCH SPIGOT OUTLET - 4 boss connections | | | | | | | | |
| 110 | 92½ | 287 | 172 | 66 | 124 | 173 | GB | 106P.4.92 |


All dimensions in mm unless otherwise stated


100 Push-Fit


Terrain Soil System - 100 Push-Fit

| Size (mm) | L1 | L2 | Z1 | Colour | Code |
|--|-----|----|-----|--------|---------------|
| ACCESS PIPE AND COVER SINGLE SOCKET | | | | | |
|  82 | 193 | 97 | 153 | G | 139P.3 |

| Size (mm) | L1 | L2 | Z1 | Colour | Code |
|---|-----|-----|-----|--------|---------------|
| ACCESS PIPE AND COVER SINGLE SOCKET | | | | | |
|  110 | 222 | 114 | 175 | GB | 139P.4 |








| Size (mm) | L1 | L2 | Z1 | Colour | Code |
|---|-----|-----|-----|--------|---------------|
| ACCESS PIPE AND COVER SINGLE SOCKET | | | | | |
| Access door aperture size: 172 x 130mm diameter - secured by 2 screws | | | | | |
|  160 | 366 | 198 | 305 | G | 139P.6 |

| Size (mm) | Angle° | L1 | L2 | Z1 | Z2 | Colour | Code |
|---|--------|----|----|----|-----|--------|------------------|
| ACCESS BEND SINGLE SOCKET Access door aperture size: 110 x 80mm diameter - secured by locking mechanism (use self tapping screw for anti-vandal locking) | | | | | | | |
|  110 | 92½ | 41 | 69 | 91 | 157 | GB | 103P.4.92 |

| Size (mm) | L1 | L2 | Z1 | Z2 | Z3 | Colour | Code |
|--|-----|----|----|-----|-----|--------|------------------|
| ACCESS BEND SINGLE EQUAL BRANCH SINGLE OUTLET - with waste bosses, 4 boss horns. Access door aperture size: 114 x 80mm diameter - secured by locking mechanism (use self tapping screw for anti-vandal locking) | | | | | | | |
|  110 | 136 | 74 | 87 | 105 | 172 | G | 105P.4.92 |

| A | Colour | Code |
|---|--------|-----------------|
| ACCESS DOOR WITH TEST NIPPLE - standard oval access door with test nipple for manometer connection | | |
| 127 | GBWR | 6592/DVW |








| Size (mm) | A | Z1 | Z2 | Colour | Code |
|---|-----|----|----|--------|---------------|
| ACCESS PIPE AND COVER SINGLE SOCKET | | | | | |
| Access door aperture size: 172 x 130mm diameter - secured by 2 screws | | | | | |
| 82 | 81 | 26 | 13 | G | 136P.3 |
| 110 | 102 | 34 | 10 | GBW | 136P.4 |
| 160 | 134 | 34 | 10 | G | 136P.6 |



Terrain Soil System


Terrain Soil System - 100 Push-Fit

NEW - Now allows back-to-back dual connection of similar and/or dissimilar pipe diameters.



| Size (mm) | L1 | Hole Saw Ø | Colour | Code |
|---------------------------------------|-----|------------------------|--------|-------------------|
| STRAP-ON BOSS - for waste pipe | | | | |
| 110/32 | 116 | 60 (part no. 9105.237) | GBW | 112P.4.125 |
| 110/40 | 116 | 60 (part no. 9105.237) | GBW | 112P.4.15 |
| 110/50 | 120 | 60 (part no. 9105.237) | GBW | 112P.4.2 |

| Use on Stack Size (mm) | A† | Z† | Hole Saw Ø | Colour | Code |
|--|-----|----|------------|--------|----------------|
| BOSS ADAPTORS STRAIGHT - for waste pipe | | | | | |
| 82 - 160 | 107 | 61 | 51 | GBW | 117.125 |
| 82 - 160 | 107 | 61 | 51 | GBWR | 117.15 |
| 82 - 160 | 107 | 61 | 51 | GBW | 117.2 |

| Size (mm) | Z1 | Hole Saw Ø | Colour | Code |
|--|----|------------|--------|---|
| ADAPTOR SADDLES - for 40mm waste pipe | | | | |
| 110/40 | 29 | 51 | G |  115P.4 |

| Size (mm) | L1 | L2 | Z1 | Colour | Code |
|---------------------------|-----|----|----|--------|-----------------|
| LEVEL INVERT TAPER | | | | | |
| 82/50 | 117 | 44 | 15 | G | 124P.3.2 |
| 110/50 | 136 | 45 | 16 | GB | 124P.4.2 |
| 110/82 | 140 | 55 | 18 | G | 124P.4.3 |
| 160/110 | 233 | 75 | 44 | G | 124P.6.4 |


| Size (mm) | Z1 | Z2 | Z3 | Colour | Code |
|---------------------------|-----|----|-----|--------|---------------|
| SHORT BOSSSED PIPE | | | | | |
| 82 | 145 | 48 | 97 | G | 123P.3 |
| 110 | 212 | 43 | 110 | GB | 123P.4 |

| Size (mm) | Z1 | Z2 | Z3 | Z4 | Z5 | Colour | Code |
|---|----|----|----|----|----|--------|-------------------|
| FOUR-WAY BOSS PIPE PUSH-FIT SOCKET/SPIGOT - 2 boss horns | | | | | | | |
| 110 | 44 | 40 | 56 | 55 | 59 | G | 120P.412.2 |


100 Push-Fit

Terrain Soil System - 100 Push-Fit


| Size (mm) | L1 | L2 | Z1 | Colour | Code |
|---------------------------|----|----|----|--------|------------------|
| TRIPLE BOSS COLLAR | | | | | |
| 110 | 44 | 40 | 56 | GB | 120P.4.15 |



| Size (mm) | L | Colour | Code |
|--------------------|----|--------|--------------|
| SOCKET PLUG | | | |
| 110 | 69 | GBW | 130.4 |
| 160 | 92 | G | 130.6 |



| Size (mm) | L1 | L2 | L3 | L4 | Z1 | Colour | Code |
|--|-----|-----|-----|-----|-----|--------|------------------|
| UNIVERSAL SOIL MANIFOLD - for push-fit waste connections, for solvent waste connections see page 11 | | | | | | | |
| 110 | 228 | 189 | 199 | 217 | 105 | G | 119P.4.15 |

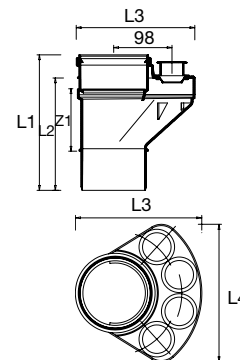


For connection of BS EN 1566/BS 5255 32mm and 40mm waste pipes at floor level. Incorporates 4 inlets to accept 32mm or 40mm waste pipes without need for adaptors. Use with Swivel Elbow or Swept Bend. Complete with 4 sealing gaskets and 3 removable plugs.
For solvent waste connections see page 11.

Refer to page 13 for bracketing options.

Bracketry available to both solvent weld and push-fit systems.



| Size (mm) | A | B | C | D | E | F | Colour | Code |
|--|-----|-----|----|----|-----|----|--------|-----------------|
| TRAPPED FLOOR GULLY - under-floor trap (e.g. for shower areas) with 3 sockets to accept 40mm or 50mm waste pipe | | | | | | | | |
| 110/82 | 110 | 169 | 51 | 43 | 82 | 50 | GT | 281.43 |
| 160/110 | 160 | 169 | 51 | 43 | 110 | 50 | GT | 281.64 |
| 110/82 | 110 | 194 | 64 | 56 | 82 | 75 | GT | 279.432* |




*2" Inlets only. Refer to page 31 for socket reducers if required

Seal depth: 50-75mm. Cleaning access via removable baffle with integral gasket to maintain airtight seal.


| Size (mm) | A | B | Z1 | Z2 | Colour | Code |
|---|----------|-----|----|----|--------|--------------|
| FLOOR GULLY INLETS - two part fitting to be set in standard-tiled floor (e.g. in shower areas). Comprises of raising piece with 50mm top and snap-in cover | | | | | | |
| 110 PVC | 50 x 150 | 110 | 14 | 48 | GW | 282.6 |
| 110 SS | 50 x 150 | 110 | 14 | 48 | Self | 283.6 |



| Size (mm) | Colour | Code |
|-----------------------------------|--------|--------------|
| SEALED GULLY RAISING PIECE | | |
| 110 | GW | 284.6 |



| Size (mm) | Colour | Code |
|-----------------------------------|--------|--------------|
| SEALED GULLY RAISING PIECE | | |
| 110 | Self | 285.6 |



Terrain Waste System

200 Waste System - MuPVC (Solvent-Weld)



Solvent-weld MuPVC system:

- 32, 40 and 50mm integrated systems
- Wide range of bends and adaptors
- Integrated floor gullies

All Terrain fittings and extrusions are manufactured to BS EN ISO 9001: 2000 certification.

| 32, 40 and 50mm pipe and fittings (Fig.3) | | | | | |
|---|----|----|----|----------|----------|
| Nom. | A | B | C | T1 (min) | T2 (min) |
| 32mm | 36 | 42 | 24 | 1.8 | 1.8 |
| 40mm | 43 | 49 | 27 | 1.9 | 1.9 |
| 50mm | 56 | 62 | 30 | 2.0 | 2.0 |

The pipe and socket illustrated here are for solvent weld jointing.


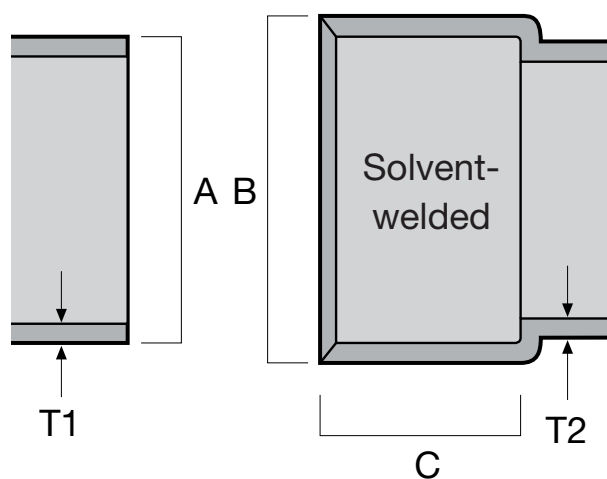


Fig. 3



200 Solvent-Weld

Terrain Waste System - 200 Solvent-Weld


| | Size (mm) | L1 | T (min) | Colour | Code |
|---------------------------------|-----------|----|---------|--------|------------|
| WASTE PIPE - plain-ended | | | | | |
| ♥ | 32 | 3m | 1.8 | GW | 200.125.30 |
| ♥ | 32 | 4m | 1.8 | GBWR | 200.125.40 |
| ♥ | 40 | 3m | 1.9 | GW | 200.15.30 |
| ♥ | 40 | 4m | 1.9 | GBWR | 200.15.40 |
| ♥ | 50 | 3m | 2.0 | W | 200.2.30 |
| ♥ | 50 | 4m | 2.0 | GBW | 200.2.40 |




| | Size (mm) | A | Colour | Code |
|---|-----------|----|--------|-------|
| SEAL RING ADAPTOR - to convert 50mm 207.2 spigot socket bends to expansion fitting | | | | |
| | 50 | 65 | GW | 209.2 |




| | Size (mm) | L | Z | Colour | Code |
|---------------------------------------|-----------|----|---|--------|---------|
| STRAIGHT COUPLER DOUBLE SOCKET | | | | | |
| ♥ | 32 | 52 | 2 | GBWR | 210.125 |
| ♥ | 40 | 58 | 2 | GBWR | 210.15 |
| ♥ | 50 | 65 | 2 | GBW | 210.2 |




| | Size (mm) | L | Z | Colour | Code |
|--|-----------|----|---|--------|---------|
| UNION DOUBLE SOCKET - threaded union for easy disconnection if required | | | | | |
| ♥ | 32 | 59 | 8 | G | 211.125 |
| ♥ | 40 | 65 | 8 | G | 211.15 |
| ♥ | 50 | 73 | 8 | G | 211.2 |



| | Size (mm) | L | Z | Colour | Code |
|---|-----------|----|---|--------|---------|
| EXPANSION COUPLER SEAL RING AND SOLVENT SOCKET | | | | | |
| ♥ | 32 | 67 | 4 | GW | 225.125 |
| ♥ | 40 | 70 | 4 | GW | 225.15 |
| | 50 | 77 | 4 | GW | 225.2 |











| | Size (mm) | Z | Colour | Code |
|------------------------------|-----------|----|--------|---------|
| SPIGOT SOCKET COUPLER | | | | |
| ♥ | 32 | 27 | GW | 227.125 |
| ♥ | 40 | 30 | GW | 227.15 |
| | 50 | 35 | GW | 227.2 |



Terrain Waste System

Terrain Waste System - 200 Solvent-Weld



| Size (mm) | Angle° | Z2 | Z2 | Colour | Code |
|--|--------|----|----|--------|------------|
| SWEPT BEND DOUBLE SOCKET - for 91¼° swept bend, 91¼°, 135° and 165° as standard | | | | | |
| 32 | 91¼ | 34 | 34 | GBWR | 201.125.91 |
| 40 | 91¼ | 38 | 38 | GBWR | 201.15.91 |
| 50 | 91¼ | 45 | 45 | GBW | 201.2.91 |

| Size (mm) | Angle° | Z2 | Z2 | Colour | Code |
|---|--------|----|----|--------|-------------|
| SWEPT BEND DOUBLE SOCKET - for 135° swept bend | | | | | |
| 32 | 135 | 10 | 10 | GBWR | 201.125.135 |
| 40 | 135 | 11 | 11 | GBWR | 201.15.135 |
| 50 | 135 | 14 | 14 | GBW | 201.2.135 |
| 32 | 165 | 5 | 5 | G | 201.125.165 |
| 40 | 165 | 5 | 5 | G | 201.15.165 |
| 50 | 165 | 6 | 6 | G | 201.2.165 |

| Size (mm) | Angle° | Z2 | Z2(max) | Z2(min) | Colour | Code |
|--|--------|----|---------|---------|--------|-------------|
| SPIGOT/SOCKET BENDS - to change pipe direction in limited-space situations, 91½°, 130° and 150° as standard | | | | | | |
| 32 | 91½ | 19 | 92 | 46 | GBW | 207.125.92 |
| 40 | 92½ | 21 | 95 | 52 | GBW | 207.15.92 |
| 50 | 92½ | 29 | 102 | 64 | GBW | 207.2.92 |
| 32 | 135 | 8 | 30 | - | GBW | 207.125.135 |
| 40 | 135 | 11 | 38 | - | GBW | 207.15.135 |
| 50 | 135 | 13 | 46 | - | GBW | 207.2.135 |
| 32 | 150 | 8 | 52 | 29 | GBW | 207.125.150 |
| 40 | 150 | 9 | 49 | 33 | GBW | 207.15.150 |

| Size (mm) | Angle° | Z2 | Z2 | Colour | Code |
|-----------------------------------|--------|----|----|--------|------------|
| KNUCKLE BEND DOUBLE SOCKET | | | | | |
| 32 | 91¼ | 19 | 19 | GBWR | 202.125.91 |
| 40 | 91¼ | 22 | 22 | GBWR | 202.15.91 |

| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|-------------------------------|--------|----|----|----|--------|-----------|
| SWEPT CROSS ALL SOCKET | | | | | | |
| 40 | 91¼ | 44 | 44 | 20 | GW | 206.15.91 |
| 50 | 91¼ | 51 | 51 | 25 | GW | 206.2.91 |
| 50 | 135 | 13 | 71 | 71 | G | 206.2.135 |

| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|---|--------|----|----|----|--------|-------------|
| SWEPT TEE ALL SOCKET - 91¼°, 135° and 165° as standard | | | | | | |
| 32 | 91¼ | 30 | 30 | 19 | GBWR | 204.125.91 |
| 40 | 91¼ | 32 | 35 | 22 | GBWR | 204.15.91 |
| 50 | 91¼ | 43 | 43 | 29 | GBW | 204.2.91 |
| 32 | 135 | 8 | 48 | 48 | GW | 204.125.135 |
| 40 | 135 | 10 | 57 | 57 | GW | 204.15.135 |
| 50 | 135 | 13 | 71 | 71 | GBW | 204.2.135 |

All dimensions in mm unless otherwise stated

200 Solvent-Weld

Terrain Waste System - 200 Solvent-Weld

| Size (mm) | A | L | Z | Colour | Code |
|--|----|----|----|--------|------------|
| LEVEL INVERT TAPER - to reduce socket of any standard fitting to accept a smaller size pipe. Larger end spigot and smaller end socket | | | | | |
| 40/32 | 4 | 73 | 47 | G | 223.15.125 |
| 50/32 | 10 | 98 | 73 | GW | 223.2.125 |
| 50/40 | 7 | 62 | 62 | G | 223.2.15 |







| Size (mm) | A | Z | Colour | Code |
|-----------------------|---|---|--------|------------|
| SOCKET REDUCER | | | | |
| 40/32 | 0 | 3 | GBWR | 224.15.125 |
| 50/32 | 7 | 6 | GBW | 224.2.125 |
| 50/40 | 4 | 3 | GBW | 224.2.15 |

| Size (mm) | A | B | Colour | Code |
|-------------------------|----|----|--------|---------|
| PIPE FIXING CLIP | | | | |
| 32 | 33 | 54 | GBWR | 240.125 |
| 40 | 37 | 60 | GBWR | 240.15 |
| 50 | 43 | 76 | GBW | 240.2 |

| Size (mm) | A | B | Colour | Code |
|---|----|----|--------|---------|
| EXPANSION FITTING FIXING CLIP - to secure control thermal expansion at regular points along pipework | | | | |
| 32 | 33 | 54 | GW | 242.125 |
| 40 | 37 | 60 | W | 242.15 |
| 50 | 43 | 76 | GW | 242.2 |







| Size (mm) | L | Colour | Code |
|--------------------|----|--------|---------|
| ACCESS PLUG | | | |
| 32 | 47 | GBW | 237.125 |
| 40 | 54 | GBW | 237.15 |
| 50 | 56 | GBW | 237.2 |

| Size (mm) | A | B | Colour | Code |
|-------------------------|----|----|--------|-------|
| WEATHERING APRON | | | | |
| 50 | 76 | 38 | G | 231.2 |



Terrain Waste System

Terrain Waste System - 200 Solvent-Weld




| Size (mm) | A | Colour | Code |
|------------------|----|--------|--------------|
| VENT COWL | | | |
| 50 | 34 | GW | 250.2 |

| Size (mm) | A | B | L | L1 | C | D | Colour | Code |
|--|----|----|----|----|----|----|--------|-------------|
| AUTOMATIC AIR ADMITTANCE VALVE - allows air into waste system when negative pressure occurs, helps prevent syphonage of traps | | | | | | | | |
| 32/40/50 | 65 | 26 | 80 | 55 | 25 | 25 | W | 253W |



| Size (mm) | A | L | Colour | Code |
|---|---|----|--------|---------------|
| ADAPTOR TO UNDERGROUND DRAIN - push-fit connection into pipes with nominal 100mm bore, external use only | | | | |
| 32/40/50 | 8 | 40 | B | 4DW200 |

Note: As a Terrain Underground product different discount structure applies.



| Size (mm) | A | B | Z | Colour | Code |
|--|----|----|-----|--------|--------------|
| POST FORMED STOCKET - supplied with seal ring | | | | | |
| 50 | 70 | 42 | 358 | G | 226.2 |

Note: Use with 9132.2




| Size (mm) | A | B | C | D | Colour | Code |
|---|----|----|----|----|--------|------------|
| CAULKING BUSH - for connecting MuPVC waste pipe to 50mm socket of other material. Solvent-weld to pipe | | | | | | |
| 32/42/50 | 43 | 36 | 56 | 70 | G | 232 |


200 Solvent-Weld

Terrain Waste System - 200 Solvent-Weld



| Size (mm) | A | L | Z | Colour | Code |
|--|----|----|----|--------|---------|
| REVERSE NUT ADAPTOR - for solvent-weld connection of MuPVC waste pipe (or waste fitting) to BSP male threaded fitting or pipe | | | | | |
| 32/32 | 15 | 50 | 11 | W | 218.125 |
| 40/40 | 15 | 53 | 11 | W | 218.15 |




| Size (mm) | A | L | Z | Colour | Code |
|--|----|----|---|--------|---------|
| 200 WASTE TO MALE IRON - socket and threaded socket - for solvent-weld connection of MuPVC waste pipe or fitting to BSP threaded male pipe or fitting | | | | | |
| 32/32 | 23 | 51 | 3 | G | 212.125 |
| 40/40 | 23 | 54 | 3 | G | 212.15 |
| 50/50 | 23 | 57 | 3 | G | 212.2 |




| Size (mm) | A | Z | Colour | Code |
|--|----|---|--------|---------|
| 200 WASTE TO MALE IRON - spigot and threaded socket - for solvent-weld connection of MuPVC waste pipe or fitting to BSP threaded male pipe or fitting | | | | |
| 32/32 | 23 | 3 | G | 216.125 |
| 40/40 | 23 | 3 | G | 216.15 |
| 50/50 | 23 | 3 | G | 216.2 |



| Size (mm) | A | L | Z | Colour | Code |
|--|----|----|---|--------|---------|
| 200 WASTE TO FEMALE IRON - socket and threaded socket - for solvent-weld connection of MuPVC waste pipe or fitting to BSP threaded female pipe or fitting | | | | | |
| 32/32 | 19 | 48 | 3 | G | 213.125 |
| 40/40 | 19 | 51 | 3 | GW | 213.15 |
| 50/50 | 19 | 54 | 3 | GW | 213.2 |



| Size (mm) | A | Z | Colour | Code |
|--|----|---|--------|---------|
| 200 WASTE TO FEMALE IRON - spigot and threaded socket - for solvent-weld connection of MuPVC waste pipe or fitting to BSP threaded female pipe or fitting | | | | |
| 32/32 | 19 | 6 | G | 217.125 |
| 40/40 | 19 | 6 | G | 217.15 |
| 50/50 | 19 | 6 | GW | 217.2 |



Terrain Waste System

300 Waste System - Polypropylene (Push-Fit)



Push-fit polypropylene system:

- 32, 40 and 50mm integrated systems
- Quick and easy to install
- Saves time and labour costs
- Resistant to most oils, bleaches and detergents
- Wide range of bends and fittings

| 32, 40 and 50mm pipe and fittings (Fig.4) | | | | | |
|---|----|----|----|----------|----------|
| Nom. | A | D | E | T1 (min) | T2 (min) |
| 32mm | 35 | 41 | 20 | 1.8 | 1.8 |
| 40mm | 41 | 47 | 23 | 1.9 | 1.9 |
| 50mm | 54 | 61 | 29 | 2.0 | 2.0 |

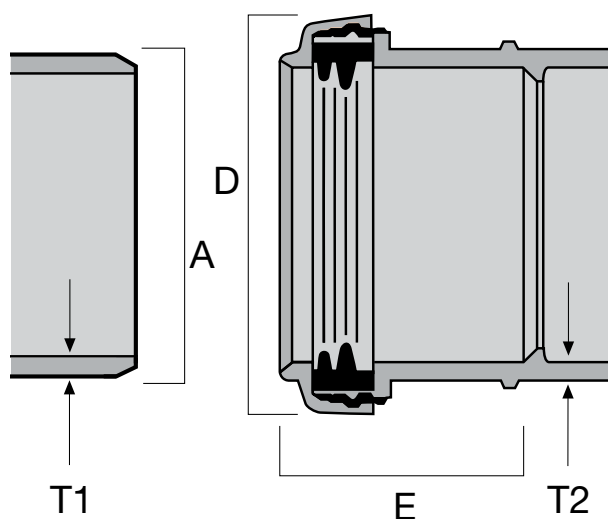


Fig. 4 Seal ring jointing

* Some Terrain fittings feature a groove here, as shown on the underside.

300 Push-Fit

Terrain Waste System - 300 Push-Fit

| Size (mm) | L | T (min) | Colour | Code |
|---------------------------------|----|---------|--------|------------|
| WASTE PIPE - plain-ended | | | | |
| 32 | 3m | 1.8 | GBW | 300.125.30 |
| 40 | 3m | 1.9 | GBW | 300.15.30 |
| 50 | 3m | 2 | G | 300.2.30 |

| Size (mm) | L | Z1 | Colour | Code |
|---------------------------------------|----|----|--------|---------|
| STRAIGHT COUPLER DOUBLE SOCKET | | | | |
| 32 | 80 | 2 | GBW | 310.125 |
| 40 | 80 | 2 | GBW | 310.15 |
| 50 | 70 | 2 | G | 310.2 |








| Size (mm) | Angle° | Z1 | Colour | Code |
|--|--------|----|--------|------------|
| SWEPT BEND DOUBLE SOCKET - for 91¼° swept bend, 91¼° and 135° as standard | | | | |
| 32 | 91¼ | 55 | GBW | 301.125.91 |
| 40 | 91¼ | 55 | GBW | 301.15.91 |
| 50 | 91¼ | 65 | G | 301.2.91 |

| Size (mm) | Angle° | Z1 | Colour | Code |
|--|--------|----|--------|-------------|
| SWEPT BEND DOUBLE SOCKET - for 135° swept bend, 91¼° and 135° as standard | | | | |
| 32 | 135 | 10 | GBW | 301.125.135 |
| 40 | 135 | 11 | GBW | 301.15.135 |
| 50 | 135 | 14 | G | 301.2.135 |

| Size (mm) | Angle° | Z1 | Colour | Code |
|---------------------------------------|--------|----|--------|------------|
| KNUCKLE BEND 90° DOUBLE SOCKET | | | | |
| 32 | 90 | 20 | GBW | 302.125.90 |
| 40 | 90 | 23 | GBW | 302.15.90 |
| 50 | 90 | 28 | G | 302.2.90 |

| Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|---|--------|----|----|--------|------------|
| SWIVEL ELBOW BEND 90° SINGLE SOCKET/SPIGOT | | | | | |
| 32 | 90 | 30 | 60 | GW | 307.125.90 |
| 40 | 90 | 25 | 60 | GW | 307.15.90 |


| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|-----------------------|--------|----|----|----|--------|------------|
| SWEPT TEE 91¼° | | | | | | |
| 32 | 91¼ | 25 | 30 | 35 | GBW | 304.125.91 |
| 40 | 91¼ | 30 | 33 | 40 | GBW | 304.15.91 |
| 50 | 91¼ | 35 | 40 | 46 | G | 304.2.91 |




G - Grey B - Black W - White R - Rustic Brown

Terrain Waste System


Terrain Waste System - 300 Push-Fit




| Size (mm) | Z1 | Colour | Code |
|--|----|--------|------------|
| LEVEL INVERT TAPER - to reduce waste socket to accept smaller diameter waste pipe | | | |
| 40/32 | 35 | GBW | 323.15.125 |
| 50/32 | 35 | G | 323.2.125 |
| 50/40 | 35 | G | 323.2.15 |



| Size (mm) | L1 | C1 | C2 | Colour | Code |
|------------------------------|----|----|----|--------|---------|
| PIPE AND FITTING CLIP | | | | | |
| 32 | 70 | 34 | 54 | GBW | 340.125 |
| 40 | 77 | 37 | 61 | GBW | 340.15 |
| 50 | 60 | 51 | 22 | G | 340.125 |



| Size (mm) | L1 | Z1 | Colour | Code |
|--------------------|----|----|--------|---------|
| ACCESS PLUG | | | | |
| 32 | 55 | 17 | GBW | 337.125 |
| 40 | 49 | 17 | GBW | 337.15 |
| 50 | 59 | 10 | G | 337.2 |



| Size (mm) | L1 | Z1 | Colour | Code |
|---|----|----|--------|---------|
| TANK CONNECTOR - for connecting push-fit polypropylene pipe to water tank, supplied with 2 sealing washers | | | | |
| 32 | 24 | 7 | GW | 311.125 |
| 40 | 24 | 7 | GW | 311.15 |
| 50 | 25 | 7 | G | 311.2 |

300 Push-Fit

Terrain Traps & Pan Connectors

400 Traps System

As part of Terrain All Round Drainage Solutions, a comprehensive new range of traps and pan connectors has been introduced. All products are manufactured in the UK and carry the kitemark.

Polypropylene traps

- Range of 40 traps
- 32mm & 40mm polypropylene traps
- Premium quality
- Kitemarked
- Manufactured to BS 3943
- Manufactured in the UK
- Pipe stiffener with every trap
- Range includes telescopic and anti siphon traps



Pan connectors

- Wide range of 30 pan connectors
- Push Fit and solvent weld
- Premium quality
- Kitemarked
- Manufactured to BS 3943
- Manufactured in the UK
- Range includes variable degree and offset connectors

32, 40 and 50mm sockets (Fig.5)

| Size | A | B (min) |
|------|----|---------|
| 32mm | 55 | 42 |
| 40mm | 65 | 49 |

Tubular 'S' traps limits (Fig.5a) (trap folded)

| Part no. | C (max) | C (min) |
|----------|---------|---------|
| 432.125 | 136 | 50 |
| 432.15 | 150 | 60 |

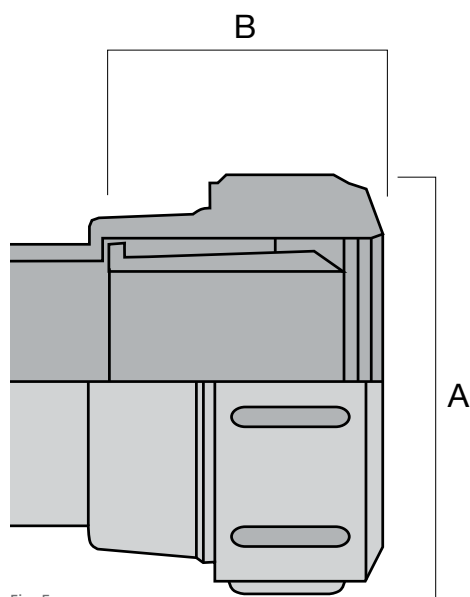


Fig. 5

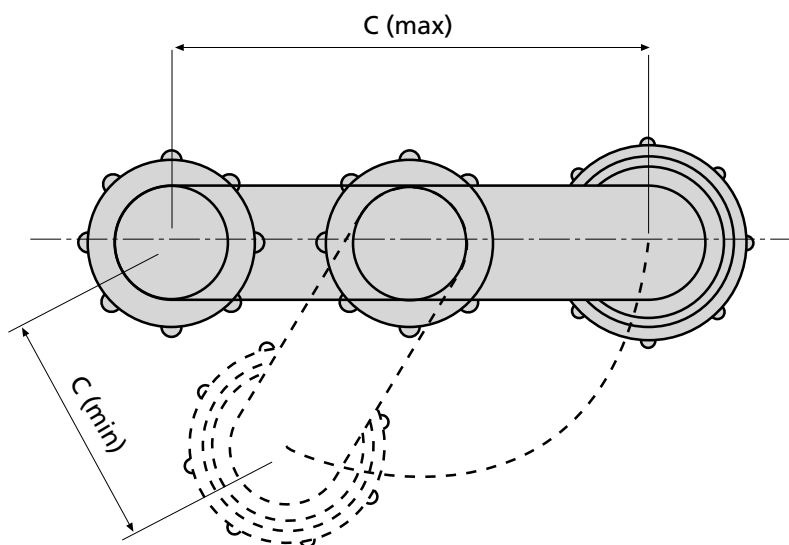


Fig. 5a

400 System

Terrain Traps System - Waste Traps 400

| | Size (mm) | Z2 | B | L | Colour | Code |
|--------------------------------------|-----------|----|----|-----|--------|---------|
| BOTTLE TRAP - 75mm water seal | | | | | | |
| ♥ | 32 | 39 | 26 | 152 | W | 411.125 |
| ♥ | 40 | 40 | 33 | 160 | W | 411.15 |







| | Size (mm) | Z2 | B | L | Colour | Code |
|--|-----------|----|----|-----|--------|-----------|
| BOTTLE TRAP ANTI-SYPHON - 75mm water seal | | | | | | |
| ♥ | 32 | 39 | 26 | 155 | W | 411AS.125 |
| ♥ | 40 | 40 | 33 | 163 | W | 411AS.15 |

| | Size (mm) | Z2 | B | L | Colour | Code |
|--|-----------|----|----|-----|--------|---------|
| RESEALING BOTTLE TRAP - 75mm water seal | | | | | | |
| ♥ | 32 | 39 | 26 | 151 | W | 415.125 |
| ♥ | 40 | 40 | 33 | 163 | W | 415.15 |

| | Size (mm) | Z2 | B | L | Colour | Code |
|--|-----------|----|----|-----------|--------|----------|
| BOTTLE TRAP - ADJUSTABLE TELESCOPIC - 75mm water seal | | | | | | |
| ♥ | 32 | 39 | 26 | 168 - 268 | W | 411T.125 |
| ♥ | 40 | 40 | 33 | 173 - 272 | W | 411T.15 |








| | Size (mm) | Z2 | B | L | Colour | Code |
|--|-----------|----|----|-----------|--------|-----------|
| BOTTLE TRAP ANTI-SYPHON - ADJUSTABLE TELESCOPIC - 75mm water seal | | | | | | |
| ♥ | 32 | 39 | 26 | 168 - 268 | W | 421AS.125 |
| ♥ | 40 | 40 | 33 | 173 - 272 | W | 421AS.15 |

| | Size (mm) | Z2 | B | L | Colour | Code |
|--|-----------|----|----|-----------|--------|---------|
| RESEALING BOTTLE TRAP - ADJUSTABLE TELESCOPIC - 75mm water seal | | | | | | |
| ♥ | 32 | 39 | 26 | 168 - 268 | W | 421.125 |
| ♥ | 40 | 40 | 33 | 173 - 272 | W | 421.15 |



Terrain Traps & Pan Connectors

Terrain Traps System - Waste Traps 400



| Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----|----|----|----|--------|---------|
| TUBULAR SWIVEL P TRAP - 75mm water seal | | | | | | |
| 32 | 135 | 57 | 57 | 24 | W | 431.125 |
| 40 | 140 | 64 | 64 | 30 | W | 431.15 |

| Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----------|----|----|----|--------|----------|
| TUBULAR SWIVEL P TRAP - ADJUSTABLE TELESCOPIC - 75mm water seal | | | | | | |
| 32 | 142 - 242 | 57 | 57 | 24 | W | 431T.125 |
| 40 | 150 - 250 | 64 | 64 | 30 | W | 431T.15 |

| Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----|----|----|----|--------|-----------|
| TUBULAR SWIVEL P TRAP ANTI-SYPHON - 75mm water seal | | | | | | |
| 32 | 135 | 57 | 57 | 24 | W | 431AS.125 |
| 40 | 140 | 64 | 64 | 30 | W | 431AS.15 |

| Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----------|----|----|----|--------|------------|
| TUBULAR SWIVEL P TRAP ANTI-SYPHON - ADJUSTABLE TELESCOPIC 75mm water seal | | | | | | |
| 32 | 142 - 242 | 57 | 57 | 24 | W | 431TAS.125 |
| 40 | 150 - 250 | 64 | 64 | 30 | W | 431TAS.15 |

| Size (mm) | Z1 | Z2 | Colour | Code |
|--|----|----|--------|------------|
| P TO S TRAP CONVERSION BEND - to convert tubular P traps to S traps | | | | |
| 32 | 54 | 86 | W | 407.125.90 |
| 40 | 60 | 90 | W | 407.15.90 |

| Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----|-----|----|----|--------|---------|
| TUBULAR SWIVEL S TRAP - 75mm water seal | | | | | | |
| 32 | 135 | 111 | 54 | 57 | W | 432.125 |
| 40 | 142 | 127 | 61 | 64 | W | 432.15 |

| Size (mm) | L | Z1 | Z2 | Z3 | Colour | Code |
|---------------------------------------|-----|----|----|----|--------|---------|
| RUNNING TRAP - 75mm water seal | | | | | | |
| 32 | 118 | 28 | 60 | 28 | W | 445.125 |
| 40 | 124 | 30 | 64 | 30 | W | 445.15 |

All dimensions in mm unless otherwise stated

400 System

Terrain Traps System - Waste Traps 400

| Size (mm) | L | Z1 | Z2 | Z3 | Colour | Code |
|---|-----|----|----|----|--------|-----------|
| RUNNING TRAP ANTI-SYPHON - 75mm water seal | | | | | | |
| 32 | 118 | 28 | 60 | 28 | W | 445AS.125 |
| 40 | 124 | 30 | 64 | 30 | W | 445AS.15 |


| Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|---|-----|----|----|----|--------|--------|
| WASHING MACHINE HALF TRAP - 75mm water seal with adaptor | | | | | | |
| 40 | 164 | 57 | 64 | 24 | W | 433.15 |

| Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|---|-----|----|----|----|--------|----------|
| WASHING MACHINE HALF TRAP ANTI-SYPHON - 75mm water seal with adaptor | | | | | | |
| 40 | 164 | 57 | 64 | 24 | W | 433AS.15 |

| Size (mm) | L | L2 | C | Z1 | Z2 | Colour | Code |
|--|-----|-----|----|----|----|--------|--------|
| WASHING MACHINE TRAP WITH UPSTAND - 75mm water seal with 0.6m upstand and 2 clips | | | | | | | |
| 40 | 600 | 126 | 57 | 64 | 24 | W | 434.15 |


| Size (mm) | L | L2 | C | Z1 | Z2 | Colour | Code |
|--|-----|-----|----|----|----|--------|----------|
| WASHING MACHINE TRAP ANTI-SYPHON WITH UPSTAND - 75mm water seal with 0.6m upstand and 2 clips | | | | | | | |
| 40 | 600 | 126 | 57 | 64 | 24 | W | 434AS.15 |

| Size (mm) | L | Z1 | Z2 | Colour | Code |
|--|----|-----|----|--------|--------|
| BATH TRAP WITH CLEANING EYE - 20mm water seal | | | | | |
| 40 | 65 | 102 | 12 | W | 455.15 |

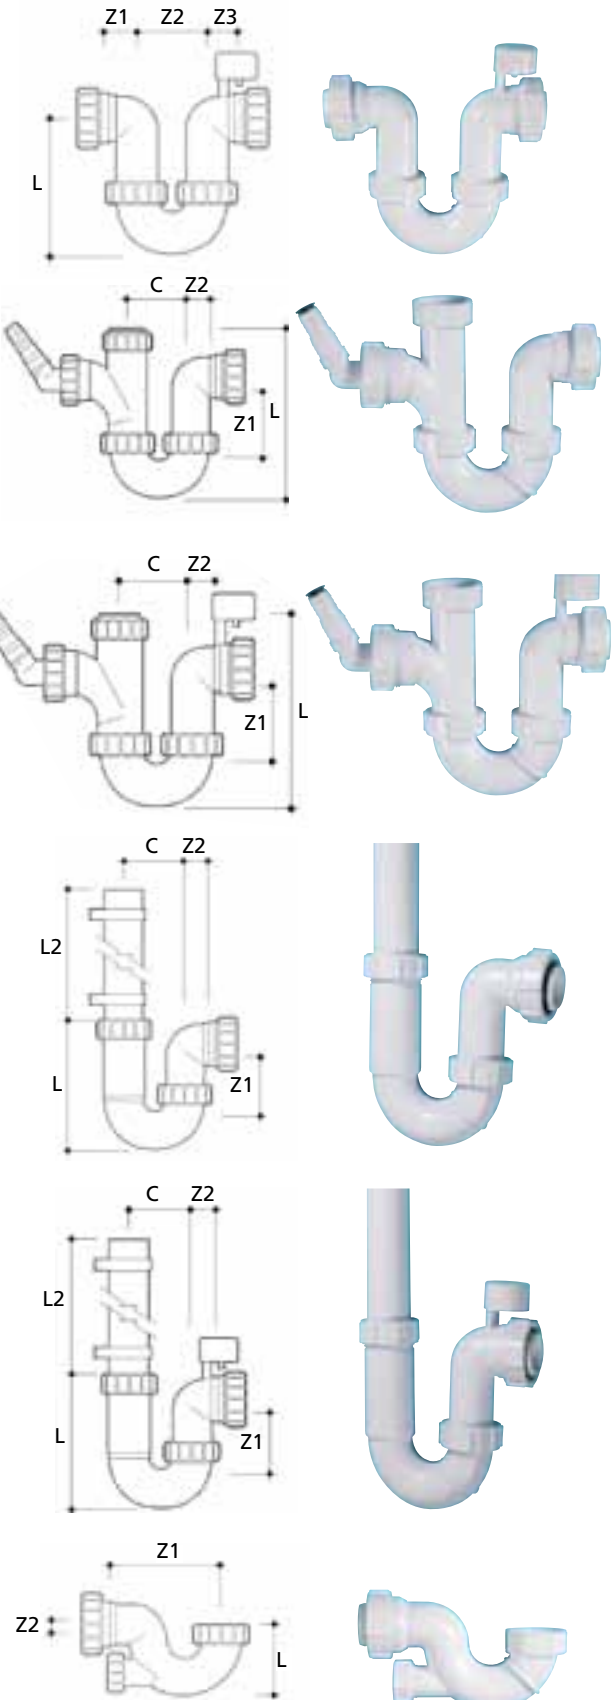


Terrain Traps & Pan Connectors

Terrain Traps System - Waste Traps 400

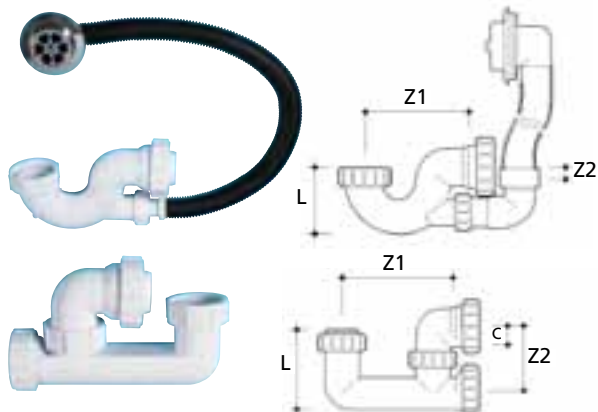


| | Size (mm) | L | Z1 | Z2 | Colour | Code |
|--|-----------|----|-----|----|--------|--------|
| BATH TRAP C/W OVERFLOW HOSE AND CP ROSE - 20mm water seal | | | | | | |
| ♥ | 40 | 65 | 102 | 12 | W | 456.15 |


| | Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----------|----|----|-----|----|--------|--------|
| LOW LEVEL BATH TRAP - 38mm water seal | | | | | | | |
| ♥ | 40 | 85 | 21 | 120 | 70 | W | 457.15 |

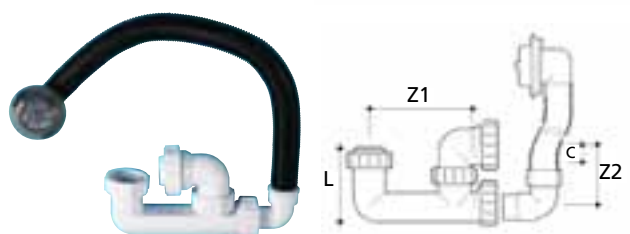


| | Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----------|----|----|-----|----|--------|--------|
| LOW LEVEL BATH TRAP C/W OVERFLOW HOSE AND CP ROSE - 38mm water seal | | | | | | | |
| ♥ | 40 | 85 | 21 | 120 | 70 | W | 459.15 |

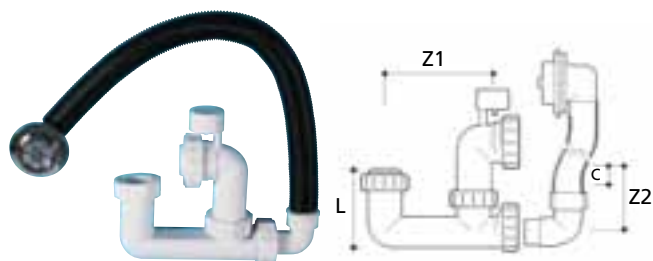

| | Size (mm) | L | C | Z1 | Z2 | Colour | Code |
|--|-----------|----|----|-----|-----|--------|--------|
| LOW LEVEL BATH TRAP ANTI-SYPHON C/W OVERFLOW HOSE AND CP ROSE - 75mm water seal | | | | | | | |
| ♥ | 40 | 85 | 58 | 120 | 102 | W | 451.15 |

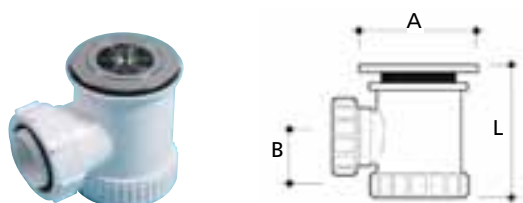

| | Size (mm) | A | B | L | Colour | Code |
|---|-----------|----|----|----|--------|--------|
| SHOWER TRAP - 19mm water seal, 70mm grid | | | | | | |
| ♥ | 40 | 88 | 40 | 99 | W | 482.15 |
| ♥ | 40 | 88 | 40 | 99 | C/P | 483.15 |

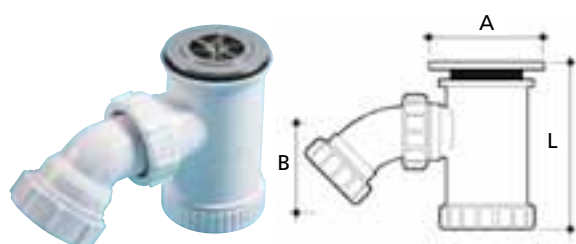

| | Size (mm) | A | B | L | Colour | Code |
|---|-----------|----|----|-----|--------|--------|
| SHOWER TRAP WITH 45° ADJUSTABLE WASTE - 50mm water seal, 70mm grid | | | | | | |
| ♥ | 40 | 88 | 64 | 129 | W | 484.15 |
| ♥ | 40 | 88 | 64 | 129 | C/P | 486.15 |

400 System

Terrain Traps System - WC Pan Connectors 490

| | Size (mm) | L | Z1 | Z2 | Colour | Code |
|---------------------------------------|-----------|-----|----|-----|--------|-----------|
| STRAIGHT WC CONNECTOR FIN SEAL | | | | | | |
| ♥ | 110 | 127 | 30 | 114 | W | 499P.4.00 |







| | Size (mm) | Angle° | L | Z1 | Z2 | Colour | Code |
|---------------------------------------|-----------|--------|-----|-----|-----|--------|-----------|
| 90° WC CONNECTOR FIN SEAL BEND | | | | | | | |
| ♥ | 110 | 90 | 118 | 116 | 250 | W | 499P.4.90 |

| | Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|--|-----------|--------|----|----|--------|------------|
| 14° WC CONNECTOR FIN SEAL SPIGOTS | | | | | | |
| ♥ | 110 | 14 | 15 | 81 | W | 499P.4.104 |

| | Size (mm) | L | Z1 | Z2 | Colour | Code |
|--|-----------|-----|----|----|--------|------------|
| 40MM OFFSET WC CONNECTOR FIN SEAL | | | | | | |
| ♥ | 110 | 131 | 33 | 40 | W | 494P1.4.00 |
| 12MM OFFSET WC CONNECTOR FIN SEAL | | | | | | |
| ♥ | 110 | 117 | 11 | 11 | W | 494P2.4.00 |


| | Size (mm) | Angle° | | | | Colour | Code |
|--|-----------|--------|-----|----|-----|--------|------------|
| SWIVEL CONNECTOR 0-30° FIN SEAL | | | | | | | |
| ♥ | 110 | 0-30 | 118 | 45 | 114 | W | 498P.4.030 |

| | Size (mm) | Angle° | L | Z1 | Z2 | Colour | Code |
|--|-----------|--------|-----|----|-----|--------|-----------|
| SWAN NECK WC CONNECTOR 90° FIN SEAL | | | | | | | |
| ♥ | 110 | 90 | 175 | 16 | 139 | W | 496P.4.90 |




Terrain Traps & Pan Connectors


Terrain Traps System -WC Pan Connectors 490

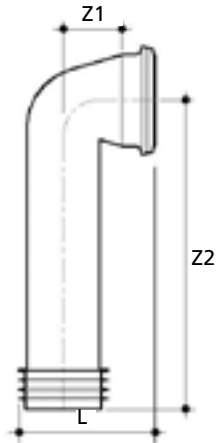


| | Size (mm) | Angle° | L | Z1 | Z2 | Colour | Code |
|---|-----------|--------|-----|----|-----|--------|-----------|
| LONG 90° WC CONNECTOR FIN SEAL - 225mm leg | | | | | | | |
| ♥ | 110 | 90 | 172 | 74 | 390 | W | 491P.4.90 |




| | Size (mm) | Angle° | L | Z1 | Z2 | Colour | Code |
|--|-----------|--------|-----|----|-----|--------|-----------|
| 90° WC CONNECTOR WITH BOSS FIN SEAL | | | | | | | |
| ♥ | 110 | 90 | 171 | 73 | 138 | W | 495P.4.90 |



| | Size (mm) | L | Z1 | Z2 | Colour | Code |
|------------------------|-----------|-----|----|-----|--------|---------|
| EXTENSION 200MM | | | | | | |
| ♥ | 110 | 250 | 54 | 114 | W | 493P.00 |



| | Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|--|-----------|--------|----|----|--------|----------|
| WC MANIFOLD CONNECTORS FIN SEAL SPIGOT - when used in conjunction with a branch 104, up to seven WC pans can be connected either side of the soil stack | | | | | | |
| | 110 | 5 | 14 | 58 | W | 499.4.05 |
| | 110 | 14 | 19 | 58 | W | 499.4.14 |
| | 110 | 24 | 24 | 58 | W | 499.4.24 |
| | 110 | 34 | 26 | 70 | W | 499.4.34 |




| | Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|--|-----------|--------|----|----|--------|------------|
| WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | | | | | | |
| | 110 | 5 | 7 | 65 | B | 497.35.05 |
| | 110 | 14 | 11 | 65 | B | 497.35.14 |
| | 110 | 24 | 14 | 70 | B | 497.35.24 |
| | 110 | 34 | 18 | 77 | B | 497.35.34 |
| | 110 | 9 | 9 | 63 | B | F497.35.09 |
| | 110 | 18 | 11 | 67 | B | F497.35.18 |
| | 110 | 29 | 18 | 77 | B | F497.35.29 |


400 System

Terrain Traps System - WC Pan Connectors 490


| Size (mm) | Angle° | L | Z1 | Z2 | Colour | Code |
|---|--------|-----|----|-----|--------|----------|
| WC CONNECTOR 90° SPIGOT OUTLET - for connection of WC pans to existing soil or waste pipework previously connected to traditional 'S' mode pan | | | | | | |
| 110 | 90 | 150 | 63 | 240 | W | 499.4.90 |

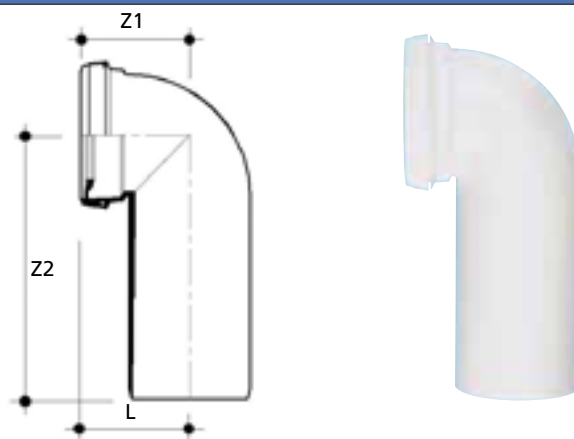


| Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|---|--------|----|----|--------|-----------|
| WC VARIABLE CONNECTOR VARIABLE BEND - adjustable 0-25° | | | | | |
| 110 | 0-25 | 45 | 86 | W | 498.4.025 |

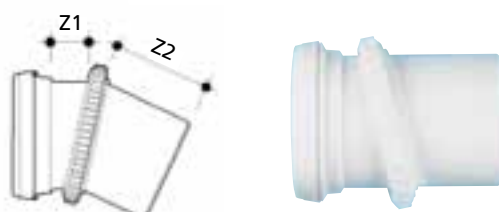


| Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|------------------------------------|--------|----|-----|--------|----------|
| WC CONNECTORS SOCKET OUTLET | | | | | |
| 110 | 2½ | 12 | 101 | W | 498.4.02 |

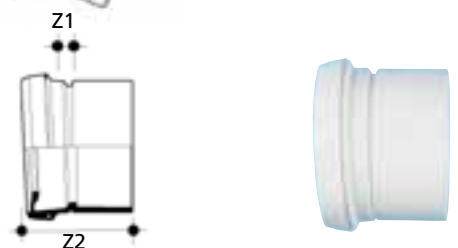


| Size (mm) | Angle° | L | Z1 | Z2 | Colour | Code |
|------------------------------------|--------|-----|-----|----|--------|----------|
| WC CONNECTORS SOCKET OUTLET | | | | | | |
| 110 | 90 | 209 | 123 | 53 | W | 498.4.90 |

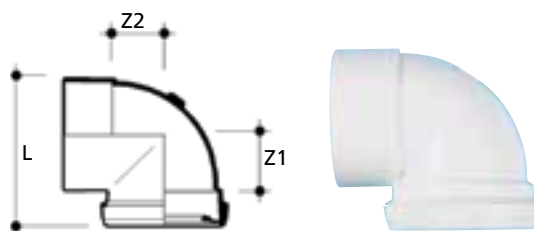

| Size (mm) | Angle° | L | Z1 | Z2 | Colour | Code |
|---|--------|-----|----|-----|--------|---------|
| 90° WC TURNED CONNECTOR SOCKET OUTLET - for connecting non BS 5503 WC pans to soil pipes | | | | | | |
| 110 | 90 | 208 | 72 | 106 | W | 492.4.5 |

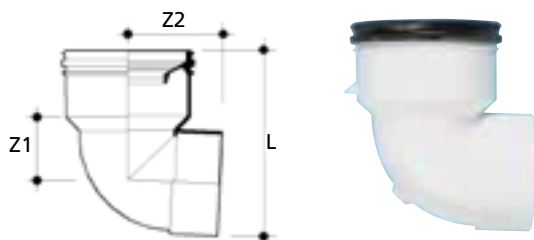


| Size (mm) | L | Z1 | Z2 | Colour | Code |
|---|-----|----|-----|--------|---------|
| WC STRAIGHT CONNECTOR SOCKET OUTLET - for connecting non BS 5503 WC pans to soil pipes | | | | | |
| 110 | 120 | 12 | 133 | W | 495.4.5 |

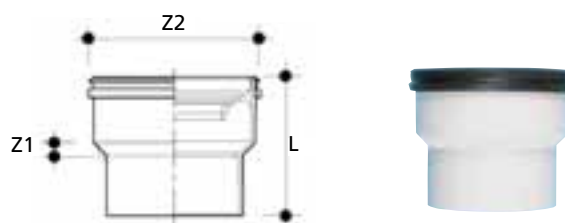

Terrain Waste System

500 Overflow System - for Cold, Non-Pressure Water.
Sockets are for Solvent-Weld Jointing

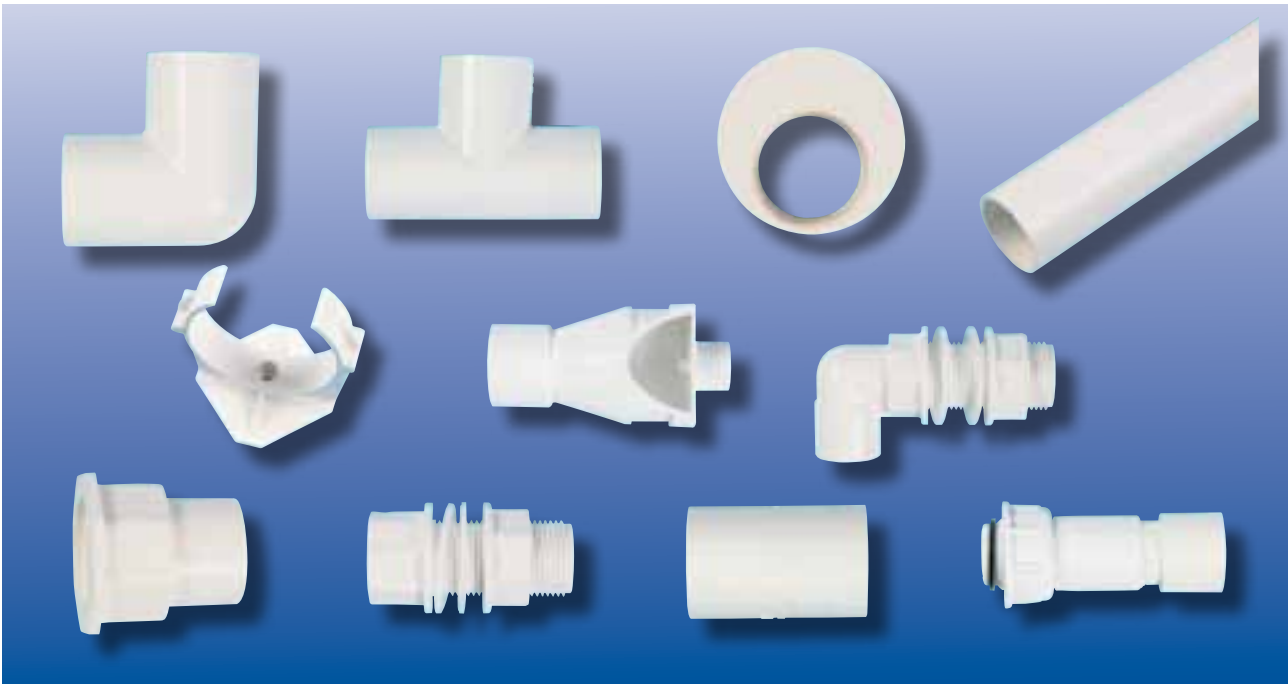

Solvent-weld PVC-u system for cold, non-pressure water:

- 19mm PVC-u pipe and fittings
- Range of tank connectors

| 19mm pipe and fittings (Fig.5) | | | |
|--------------------------------|----|----------|----------|
| A | B | T1 (min) | T2 (min) |
| 21 | 19 | 1.1 | 2.0 |


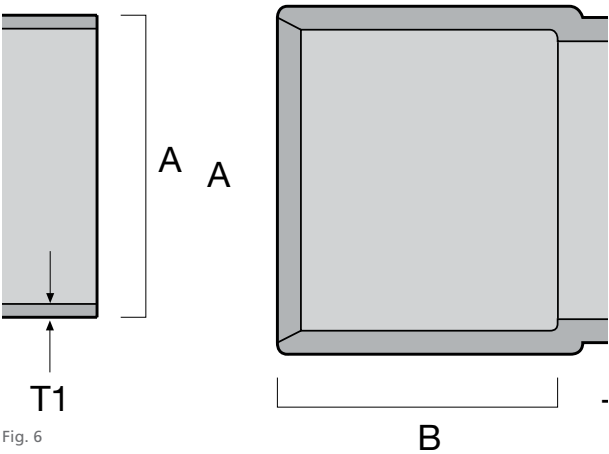


Fig. 6


500 Overflow

Terrain Waste System - 500 Overflow


| Size (mm) | L | T (min) | Colour | Code |
|------------------------------------|----|---------|--------|-----------|
| OVERFLOW PIPE - plain-ended | | | | |
| 19 | 4m | 1.1 | GBW | 500.75.40 |




| Size (mm) | L | Z | Colour | Code |
|---------------------------------------|----|---|--------|---------|
| STRAIGHT COUPLER DOUBLE SOCKET | | | | |
| 19 | 40 | 2 | W | 510.125 |




| Size (mm) | Angle° | Z1 | Z2 | Colour | Code |
|---|--------|----|----|--------|------------|
| BEND DOUBLE SOCKET - 91¼° and 135° as standard | | | | | |
| 19 | 91¼ | 12 | 12 | W | 501.75.91 |
| 19 | 135 | 6 | 6 | W | 501.75.135 |




| Size (mm) | Angle° | Z1 | Z2 | Z3 | Colour | Code |
|----------------------------------|--------|----|----|----|--------|-----------|
| BRANCH - 91¼° as standard | | | | | | |
| 19 | 91¼ | 13 | 13 | 13 | W | 504.75.91 |



| Size (mm) | A | Z | Colour | Code |
|-----------------------|---|---|--------|--------|
| SOCKET REDUCER | | | | |
| 19/32 | 5 | 5 | W | 524.75 |




| Size (mm) | A | Colour | Code |
|-----------------------------------|----|--------|--------|
| PIPE FIXING CLIP (PLASTIC) | | | |
| 19/32 | 20 | W | 540.75 |





500 Overflow

Terrain Waste System - 500 Overflow




| Size (mm) | A | L | Colour | Code |
|---|----|----|--------|---------------|
| STRAIGHT TANK CONNECTOR - to connect cistern/tank to overflow pipe | | | | |
| 19 | 48 | 69 | W | 511.75 |




| Size (mm) | Angle° | A | Z1 | Z2 | Colour | Code |
|--------------------------------|--------|----|----|----|--------|------------------|
| BENT TANK CONNECTOR 90° | | | | | | |
| 19 | 90 | 48 | 13 | 32 | W | 502.75.90 |

Solvent-weld socket to receive overflow pipe. Threaded socket to receive 3/4" BSP male threaded pipe end.




| Size (mm) | A | L | Colour | Code |
|--|----|----|--------|---------------|
| BSP ADAPTOR SOLVENT-WELD SOCKET AND 3/4" BSP SOCKET - to connect PVC-u overflow pipe to threaded components | | | | |
| 19 | 14 | 39 | W | 512.75 |



| Size (mm) | A | L | Z1 | Colour | Code |
|--|----|----|----|--------|---------------|
| REVERSE NUT CONNECTOR - to connect PVC-u overflow pipe to threaded components | | | | | |
| 19 | 35 | 54 | 25 | W | 519.75 |

Threaded loose nut to receive 3/4" BSP male threaded pipe end.



| Size (mm) | L | Colour | Code |
|----------------|-----|--------|---------------|
| TUNDISH | | | |
| 19 | 117 | W | 590.75 |

Accessories /Ancillaries

Accessories /Ancillaries

| Size (mm) | Colour | Code |
|---|--------|------|
| WC PAN SEAL (SOIL) - replacement seal for pan outlet diameter 95¼ - 121mm. Material: EPDM | | |
| 110 | B | 9124 |

Note: Use with 495.45 / 492.45



| Size (mm) | For Fittings | Colour | Code |
|--|-----------------------------------|--------|--------|
| SPARE SEAL RINGS (SOIL) - suitable for soil system expansion sockets and soil pipe, use with 126 Adaptors to Cast Iron. Soil fittings as listed. Material: EPDM | | | |
| 110 | Push Fit Soil (P) range | B | 9116.4 |
| 160 | Push Fit Soil (P) range | B | 9116.6 |
| 82 | 109/111/111.S/126/132 | B | 9120 |
| 110 | 103/105/109/111/111.S/126/132/137 | B | 9119.B |



| Size (mm) | Colour | Code |
|--|--------|------|
| SPARE SEAL RINGS (SOIL) - allows soil fittings to accept metric copper pipe to BS 2871. Material: EPDM | | |
| 110 | Red | 9149 |

| Size (mm) | Colour | Code |
|---|--------|----------|
| SPARE SEAL RING (WASTE) - 200 Waste System Fittings to accept pipe manufactured to BS 5255 and BS 5254, acceptable for copper pipe to BS 659 and BS 2781 | | |
| 32 | B | 9132.125 |
| 40 | B | 9132.15 |
| 50 | B | 9132.2 |

Note: Use with 226.2




| Size (mm) | Colour | Code |
|---|--------|------|
| MANIFOLD SEALING INSERT - Material: EPDM | | |
| 40 | B | 9113 |

Note: Use with 119.4.115






| Size (mm) | Colour | Code |
|--|--------|------|
| MANIFOLD PLUG (SPARE) - Material: Polypropylene | | |
| 40 | G | 9114 |

Note: Use with 119.4.115



Accessories /Ancillaries

Accessories /Ancillaries

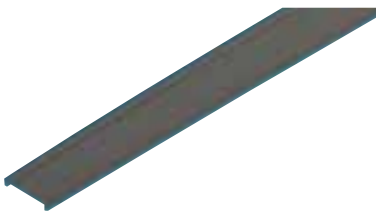

| Size (ml) | Colour | Code |
|--|---------|----------|
| TERRAIN ACCESSORIES - LIQUID WELD - for solvent jointing of PVC-u pipes and fittings cap, incorporates integral brush | | |
| 125 Tube | S/Steel | 9100.125 |
| 250 Tub | S/Steel | 9100.250 |
| 500 Tub | S/Steel | 9100.500 |

Material: Acetone. Screw top cans.

| Size (ml) | Colour | Code |
|---|--------|----------|
| TERRAIN ACCESSORIES - LUBRICANT - for lubricating seal rings on expansion fittings | | |
| 250 Tub (silicone) | | 9136.250 |
| 500 Tub (Soluble) | | 9136.500 |

Material: Silicone grease or Soluble lubricant.

| Size (ml) | Colour | Code |
|--|--------|----------|
| TERRAIN ACCESSORIES - CLEANING FLUID - for cleaning PVC-u pipe and fittings before applying Liquid Weld | | |
| | | 9101.125 |
| | | 9101.250 |

| Size (mm) | Weight (g) | Fire Rating | Colour | Code |
|---|------------|-------------|---------|--------|
| INTUMESCENT PIPE COLLAR - an intumescent sleeve is designed to prevent the spread of fire and smoke where PVC-u pipes penetrate a fire rated compartment wall or floor | | | | |
| 50 | 472 | 2 hrs | S/Steel | 1725.2 |
| 82 | 778 | 2 hrs | S/Steel | 1725.3 |
| 110 | 1016 | 2 hrs | S/Steel | 1725.4 |
| 160 | 2534 | 2 hrs | S/Steel | 1725.6 |

| Colour | Code |
|---|------|
| FIXING BOLTS - heavy duty expanding fixing bolts - pack of 4 | |
| | 1726 |

| Colour | Code |
|---|------|
| TOGGLE BOLT - to clamp 112 and 115 Boss Connectors while solvent-welding | |
| Self | 9115 |


| Size (mm) | Colour | Code |
|---|--------|--------|
| PACKING PIECE - for use with 140 and 142 Pipe Brackets and 191 Intermediate Support Brackets | | |
| 82 | G | 9104.3 |
| 110 | GB | 9104.4 |
| 160 | G | 9104.6 |

| Size (mm) | Colour | Code |
|---|--------|----------|
| HOLE MARKING TEMPLATE - to clamp 112 and 115 Boss Connectors while solvent-welding | | |
| 110 | Blue | 9105.500 |


Terrain Pleura System

Alternative Ventilation System

| Size (mm) | D | E | F | G | H | I | J | K | Colour | Code |
|--------------------------|----|----|------|----|----|----|----|----|--------|----------|
| TERRAIN PLEURA 50 | | | | | | | | | | |
| | 81 | 73 | DN40 | 67 | 32 | 30 | 40 | 51 | W | 9301.253 |




Pleura 50




Global Connector

| Size (mm) | A | B | C | D | E | F | G | H | I | Colour | Code |
|---------------------------|-----|-----|----|----|----|-----|----|----|-----|--------|---------|
| TERRAIN PLEURA 100 | | | | | | | | | | | |
| | 195 | 141 | 50 | 83 | 89 | 111 | 50 | 75 | 106 | W | 9301.34 |



Pleura 100



Connector

| Size (mm) | A | B | C | D | E | F | G | H | I | Colour | Code |
|---|-----|-----|-----|----|----|-----|----|----|-----|--------|--------|
| TERRAIN P.A.P.A. - Postitive Air Pressure Attenuator | | | | | | | | | | | |
| | 200 | 652 | 104 | 83 | 89 | 111 | 50 | 75 | 106 | W | 9300.4 |

NOTE: Please request design advice prior to using these products. P.A.P.A must be used in conjunction with Terrain Pleura valves.



P.A.P.A.



Connector

Refer to Terrain Pleura System brochure for further details

Terrain Fire Trap

Terrain Firetrap Sleeves

- Compatible with all Terrain systems.
- Comprehensively tested to BS EN 1366-3, BS 476P+20.
- Suitable for vertical and horizontal fire compartmentalisation.
- Quick and easy to install.
- For new installations and retrofit.

See Terrain Firetrap brochure for further details.

| Product Code | Di | Ø | Pipe size suitable for |
|--------------|-------|-------|------------------------|
| 1925.60 | 60mm | 110mm | 56mm 50mm PVC |
| 1925.89 | 89mm | 139mm | 82mm |
| 1925.114 | 114mm | 164mm | 110mm |
| 1925.169 | 169mm | 219mm | 160mm |



Terrain Firetrap Collars - for Terrain PVC Soil and Waste

- Seals against smoke, toxic gases, flames and heat
- Can be surface mounted or built in
- Intumescent material is totally unaffected by water, is robust, 'non-flaking' and difficult to tear
- Stainless steel outer casing

See Terrain Firetrap brochure for further details.

| Product Code | Ø | Fire Rating |
|--------------|-------|-------------|
| 1725.2 | 50mm | 2 Hour |
| 1725.3 | 82mm | 2 Hour |
| 1725.4 | 110mm | 2 Hour |
| 1725.6 | 160mm | 2 Hour |



General Principles

Good Site Practice

- Take all reasonable care when handling PVC-u particularly in very cold conditions when the impact strength of the material is reduced.
- Do not throw or drop pipes, or drag them along hard surfaces.
- In case of mechanical handling, use protective slings and padded supports. Metal chains and hooks should not make contact with the pipe.

On-site storage

- Stack pipe lengths
 - either on a flat base
 - or on level ground
 - or on 75mm x 75mm timber at 1 meter centres (Fig. 1)
- Provide side support with 75mm wide battens at 1m centres (Fig. 1).
- Maximum stack (normal conditions): seven layers high.
- Ideally, stacks should contain one diameter pipe size only. Where this is not possible, stack largest diameter pipes at base of stack. Small pipes may be nested inside larger pipes.
- If stored in the open for long periods or exposed to strong sunlight, cover the stack with opaque sheeting.
- Store fittings under cover. Do not remove from cartons or packaging until required.
- Store solvent cement and cleaning fluid in a cool place out of direct sunlight and away from any heat source.

Storage in hot climates

- Ultra-violet light can affect pipes and fittings: pipe colour may change and rubber seals may be degraded.
- Accordingly:
 - store all materials in well-ventilated, shady conditions
 - do NOT expose to direct sunlight
 - keep fittings in original packaging until required for use

- Maximum stack (hot conditions): six layers high.

Site safety

- The relevant regulations detailed in the Health & Safety at Work Act 1974, and Construction (Design & Management) Regulations 1995, must be adhered to on site.
- COSHH data sheets are available on request.

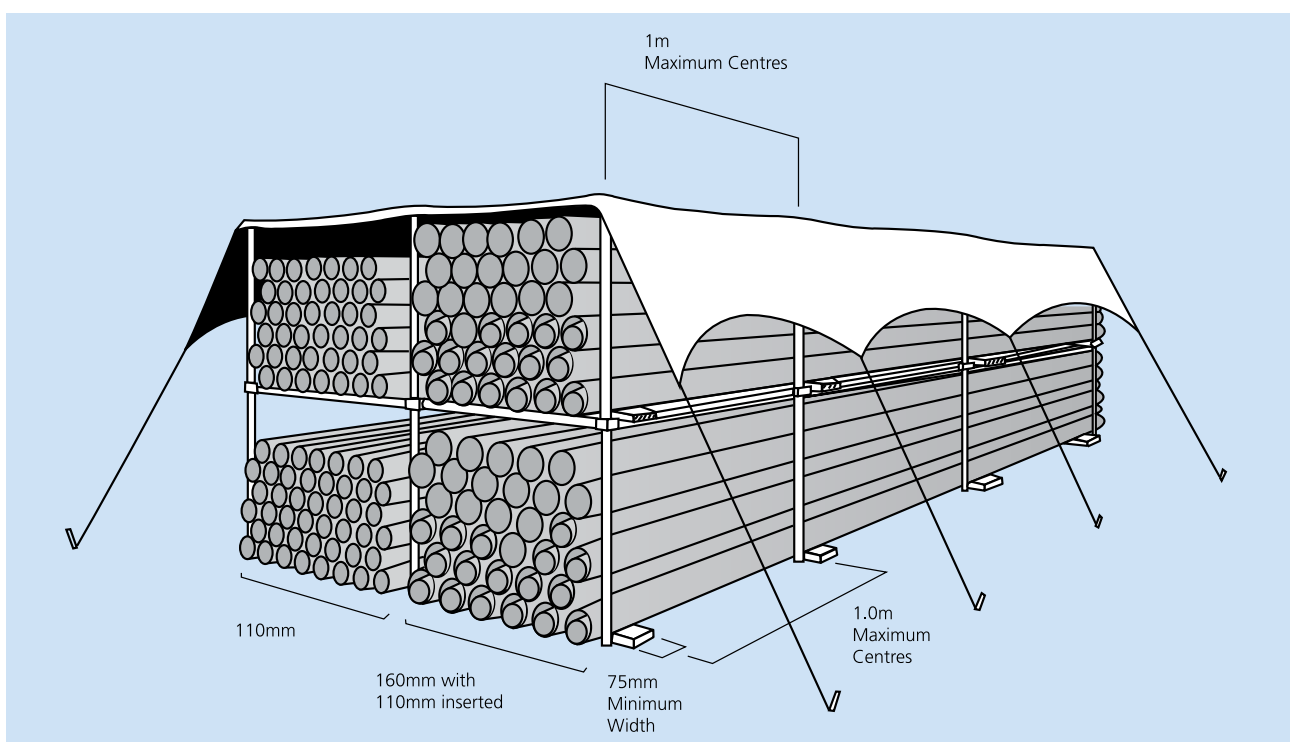


Fig. 1 Pipe stacking

Sitework Instructions

Sitework Instructions

Solvent cement jointing

This technique applies to 100, 200, 400 and 500 pipes when used with 100, 200 and 500 system fittings.

Step 1

Cut pipe square, deburr and clean mating surfaces with Terrain cleaning fluid 9101 (Fig.1).

Step 2

Coat mating surfaces with solvent cement using a clean brush, assemble joint immediately, removing any excess cement with a clean rag. Initial set 3-minutes. Note 24 hours is required for the joint to fully set before testing. (Fig. 2).

Brush supplied with tin is suitable only for sizes up to 50mm for larger sizes use at least 12mm brush. Directions for use of solvent cement are printed on the container label and must be followed closely.

Conversion of solvent weld socket to seal ring joint (using 109 adaptor)

Under normal use only fit 109 to upstream socket.

Step 1

Clean mating surfaces with Terrain cleaning fluid 9101 (Fig.3).

Step 2

Fit seal ring into 109 collar (Fig. 4)

Step 3

Carefully apply solvent cement to mating surfaces (Fig. 5)

Step 4

Assemble immediately applying firm even pressure until collar is in correct position (Fig. 6)




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5




Fig. 6

Estimating guide: Terrain cleaning fluid, liquid weld, lubricants

| Contents | | Pipe sizes & number of joints achievable* | | | | | |
|---------------------------------|-------|---|------|------|------|-------|-------|
| | | 32mm | 40mm | 50mm | 82mm | 110mm | 160mm |
| 9101 Cleaning Fluid | 125ml | 80 | 80 | 80 | 30 | 20 | 10 |
| | 250ml | 160 | 160 | 160 | 60 | 40 | 20 |
| 9100 Liquid Weld solvent cement | 30ml | 10 | 10 | 10 | 3 | 2 | 1 |
| | 125ml | 27 | 27 | 27 | 10 | 7 | 3 |
| | 250ml | 55 | 55 | 55 | 20 | 15 | 7 |
| 9136 Lubricant | 250gm | 400 | 300 | 250 | 200 | 150 | 100 |

* For guidance only: approximate number allowing for wastage.

Sitework Instructions

Seal ring jointing - 109

Step 1

File a 45° chamfer onto end of square cut pipe. Lubricate rubber seal with Terrain lubricant 9136 (Fig. 7).

Step 2

Enter pipe fully into socket, mark pipe as shown (Fig. 8).

Step 3

Withdraw pipe until the mark is 12mm away from socket. This means a 12mm gap exists between the end of the pipe and the socket register. This gap will allow the pipe to expand without distorting the pipework. Anchor the expansion joint with a holderbat or if not practical anchor a fitting within 1 metre of the joint (Fig 9 & 10).




Fig. 7




Fig. 8




Fig. 9




Fig. 10

Slip coupling - 111.S

Slip couplings are used for inserting additional fittings such as branch or for remedial work in existing soil pipework. To insert fitting:

Step 1

Assemble the fitting with a short length of pipe in the appropriate sockets. Cut out a section of the assembly, allowing for an expansion gap. Clean and chamfer pipe ends. Lubricate seals of the slip couplings.

Step 2

Slide the couplings completely over the spigot ends of the existing pipe.

Step 3

Insert and line up the new assembly, slide back the couplings to cover over the joints. Secure slip couplings with holderbats. (See Fig. 11).

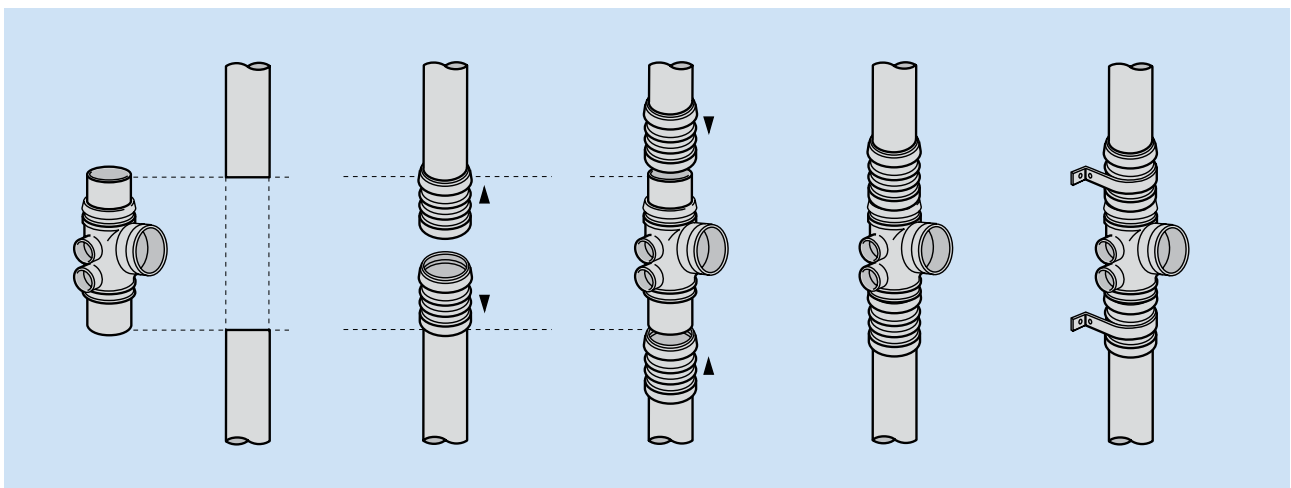


Fig. 11

Sitework Instructions

Sitework Instructions

Support and expansion

Plastic pipes expand and contract with changes in temperature. It is therefore essential that expansion joints be provided for the relief of such thermal movement. Any point where a pipe is made good, or fire stopped when passing through a floor or wall, must be treated as a fixed point when arranging the position of expansion joints, but should not be relied on to anchor the pipe unless the socket of a fitting is firmly concreted in. An expansion joint must be fitted between any two fixed points one metre or more apart.

(See Fig. 12) Vertical stacks are generally supported by holderbats anchoring expansion joints. Intermediate holderbats are necessary to steady the pipes. More frequent support is required in horizontal runs. Maximum distances between expansion joints and holderbats are given in the tables below.

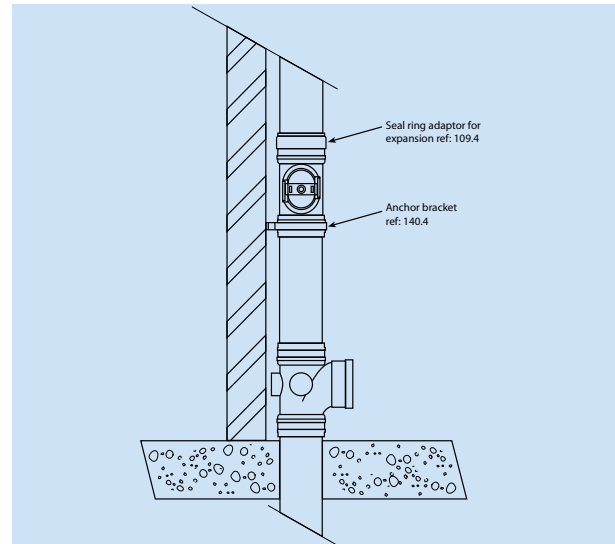


Fig. 12

| | Size ins | Size mm | Max Support | Max Support | Max Expansion |
|--------------|----------|---------|-----------------|-------------------|-------------------------------|
| | | | Vertical Metres | Horizontal Metres | Horizontal or Vertical Metres |
| Soil System | 3 | 82 | 2.0 | 0.9 | 4.0 |
| | 4 | 110 | 2.0 | 1.0 | 4.0 |
| | 6 | 160 | 2.0 | 1.0 | 4.0 |
| Waste System | 1¼ | 32 | 1.2 | 0.4 | 2.0 |
| | 1½ | 40 | 1.2 | 0.5 | 2.0 |
| | 2 | 50 | 1.2 | 0.9 | 2.0 |

NOTE: For further details, refer to separate brochure:
"A Guide to Thermal Movement"

Sitework Instructions

Steel holderbats, 140 and 141

These are designed to clamp fittings, creating a fixed point and to control thermal movement of pipework.

To use holderbats for fittings the strap must fit snugly around the fitting. locate tongue in front of square hole and position strap to suit curvature of fitting. Insert bolt in circular hole and tighten nut (Fig. 14).

For pipe, locate tongue in back square hole and bolt in circular hole and tighten nut. The pipe must be free to move through the holderbat to allow expansion and contraction (Fig. 15). (Alternatively a packing piece 9104 can be used for pipe with the tongue located in the front square hole, as for fittings (Fig. 16).

Plastic adjustable holderbat 143

This is designed to perform the same two functions as the steel holderbats, i.e. to support pipework and allow thermal movement. When clamped around the socket of a fitting it creates a fixed point (Fig. 17).

Adjustable holderbat 144

This is designed to perform the same functions as the other holderbats except it provides up to 28mm of adjustment on the 110mm system. When clamped around the socket of a fitting it creates a fixed point. When used to support pipe it is necessary to locate strap onto inside of back plate (Fig. 18).




Fig. 13




Fig. 14




Fig. 15




Fig. 16




Fig. 17




Fig. 17(1)




Fig. 17(2)




Fig. 18




Fig. 18(1)




Fig. 18(2)




Fig. 18(3)

Sitework Instructions

Sitework Instructions

Boss pipes 120 & 123

Only top socket can be converted to seal ring using seal ring adaptor 109.

Lugs permit holderbat anchorage.

120.4 - Accepts 200.125 and 200.15 pipe. (Fig. 22).

Sockets can be converted for expansion using a seal ring adaptor 109.

120.3.2 - Accepts 200.2 pipe and is supplied with blanking plugs that can have the centres removed to accept 200.15. (Fig. 23).

Must be used with engraved arrow pointing downstream to accommodate built in fall of $1\frac{1}{4}^{\circ}$.

123.4 - Must be used with branch boss adaptors 117 or 117.90. Waste pipe then push fits into fitting. (Fig.24)

Boss pipe 121

Only the top socket can be converted to seal ring using seal ring adaptor 109.

This boss pipe is for use with bends 207.15.150 allowing the waste pipe to approach at clip distance without the use of offsets. It can be used in both flat (Fig. 26) and corner (Fig.27) situations where pipes approach at 180° and 90° respectively. Solvent weld blanking plug into unused socket.

All bosses will accept $1\frac{1}{2}$ " waste pipe, solvent welded direct into the boss pipe.

For $1\frac{1}{4}$ " connection a socket reducer 224.15.125 is required. Then use 207.125.150.

NOTE: The letters A, B, and C will be found engraved above each socket on the fitting.




Fig. 22




Fig. 22

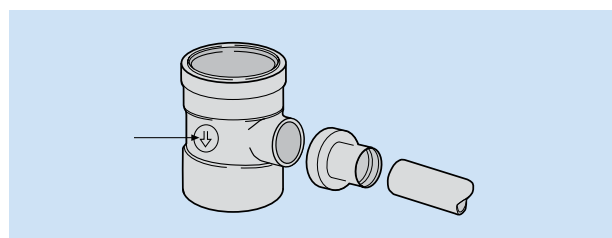


Fig. 24

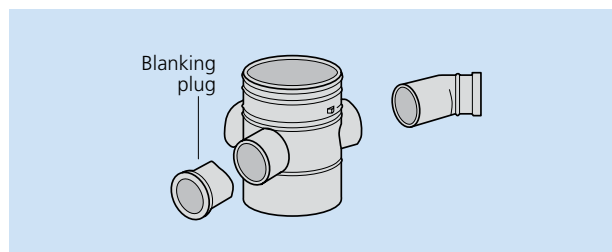


Fig. 25

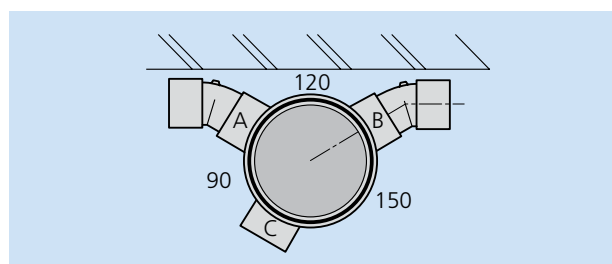


Fig. 26

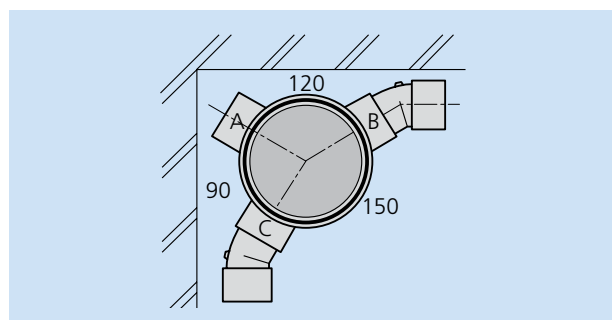


Fig. 27

System Connections

Connection via universal manifold

Applicable to:

119P Universal Soil Manifold (Fig. 79).

119 (solvent connections) and 119P (push-fit connections)

For 32mm and 40mm waste connection

- For up to four connections of BS EN 1566/ BS EN 1451-1 waste pipe at floor level (e.g. in bathroom) without need for adaptors.
- May be positioned neatly in corner of room for connection to internal soil stack.
- Supplied with four inlets and with removeable plugs.
- A sealing gasket is supplied for each inlet (Push fit only).
Install as follows:

- Mark selected position the manifold will occupy on the floor and cut out shape.
- Push-fit soil connections to top socket, spigot connection to bottom socket.
- Remove plug (if present) from selected waste inlet(s).
- Push-fit as necessary waste pipe into the manifold until the stop is reached.
- Check that any waste inlet which is not required has plug in place.

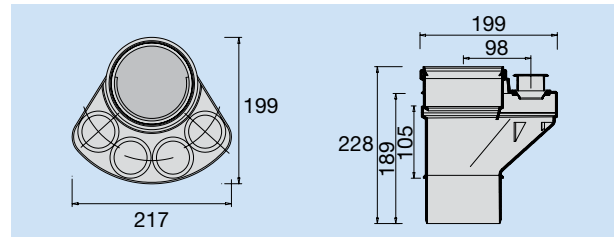


Fig. 79 419.4.15 Universal soil manifold




Fig. 80 Internal soil stack connection




Fig. 80 Internal soil stack connection

Sitework Instructions

Sitework Instructions

Variable boss branch

- Slacken locking ring (Fig. 28).
- Rotate lower unit so that waste connections are in required position (Fig. 29).
- Tighten locking ring (Fig. 30).
- If at ground floor use spigot version push into buried drain lipseal (Fig. 31).
- If at first floor and above use socket version and solvent weld to stack (Fig. 31).
- If only one waste connection is required solvent weld blanking plug into unused socket (Fig.32).
- If 1½" connections are required cut off socket plug at cut guide and use as a reducer (Fig.33).




Fig. 28




Fig. 29

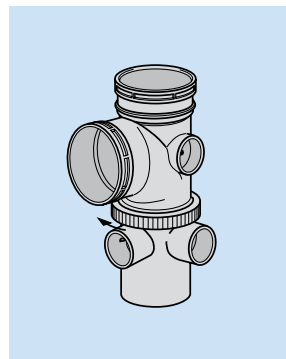


Fig. 30

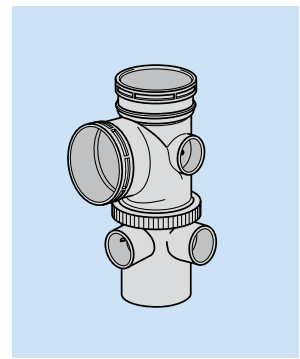


Fig. 31




Fig. 32




Fig. 33

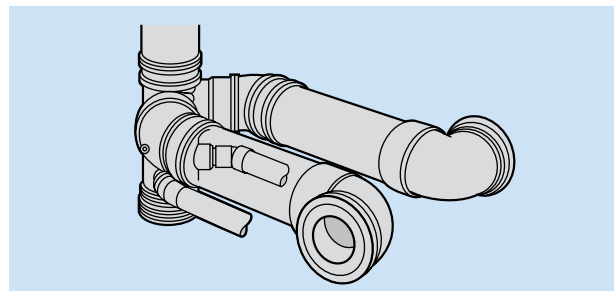


Fig. 34

Sitework Instructions

Boss adaptors

These accept pipe via a boss ring adaptor, 117 straight or bent.

- Cut out centre of boss. For correct size hole cutter refer to (Fig. 35).
- Remove swarf and clean mating surfaces with Terrain cleaner 9101 (Fig. 36).
- Apply solvent cement 9100 to all mating surfaces (Fig. 37).
- Position boss adaptor, twist to ensure contact then hold under pressure for a few moments (Fig. 38).
- Remove excess cement (Fig. 39).

Connecting waste pipes to soil stacks via two part boss 112, 113, 115

- Cut correct hole size and deburr (Fig. 40).
For correct size hole cutter refer to table below.
- Remove swarf and clean mating surfaces with Terrain cleaner 9101 (Fig. 41).
- Apply solvent cement 9100 to all mating surfaces (Fig. 42).
- Pass inner component outward through hole from the inside of the pipe and push the outer component firmly on to it ensuring that the key and keyway are lined up. Ensure engraving reads: top 91¼ for waste top 88¾ for vent (Fig. 43).
- Insert toggle bolt and screw up until boss is fully closed with flanges in contact with the pipe both inside and outside. (Fig. 44).
NOTE: Leave toggle bolt in position for approximately 15 minutes.




Fig. 35



Fig. 36




Fig. 37




Fig. 38



Fig. 39




Fig. 40



Fig. 41




Fig. 42




Fig. 43




Fig. 44

| Hole saw sizes | |
|------------------------|------------------------------|
| Aperture diameter (mm) | To suit fitting ref. |
| 33 | 281.43 |
| 48 | 112.125 - 135.3 - 112P.4.125 |
| 51 | 117* - 112P.4.15 |
| 57 | 112.15 - 115P.3 - 115P.4 |
| 60 | 122.125 - 112P.4.2 |
| 64 | 122.15 - 115 |
| 70 | 112.2 |
| 73 | 135.4 - 135.6 |
| 75 | 122.2 |

* All sizes.


All dimensions in mm unless otherwise stated

Sitework Instructions

Sitework Instructions

Self locking boss 122

- Cut correct hole size and deburr. For correct size hole cutter refer to table on page 59 (Fig. 45).
- Slacken nut on boss to full extent. Enter boss into hole keeping the keyway to the last piece to enter the hole. Tighten outer locking nut (Fig. 46).
- Once satisfied that the boss fits neatly into the pipe remove and clean all mating surfaces with Terrain cleaner 9101 (Fig. 47).
- Apply solvent cement 9100 to all mating surfaces (Fig. 48).
- Re-enter boss into the pipe. Screw up until hand tight and remove excess cement (Fig. 49).
- Template available ref: 9105.500.



9105.500




Fig. 45




Fig. 46




Fig. 47




Fig. 48



Fig. 49




Fig. 50

Access door 135 (4" & 5")

- Set out centre lines as described on inside of access door. Check aperture will be parallel with axis of pipe (Fig. 50).
- Drill two overlapping holes of correct size at 1 3/4" centres (Fig. 51).
- Remove sides of aperture using a medium file (Fig. 52).
- Slacken door to its fullest extent. Push the inner part of the door into the hole at a slight angle turning at the same time. When it is fully entered, turn it parallel to the axis of the pipe ensuring that the inner part locates into the hole. (Fig. 53).
- Ensure seal ring is lubricated prior to fitting. Tighten the screw whilst pulling the door outwards. Do not over tighten (Fig. 54)




Fig. 51




Fig. 52




Fig. 53




Fig. 54

Sitework Instructions

Weathering slates for pitched roofs 149

- Place 150 Vent Cowl on open end of soil stack (do NOT solvent-weld at this stage) (Fig. 55).
- Slide 149 Weathering Slate over stack (Fig. 56).
- Dress the base plate to fit the lower tiles. Lay the side and upper tiles over the base plate (Fig. 57).
- Remove the vent cowl. Solvent-weld 131 Weathering Apron to pipe above rubber cone to prevent water ingress. Place 150 Vent Cowl onto stack and solvent-weld into position (Fig. 58).

NOTE: On low pitched roofs, optimum weathering may be achieved by making a single weld to the lower edge of the base plate.

In areas subject to high winds, or in difficult tiling situations, use tingles to prevent lower edge lifting away from tiles.

If installing on roof with interlocking tiles, boards or additional battens may be required underneath the weathering slate. The stack must pass through only ONE course (if necessary, the soil stack should be offset beneath the roof).




Fig. 55




Fig. 56




Fig. 57




Fig. 58

Weathering slates for flat roof (three layers felt) 149

- Dress first layer of felt up to pipe (Fig. 59)
- Place 150 Vent Cowl on open end of soil stack (do NOT solvent-weld at this stage). Slide 149 Weathering Slate over stack. Push slate (and its rubber cone) down onto first layer of felt (Fig. 60)
- Coat the aluminium baseplate with bitumen. CAUTION: Keep hot material away from rubber cone. Place second layer of felt over baseplate up to the cone. Trim accordingly. Repeat for third layer of felt (Fig. 61).
- Solvent weld weathering apron 131 for asphalt to pipe above cone to prevent ingress of water. Replace vent cowl (Fig. 62).




Fig. 59




Fig. 60




Fig. 61




Fig. 48: Vent cowl 150
Weathering apron 131.3.200
or 131.4.200

System Connections

Sitework Instructions

Weathering to pitched roofs using purpose made slate e.g. lead

- Position purpose-made weathering slate on open end of soil stack (Fig. 63).
- Slide 131 Weathering Apron over stack and solvent-weld in position. Replace vent cowl and solvent-weld into position (Fig. 64).




Fig. 63




Fig. 64: Vent cowl 150
Weathering apron 131.3.200
or 131.4.200

Weathering to asphalt roofs using purpose made slate e.g. lead

- Position purpose-made weathering slate on open end of soil stack. Lay asphalt as normal, over baseplate and to upper rim of lead upstand around pipe. Feather this edge of the asphalt (Fig. 65).
- Slide 131 Weathering Apron over stack and solvent-weld in position. Place 150 Vent Cowl onto stack and solvent-weld into position (Fig. 66).

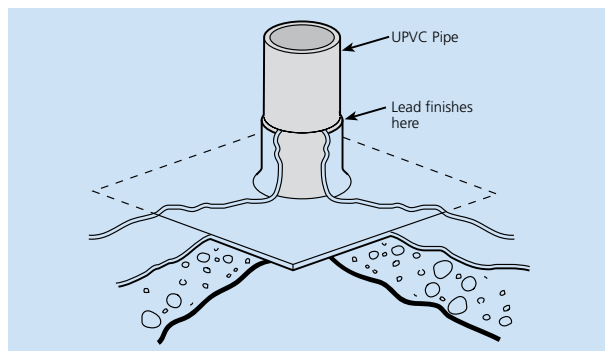


Fig. 65

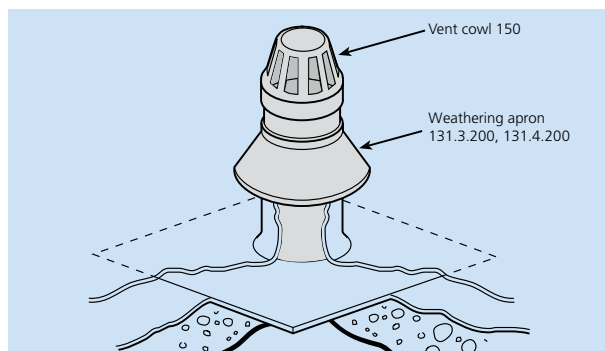


Fig. 66

System Planning

System connections to below ground drainage

Connecting to soil system (soil pipe to BS EN 1329)

- **110mm Soil Pipe to 110mm Underground Pipe**
110mm Underground Pipe may be connected directly to 110mm Soil Pipe (Fig. 25)
- A 45° external chamfer should be filed onto the end of square cut soil pipe. The soil pipe is then push-fit into the underground drain ring seal socket, using **9136 Lubricant**
- **82mm Soil Pipe to 110mm Underground Pipe (Fig. 26)**
Connection should be made using the **4DW3 Socket Reducer**. The socket reducer is inserted into the plain end of the underground pipe. The 82mm soil pipe is then pushed into top of reducer

Connecting to waste system (waste pipe to BS EN 1566)

Connection is made using the **124 Socket Reducer**. The socket reducer is pushed into the ring seal of the socket on the underground drain pipe. The waste pipe is solvent-welded into reducer. Additional reducers may be used as required.

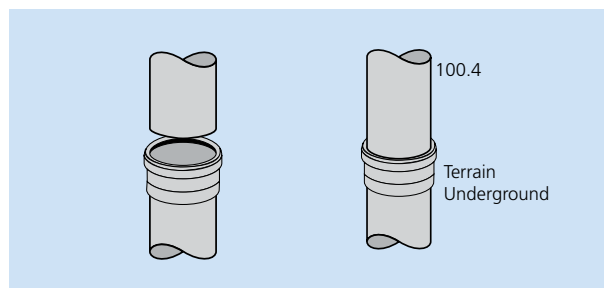


Fig. 25

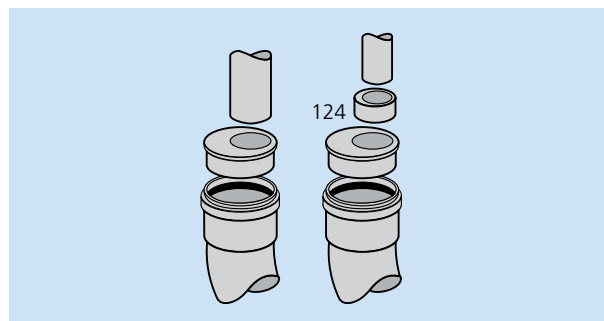


Fig. 26

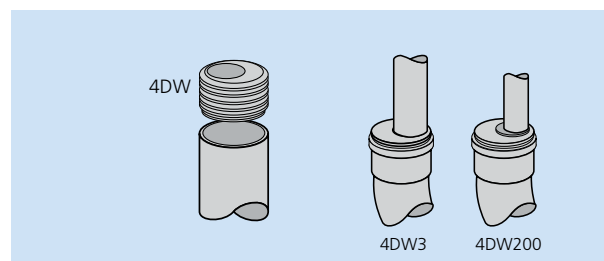


Fig. 27

Connecting to BS EN 5255/1566 waste pipe (Fig. 28) (also to copper waste pipe)

The centre of **130 Socket Plug** should be drilled out, ready for solvent-weld connection of the appropriate size **4DW Boss Adaptor**. Seal rings on 4DW and underground drain socket should be lubricated using **9136 Lubricant**. The socket plug is then inserted into the underground drain socket and **200 Waste Pipe** (or copper waste pipe) into 4DW adaptor.

| Waste | |
|------------|--------|
| 32mm round | |
| 40mm round | 4DW200 |
| 50mm round | |

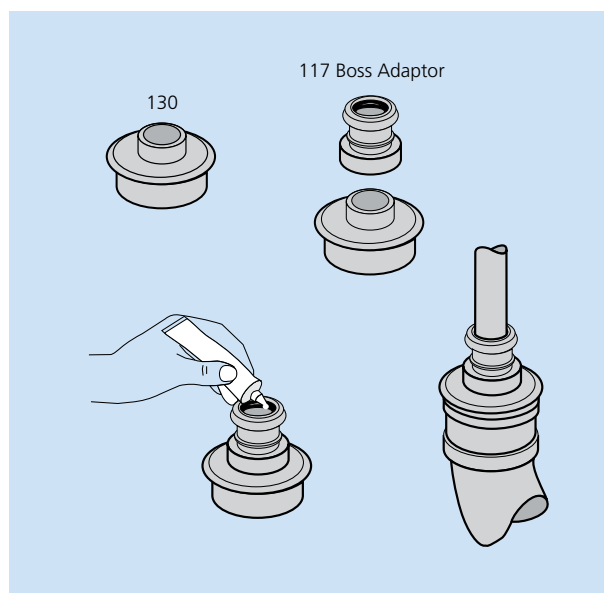


Fig. 28

System Connections

System Connections

Automatic air admittance valves 153.3.4 & 253

Installation

The spigot of the valve should be fitted vertically into a seal ringed socketed fitting using lubricant ref. 9136. The valve should normally be positioned in the roof space, but if fitted to a WC float or waste branch, must always be positioned above the spill-over level of appliances. The insulating cover should be used when there is a possibility of condensation forming within the valve body.



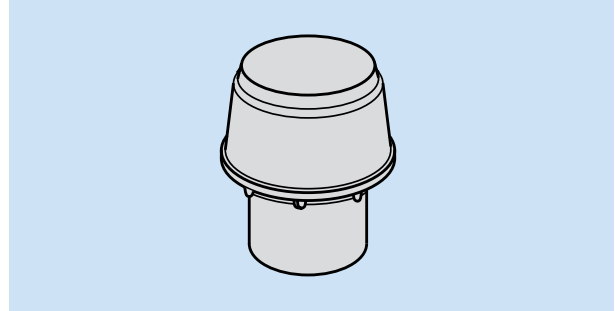


Fig. 67

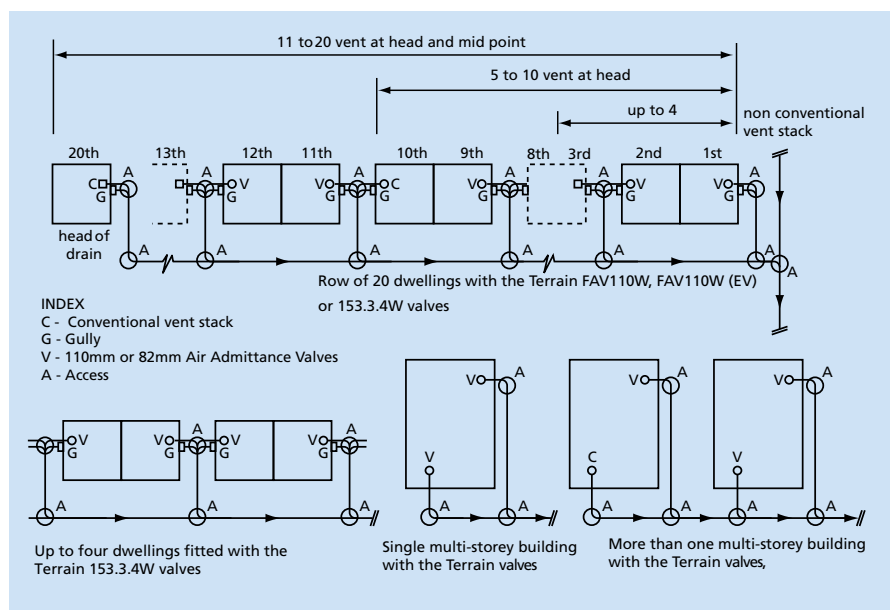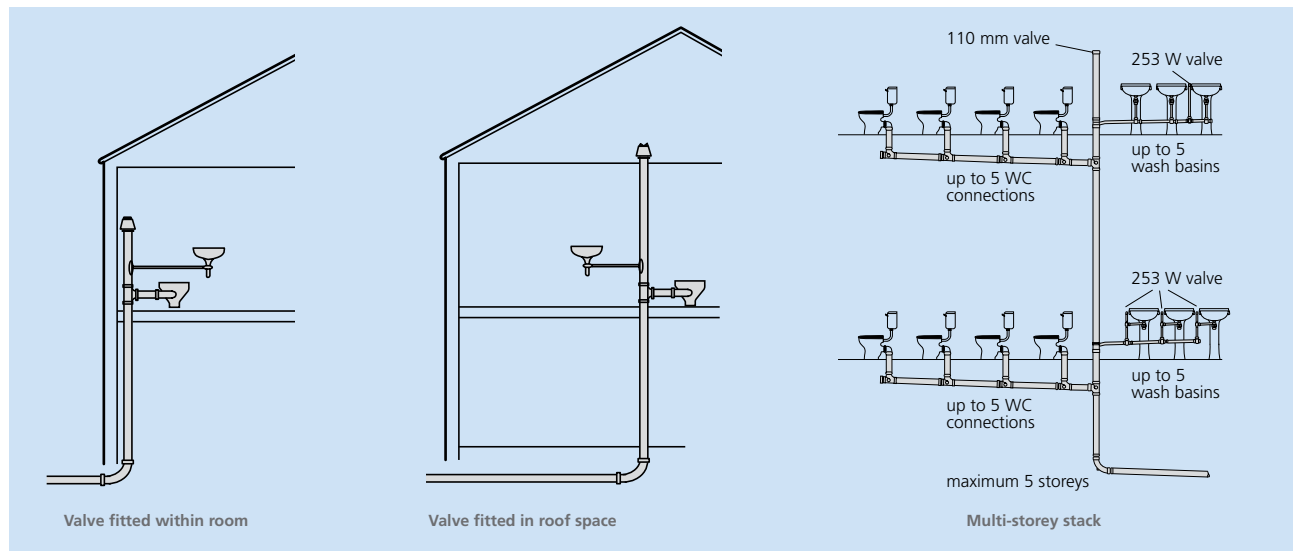

A typical row of dwellings connected to a common drain, with automatic air admittance valves fitted to soil and vent stacks.

NOTE: providing that the head of drain (house A) is open vented, i.e. with S.V.P. then up to 9 houses downstream may be fitted with automatic air admittance valves.

Houses B, C and D may have automatic air admittance valve but house A must have normal S.V.P. to vent head of drain

System Connections

Multiple connection of BS 5503 WC pans


Applicable to: 129 WC manifold connectors

Connections to float laid to 1° fall of float (17mm drop per 1 metre run).

- For minimum dimensions solvent-weld 50mm pipe length into branch socket to provide sleeve.

NOTE: To extend distance between WC connector and branch, a longer length of pipe may be used.


- Position and fix branch to wall.
- Fit finned rubber seal onto spigot of connector.
- Push spigot of connector into sleeved branch socket (DO NOT LUBRICATE).
- Lubricate rubber seal with 9136 Lubricant to accept WC spigot.
- Align connector socket so that it is square with WC spigot (finned seal allows up to 5° adjustment).

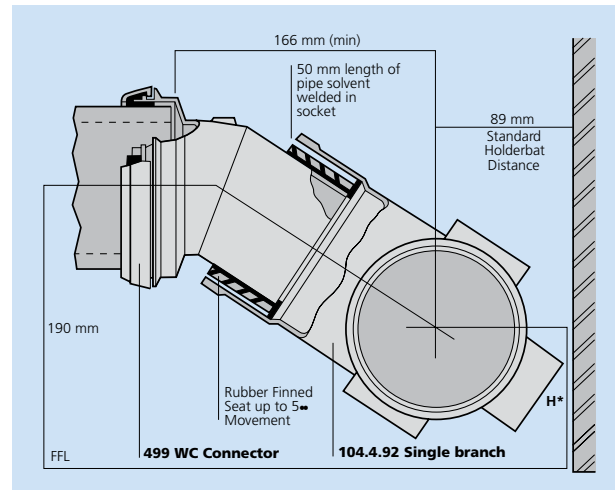

Manifold connector connected to 104 branch

Alternatively float construction can be achieved using 498.4.02.


For centres less or greater than 800mm contact Technical Department.

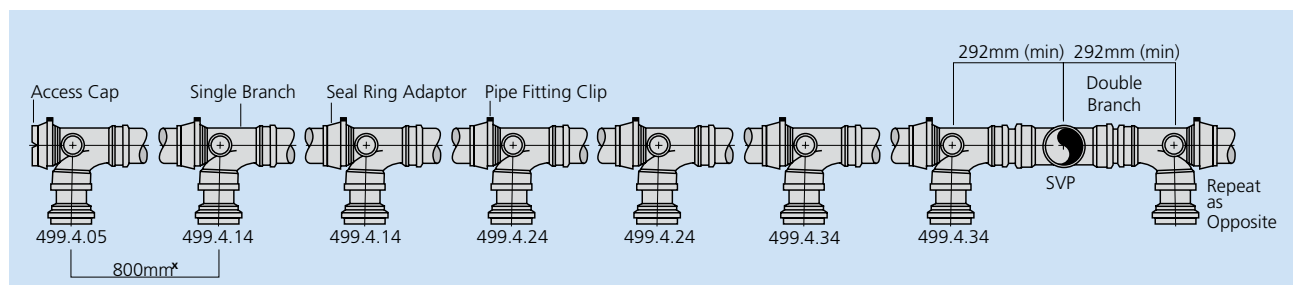

Multiple WC pan connections layout

| Distance from finished floor level (FFL) to centre of float | | |
|---|-------------|-------------|
| Connector Type | H* mm (min) | H* mm (max) |
| 499.4.05 | 166 | 176 |
| 499.4.14 | 142 | 162 |
| 499.4.24 | 114 | 132 |
| 499.4.34 | 80 | 100 |

* Variation achieved by flexing rubber finned seal joint.

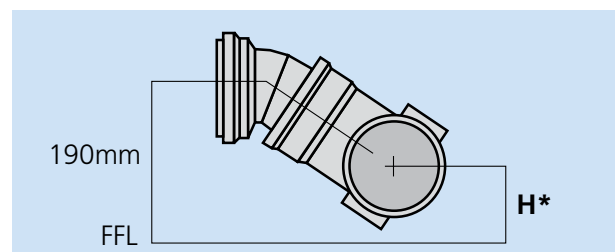

Distance from finished floor level (FFL) to centre of float

System Connections

System Connections

Connecting to other materials

Connecting to iron, clay or cement fibre spigot

Applicable to: 126 and 226 Adaptors.

For soil and waste connections, use with:

9120 Seal Ring for 82mm

9119 Seal Ring for 110mm

9119B Seal Ring for 110mm

- Place rubber seal ring over spigot to half depth of socket (Fig.68).
- Position adaptor centrally over joint:
 - **126.3.12 Adaptor (for 82mm soil pipe)**
 - **126.4.12 Adaptor (for 110mm soil pipe)**
 - **226.2 Adaptor (for waste pipe)**
- Heat gently with a gas torch/hot air gun, all round the socket starting at the base of the socket and working upwards (Fig. 69).
- When the socket has shrunk down to the adjoining spigot, and the captured seal ring has created a raised ridge, stop applying heat (Fig. 70).
- Leave to cool before moving or applying any pressure.




Fig. 68




Fig. 69




Fig. 70

Connecting to copper

- Clean pipe with 9101 Cleaning Fluid (Fig. 71).
- Replace black seal ring in PVC-u socket with appropriate red seal ring:
 - **Seal ring ref. 9149 for 108mm metric copper to BS 2871**
 - **Seal ring ref. 9145 for 4" imperial copper to BS 659**
- Lubricate seal ring with 9136 Lubricant and insert copper spigot as for standard PVC/PVC seal ring joint (see page 50).




Fig. 71

Connecting to lead

- Clean pipe with 9101 Cleaning Fluid (Fig. 72).
- Wipe or lead weld short length of copper tube onto end of lead pipe.
- Follow procedure as for copper.





Fig. 72

System Connections

Connecting to other materials

Connecting PVC to HDPE

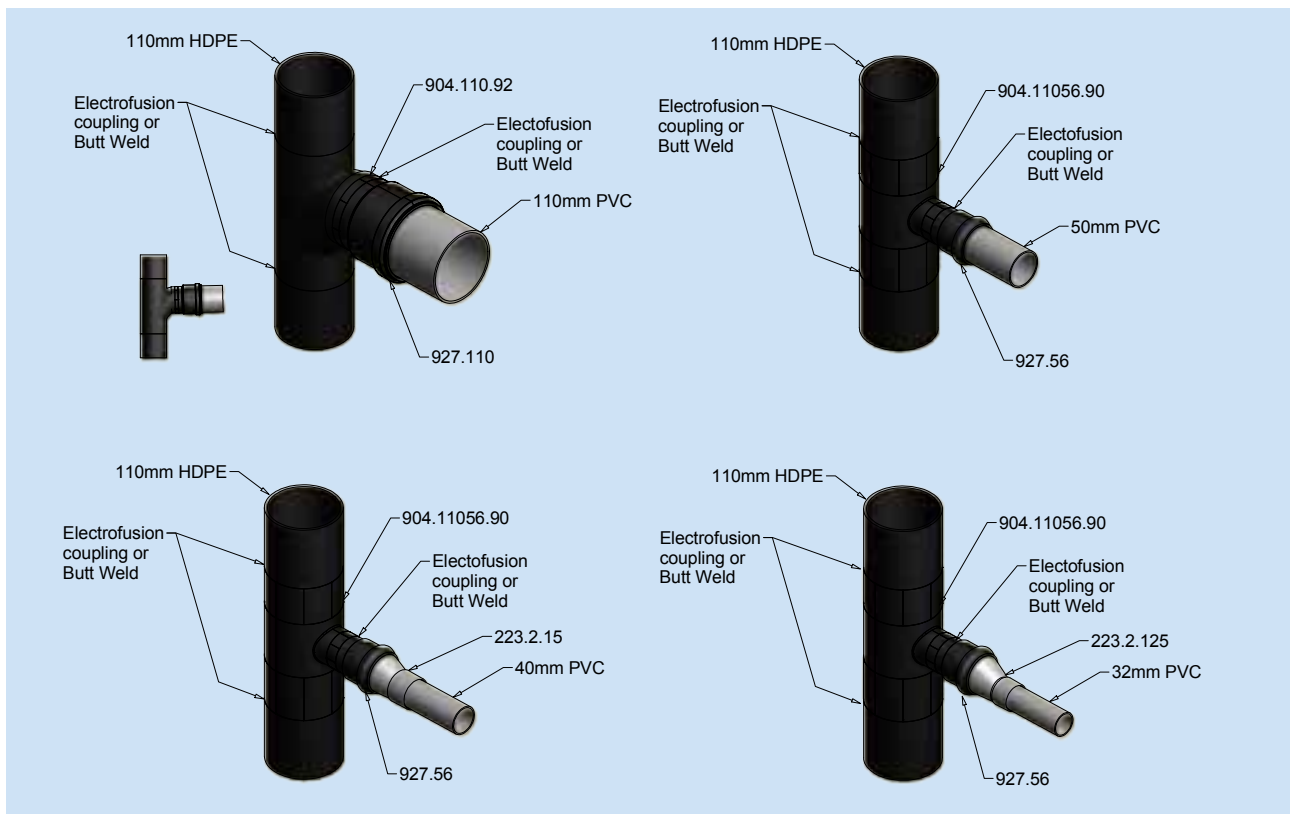

Trapped floor gullies

Installing trapped floor gullies

Applicable to:

279/281 Trapped Floor Gully, and 282 and 283 Floor Gully Inlets

- Check overall height of unit with inlet in position, and adjust to suit installation location. (Do NOT solvent weld inlet at this stage) (Fig. 74/75).
- Place gully into position.
- Solvent-weld waste pipe to outlet socket.
- Bring floor screed up to level with bottom of gully inlet.
- Allow screed to set, and remove gully inlet.
- Apply waterproof mastic to underside of square flange of gully inlet.
- Solvent cement gully inlet into position.
- Tile up to inlet, and grout using waterproof grout.




Fig. 74




Fig. 75




Fig. 76




Fig. 77

System Connections

System Connections

Connecting waste to soil pipework

Back to back WC connections

Back-to-back WC's must NEVER be connected using a double branch laid horizontally because cross flow WILL occur .

EITHER

- Run two separate horizontal floats using a corner branch.
- OR
- Stagger connections on a single float.

Using: 106.490.12, 106.490.22 Corner boss branches

- Use as Fig. 34 (page 55) with 135° bends. Can connect single or a range of WC's on each 110mm branch. Lower bosses can connect two 50mm waste pipes directly to sockets or 40 and 32mm pipes using appropriate reducers.

Using standard single branches and 499 WC manifold connectors

See page 61 for details on angles.

- Alternatively, use staggered layout, as shown in Fig. 78.
- Use standard boss connection methods.

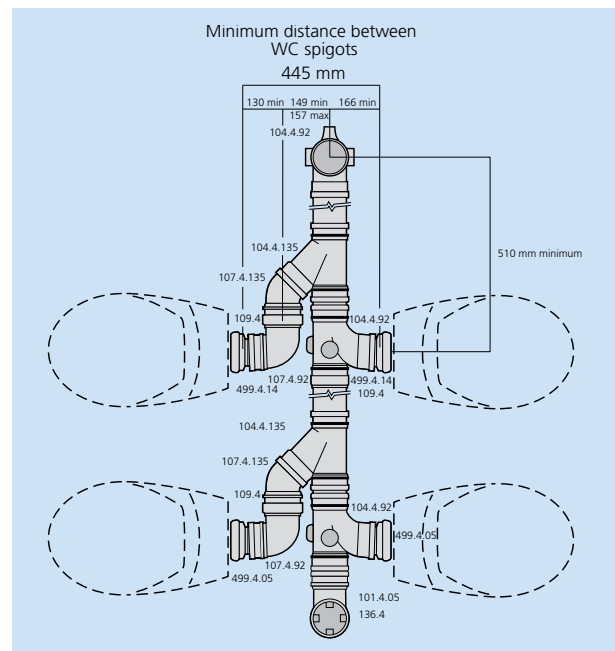


Fig. 78

Making offsets

Offsets on-site

Requirement: To offset soil pipe run

- Created on site with a length of 100 soil pipe and 101, 101P, 107 & 107P bends.
- Measure projection required.
- Determine length of pipe required, noting minimum offsets possible (Fig. 82)
- Square-cut pipe length and de-burr cut ends. For ring-seal joints, pipe ends must be chamfered.
- Solvent-weld or push-fit into standard bend or offset bend sockets

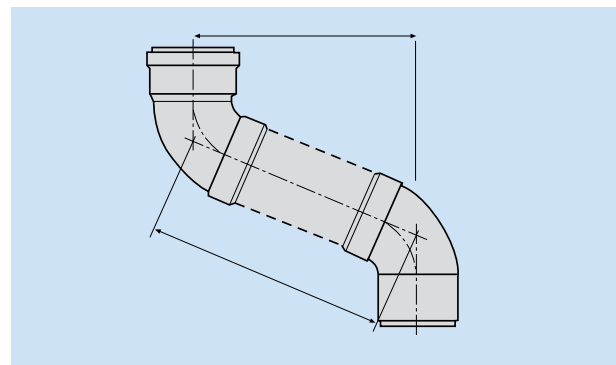


Fig. 82 Offset pipe

Balcony Outlets

Balcony Outlets

Installing screed finish balcony outlet

Applicable to: **2172 Balcony Outlet**

- Remove grid
- Position spacer on locating pegs
- Replace screws temporarily to prevent ingress of concrete
- Lay screed to the level of the top edge of the spacer
- Remove screws and replace grid
- Dress flashing over the rear upstand
- Tuck flashing into brickwork, joint and point

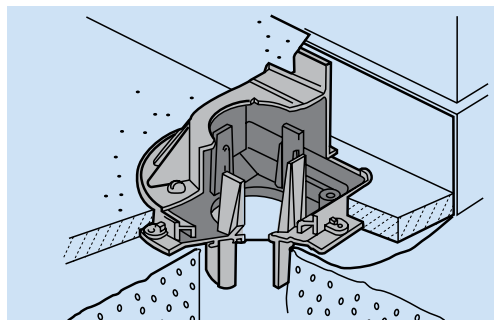


Fig.27

Installing asphalt finish balcony outlet

Applicable to: **2174 Balcony Outlet**

- Remove grid
- Temporarily replace screws to prevent ingress of asphalt
- Apply a suitable primer or bonding agent up to engraved line on outlet body
- Apply asphalt layer: dress over outer rim and down to engraved line on outlet body
- Remove screws
- Offer up grid and check correct angle of dressing
- Fit washer and grid, and secure with screws

NOTE: The polypropylene washer allows the grid to be easily removed for maintenance/clearing

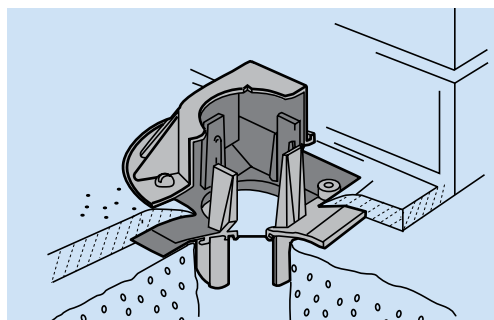


Fig.28

Connection to downpipes

Applicable to: **2172 and 2174 Balcony Outlets**

- For **68mm round downpipe (2100)**: use **2173.3.25 Socket Adaptor**
- For **62mm square downpipe (2200)**: use **2273.3.23 Socket Adaptor**
- For **82mm round downpipe (2100.3)**: connect direct to balcony outlet socket
- Solvent-weld all joints (see page 9)

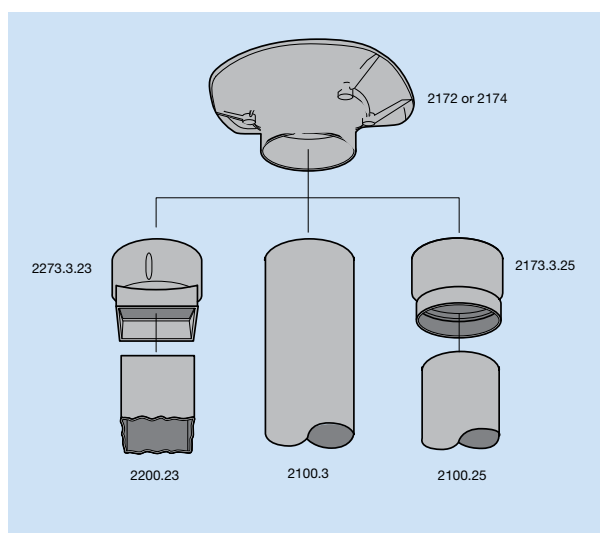


Fig.29

Small Roof Outlets

Small Roof Outlets

Fixing small roof outlet to proprietary plastic finish

Applicable to: all 2180 and 2181 Roof Outlets

- Apply recommended adhesive to flange of outlet body
- Dress plastic material over flange to the edge of opening
- Secure the flat or domed grid with brass screw supplied, lightly clamping the roof finish material in position

Fixing small roof outlet to mineral felt finish

Applicable to: all 2180 and 2181 Roof Outlets

- Apply suitable bitumastic primer to flange of outlet body
- Apply liquid bitumen or activator to roof and prepared area of flange
- Lay first layer of felt to edge of flange
- Dress second and third layers over the flange to the edge of the opening
- Secure the flat or domed grid with the brass screw supplied, lightly clamping the edge of the second and third layers of felt

NOTE: 2180 and 2181 outlets are not suitable for use with hot asphalt

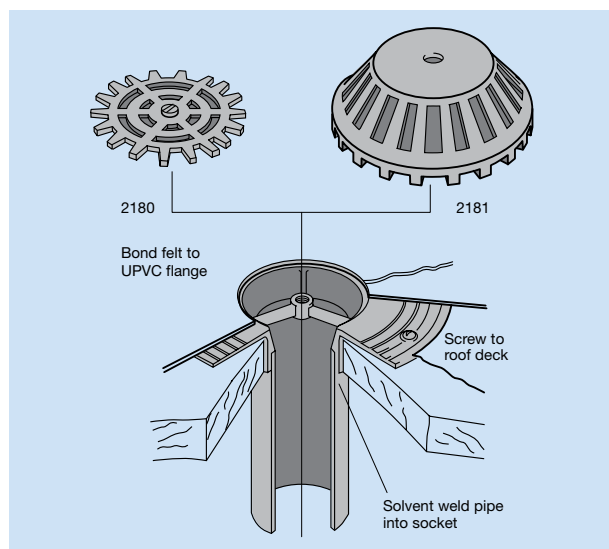


Fig.30

Connecting spigot/socket bends (small roof outlets)

Applicable to: all small diameter roof outlet

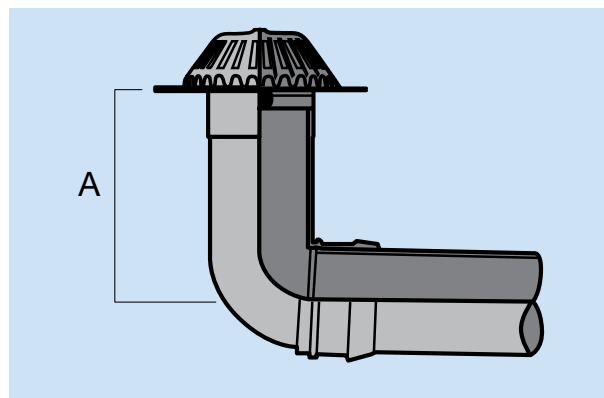


Fig.31 2181.2 Domed Outlet (small diameter)

| Fittings | Outlet size (mm) | Dimension A (mm) | |
|-------------------|------------------|------------------|-----|
| | | min | max |
| 2180.2 + 207.2.92 | 55 | 73 | 118 |
| 2181.2 + 207.2.92 | 55 | 73 | 118 |
| 2180.3 + 107.3.92 | 82 | 89 | 168 |
| 2181.3 + 107.3.92 | 82 | 89 | 168 |

Large Roof Outlets

Grid Options

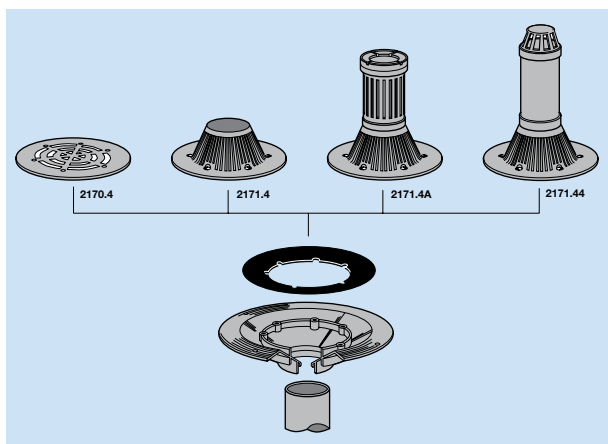


Fig.32

NOTE: 2170 flat roof outlet is not suitable for vehicular traffic

Fixing to asphalt finish

Applicable to: all 2170 and 2171 Roof Outlets

- Apply suitable bitumastic primer or bonding agent to bowl and flange of outlet body
- Dress a 19mm layer of asphalt over flange and bowl to level of upstand
- Offer up selected grid (see Fig.32 for alternative grids) check correct angle of dressing and engagement of screws
- Secure grid and washer in position with screws supplied

NOTE: The polypropylene washer allows the grid to be easily removed for maintenance/clearing

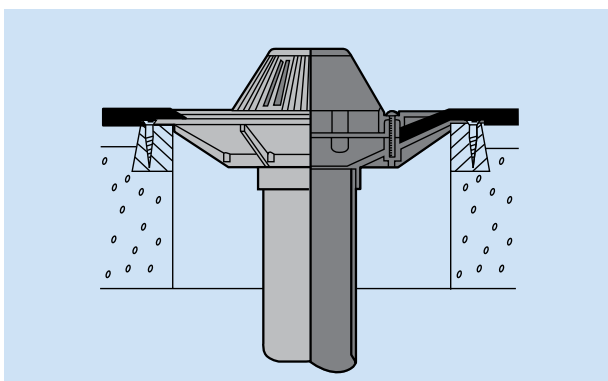


Fig.33 2171.4 Domed Outlet

Fixing to mineral felt finish

Applicable to: all 2170 and 2171 Roof Outlets

- Apply suitable bitumastic primer or bonding agent to bowl and flange of outlet body
- Apply liquid bitumen or activator to roof and prepared areas of outlet body
- Lay first layer of felt to edge of flange
- Lay second and third layers over roof outlet
- Dress down into bowl to the upstand
- Secure grid and washer in position with screws supplied

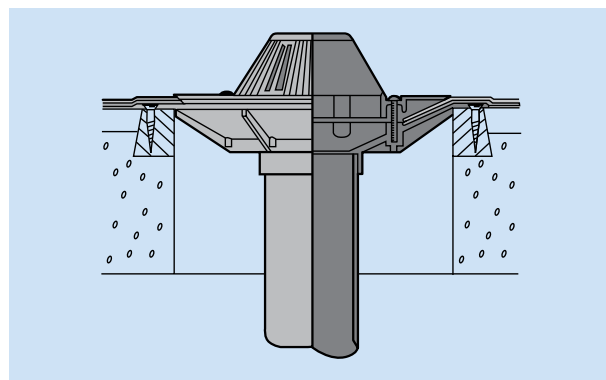


Fig.34 2171.4 Domed Outlet

Fixing to proprietary plastic finish

Applicable to: all 2170 and 2171 Roof Outlets

- Apply recommended adhesive to bowl and flange of outlet body
- Lay plastic material over roof outlet
- Dress over flange and bowl to the level of the upstand
- Secure grid and washer with screws supplied (see Fig.32 for alternative grids)

NOTE: The polypropylene washer allows the grid to be easily removed for maintenance/clearing

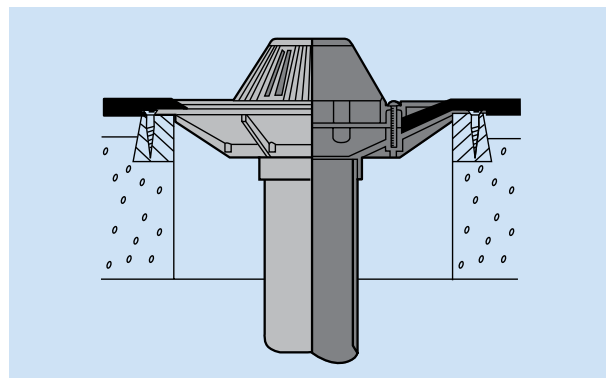



Fig.35 2171.4 Domed Outlet

Large Roof Outlets


Large Roof Outlets

Anchoring on thin or uneven roof structures

Applicable to: all 2170 and 2171 Roof Outlets

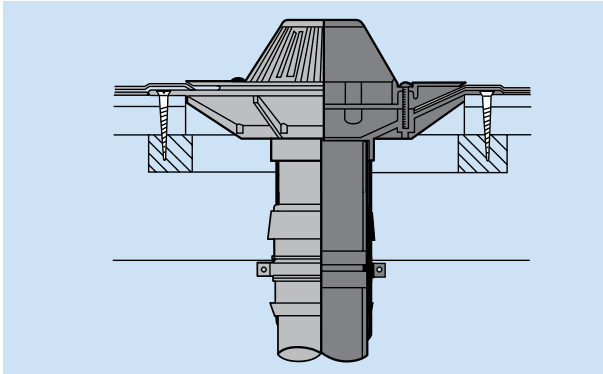

Three-layer felt on insulation material over profiled metal decking

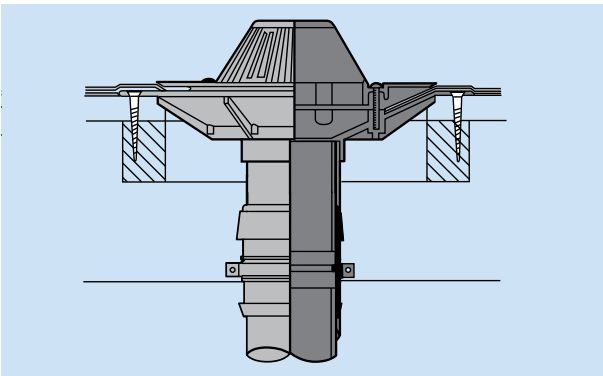

Three-layer felt on thin timber decking

Connecting spigot/socket bends (large roof outlets)

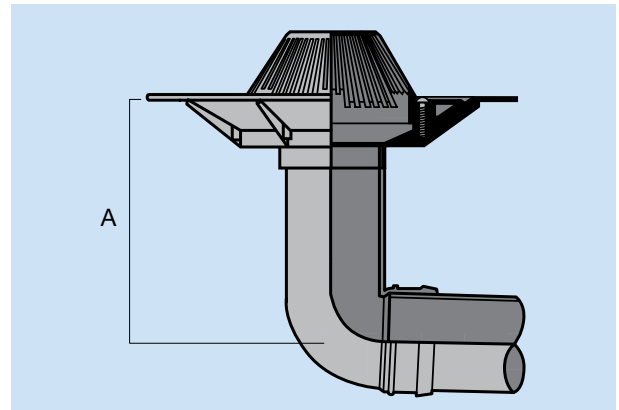


Fig.37 2171.4 Domed Outlet

Applicable to: all large roof outlets

| Fittings | Outlet size (mm) | Dimension A (mm) | |
|-------------------|------------------|------------------|-----|
| | | min | max |
| 2170.3 + 107.3.92 | 82 | 140 | 219 |
| 2171.3 + 107.3.92 | 82 | 140 | 219 |
| 2170.4 + 107.4.92 | 110 | 146 | 257 |
| 2171.4 + 107.4.92 | 110 | 146 | 257 |

General fixing details

Applicable to: balcony and roof outlets

- Solvent weld pipe-end, or spigot of bend, to roof outlet *(for jointing techniques, refer to sitework instructions)*
- Locate outlet body in roof structure and check that a suitable rigid fixing can be made
- Screw down outlet firmly to roof structure
- Remove grid
- Apply selected roof finish



Design Considerations

Design Considerations - Above Ground Drainage

Building regulations requirements

All sanitary pipework and drainage installations must satisfy the relevant requirements of Part H1 of the approved documents to the England, Wales and Northern Ireland Building Regulations 1990 and the Building Standards (Scotland) amendment regulations 1982.

Installations in accordance with BS EN 12056:2 Code of practice for sanitary pipework will also meet Building Regulations requirements.

Ventilation

The discharge stack must be ventilated in order to prevent pressure building up within the system and drawing the water seals in the traps. Separate ventilation of branch pipes is required only if the length and slope of the branch exceeds the following dimensions:

Maximum length:

(32mm) 1.7 metres

(40mm) 3 metres

(50mm) 4 metres

Slope: 18-90mm per metre

In such cases, the branch pipe should be ventilated by a branch ventilating pipe or an anti-siphon trap should be fitted. The Automatic Air Admittance Valve reduces the number of stack ventilating pipes required to penetrate the roof in multi-installations, without affecting performance of the drainage system.

Thermal expansion

Within a solvent-weld system it is important to make adequate allowance for thermal movement. This is most easily achieved by fitting an expansion ring seal joint between two fixed solvent-weld joints. The expansion gap should be created by pushing the spigot fully into the ring seal socket, and marking the position at the socket face. Then withdraw the spigot by 10mm. Check subsequently to ensure that the expansion gap is not lost during further installation work.

Branch connections

The distance between the centreline of the lowest branch connection to the discharge stack and the invert of the bend at the foot of the stack should be in accordance with the following:

- ≤3 storeys - 450mm min.
- ≤5 storeys - 750mm min.

- 5 storeys + - Ground floor connections should discharge direct to drain or into their own stack
- 20 storeys + - Ground floor and first floor connections should discharge into their own stack

A branch pipe should not discharge into a stack in a way which could cause crossflow into any other branch pipe.

Working temperatures

Terrain Soil and Waste systems may be used to convey liquids with a maximum temperature of 76°C when subjected to continuous flow. Intermittent discharges of up to 100°C may occur provided they are of less than 2 minutes duration.

Chemical discharges

Terrain Soil and Waste systems are generally resistant to most commonly used acids and those that may be discharged to the public sewer system. The rubber seals, however, are less resistant and it is advised that before any chemicals are conveyed through the systems, checks are made to establish their effects on the product. Refer to BS CP 312 Part 1 Code of Practice for Plastic Pipework for further information.

Access

Sufficient and suitable access must be provided to enable all pipework to be tested and maintained effectively. Access covers, plugs or caps should be installed in positions to facilitate use of testing equipment and removal of blockages.

Fire spread

In large commercial or housing developments, compartmentation may be required by the Building Regulations 1991 (Part B 3(2) Schedule 1). In such cases, any penetrations by sanitary pipework must be suitably fire stopped. Suitable measures include the containment of pipes from floor to ceiling in a fire resistant enclosure (with appropriate fire rating). In addition, the Terrain Firebrake Intumescent Sleeve has been designed to meet the highest fire stopping requirements.

Pipe support

Pipes must be adequately supported when installed vertically or horizontally (to falls).

Notes:

1. Gradients

Gradients should be between 1 and 5 degrees with a maximum distance of 3 metres. Distances over 3 metres are prone to blockage and should therefore be provided with access (Terrain Reference 204.15.135 & 237.15).

2. Venting

Maximum distance from stack for unvented system is 1.7 metres according to angle (see diagram A for details). Above 1.7 metres, venting is required, and if this is impractical then a suitable re-sealing trap (415.15) should be used.

3a. Air Admittance Valves

Air admittance valves (Terrain ref. 153.4.3) may be fitted as an alternative to an open vent, however an open vent must be allowed at the head of a drain. For further details see agreement Certificate No 06/4343.

3b. Terrain Pleura

Terrain Pleura may be fitted as an alternative ventilation system. The Pleura 50 protects the fixtures connected to the branch drain with the Pleura 100 and the PAPA together protecting the stack against positive and negative air pressures. An open vent must be allowed at the head of the drain. For further details see BBA Certificate 89/2139.

4. W.C. Connectors

W.C. connectors shown are to horizontal outlet pans (to BSEN997). For traditional P and S outlets a Terrain 495.4.5 or 492.4.5 connector should be used.

5. Stub Stacks

Stub stacks are used to connect one set of domestic appliances. A to be maximum of 2.0 metres and B (to crown of W.C. trap) to be maximum of 1.5 metres.

6. Connection Zones


Although four bosses have been provided on branches and access pipes certain connections are not allowed under BS5572. For permitted connections, see diagrams.

7. Distances

Distance must be a minimum of 450mm for single houses up to 3 storeys, or a minimum of 750mm up to 5 storeys, or one storey height for 5 storey buildings and over. Minimum radius of bend 200mm or alternative of 2 No. 45 degree bends.



8. Support and Expansion

Expansion should be allowed every 4.0 metres for 82mm, 110mm and 160mm and 2.0mtrs for 36mm, 43mm & 56mm respectively both vertically and horizontally.


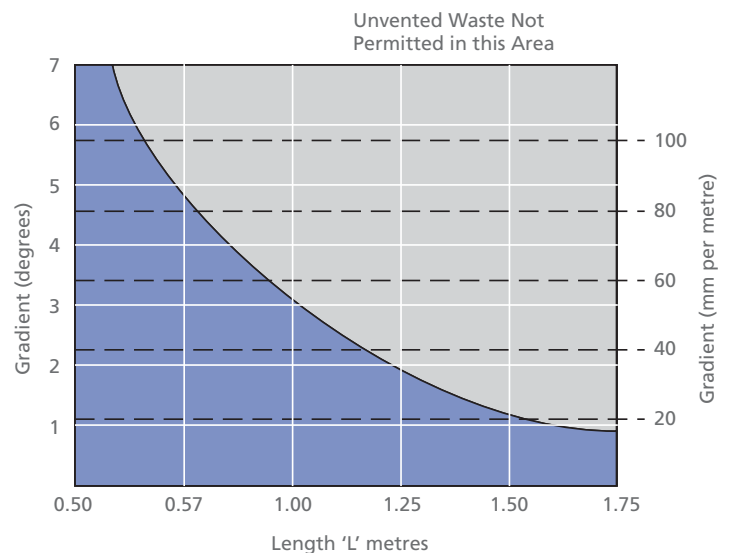


UK Design Principles


UK Principles of Stack Venting for Soil and Waste Drainage

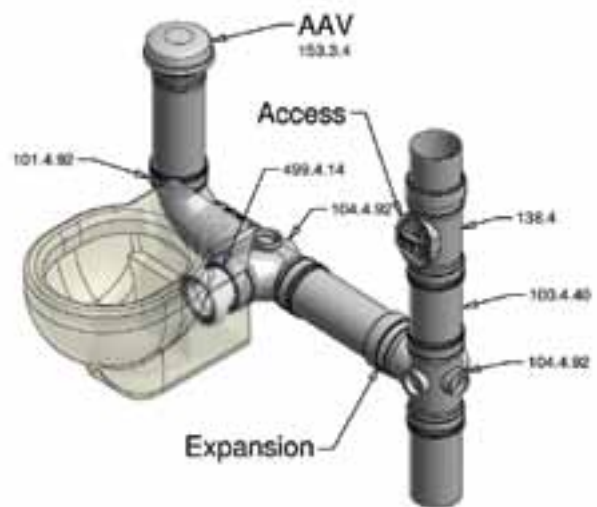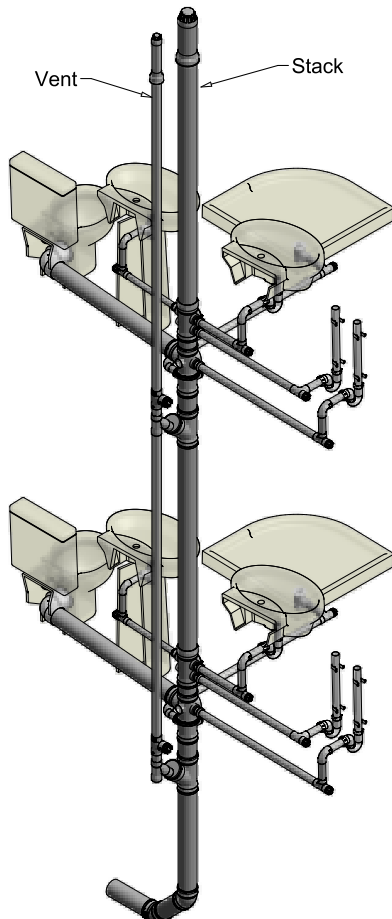

Traditional stack Vent

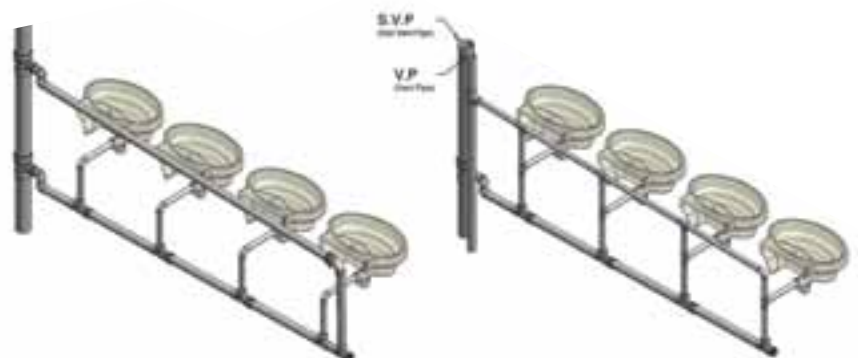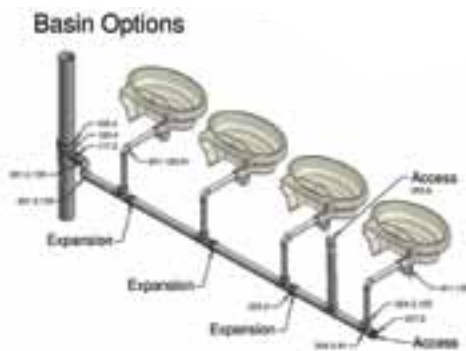


UK Principles of Stack Venting for Soil and Waste Drainage

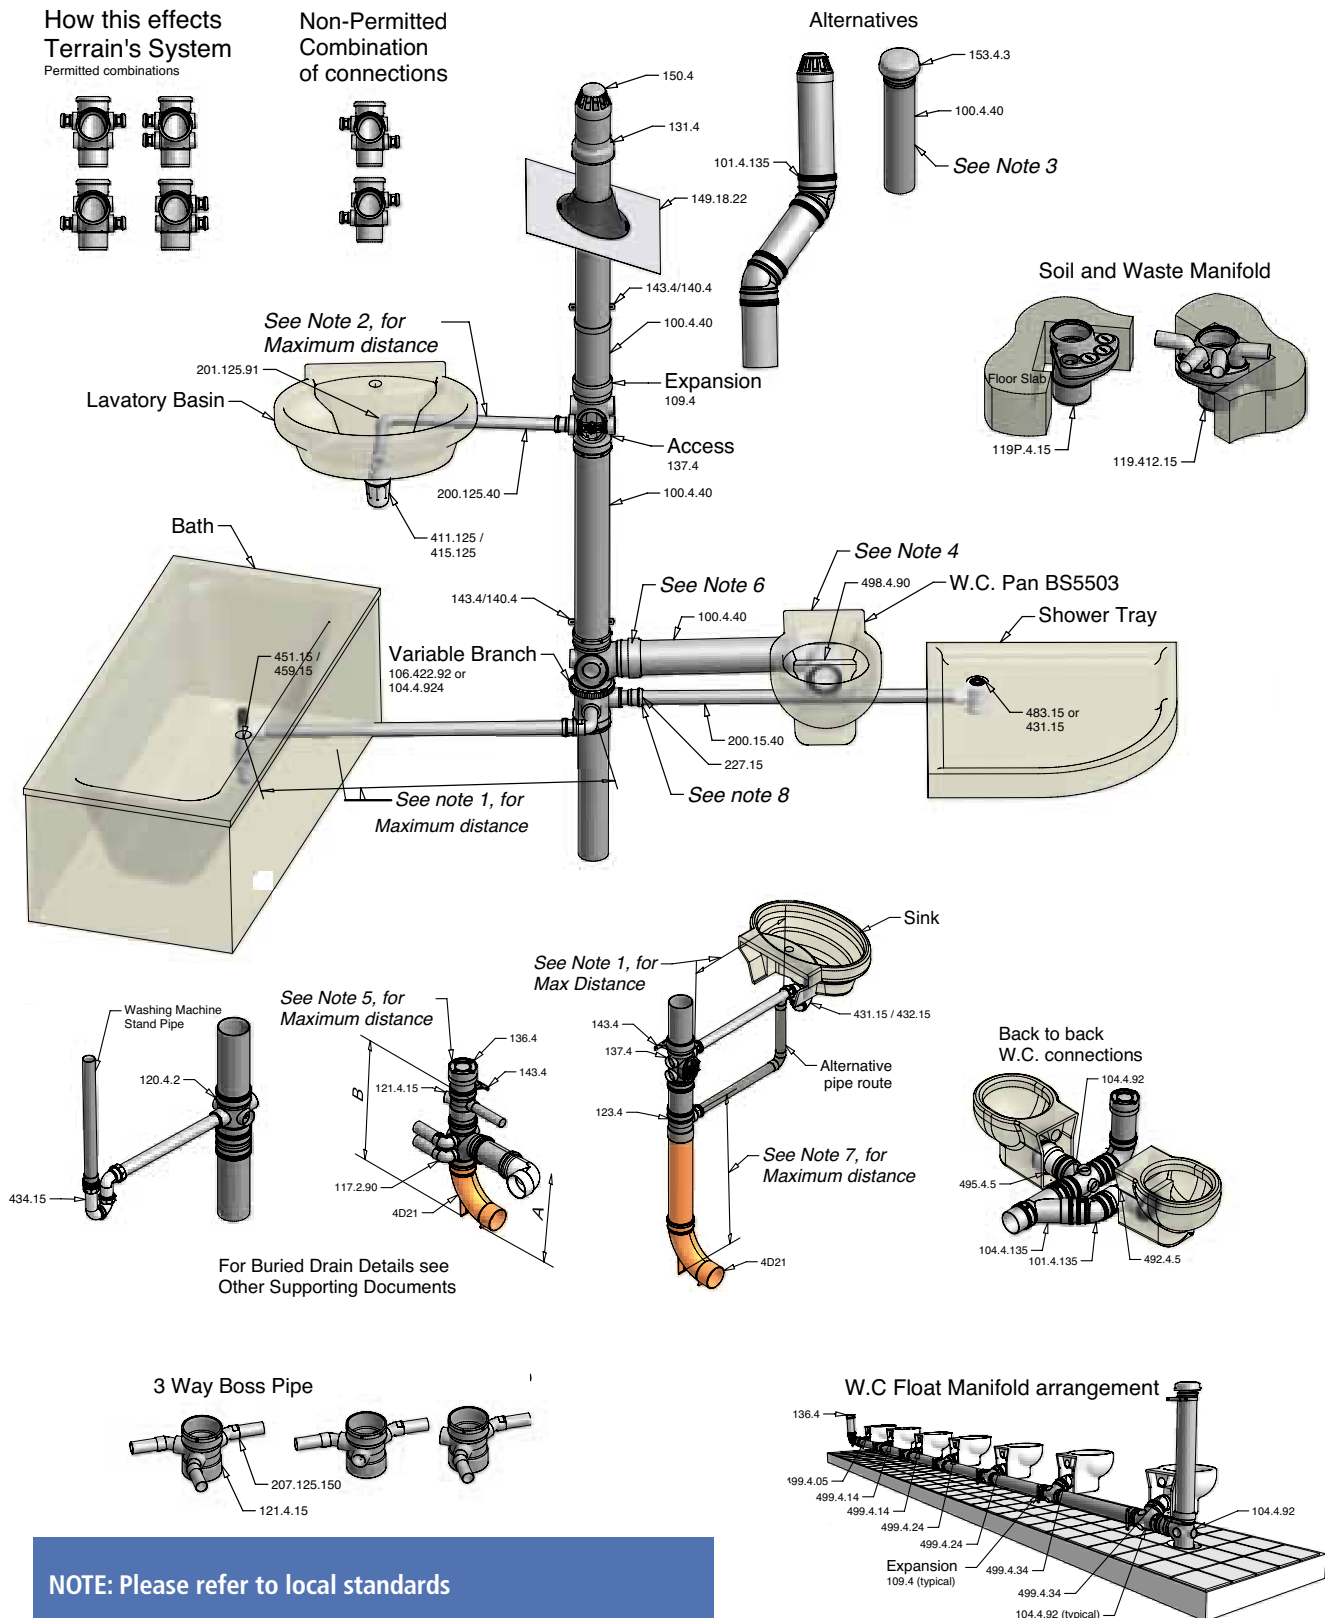


Middle East Design Principles

Middle East Design Principles

Single Stack

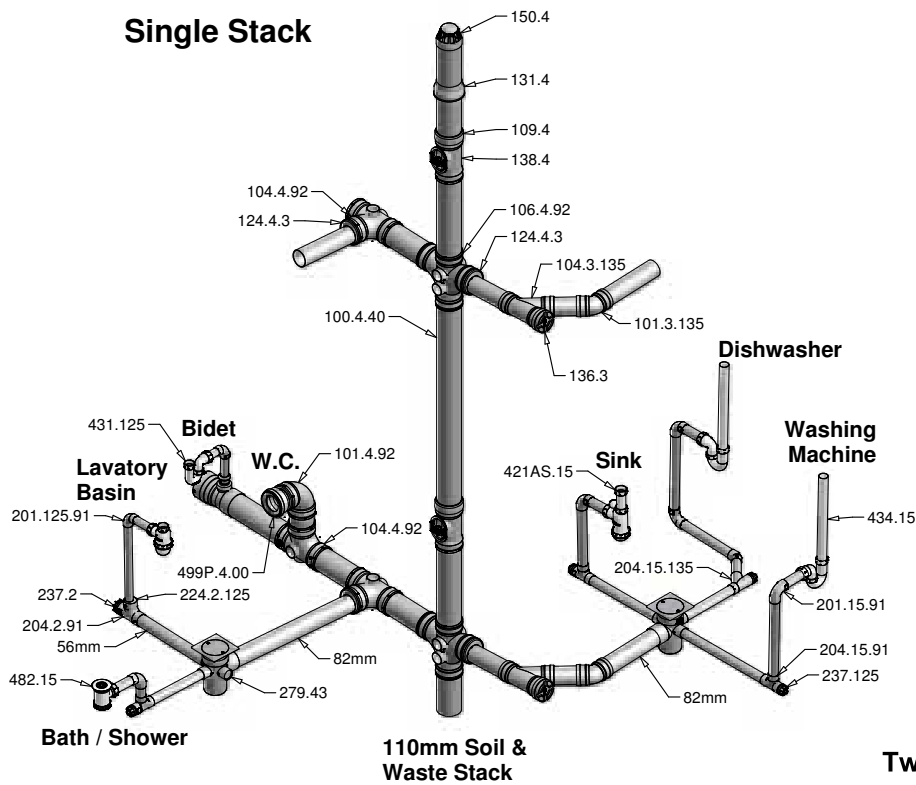


Two Pipe System

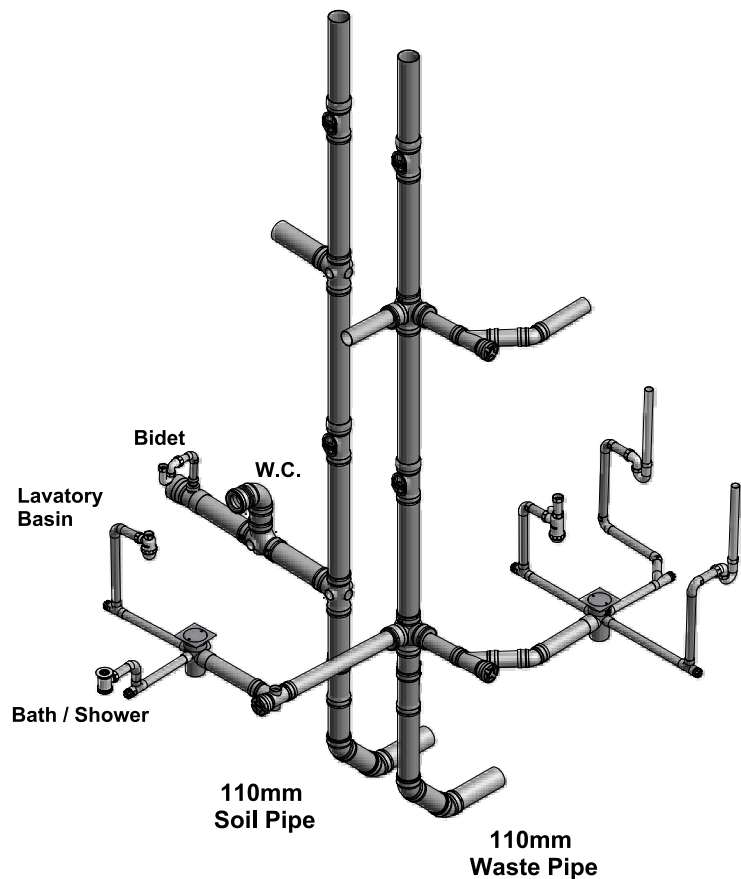


Middle East Design Principles

Middle East Design Principles

Three Pipe System

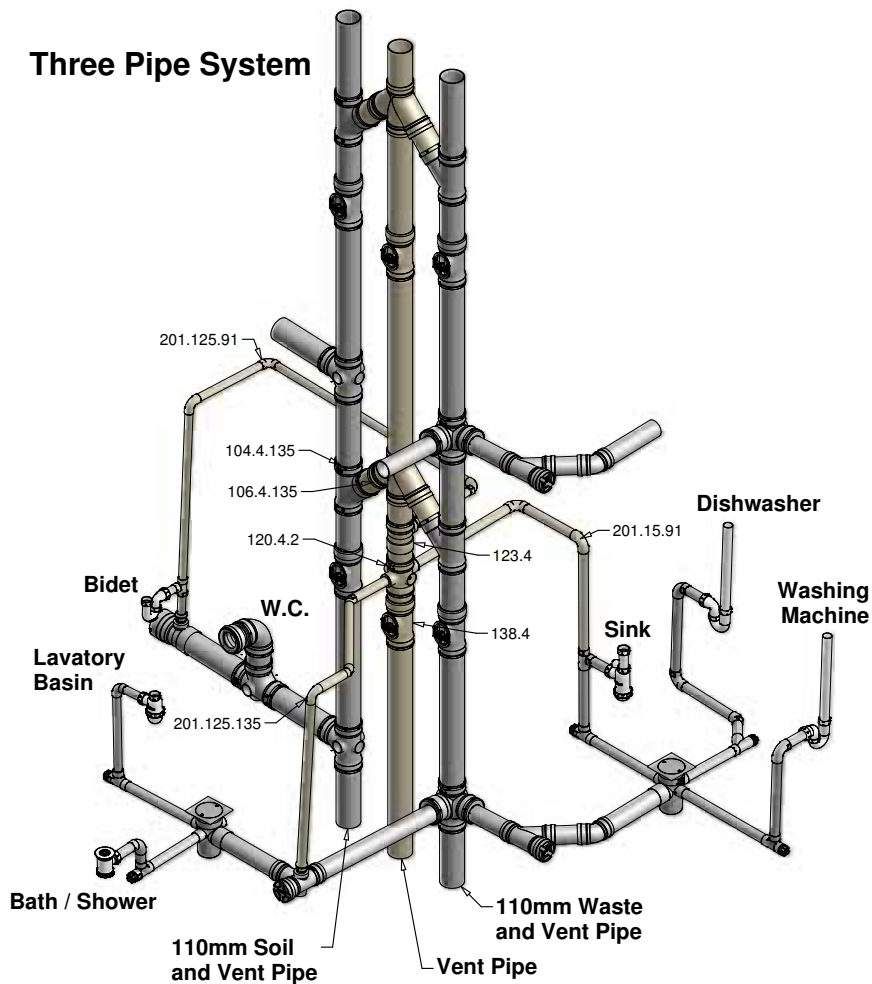

Drainage Velocity Breaker

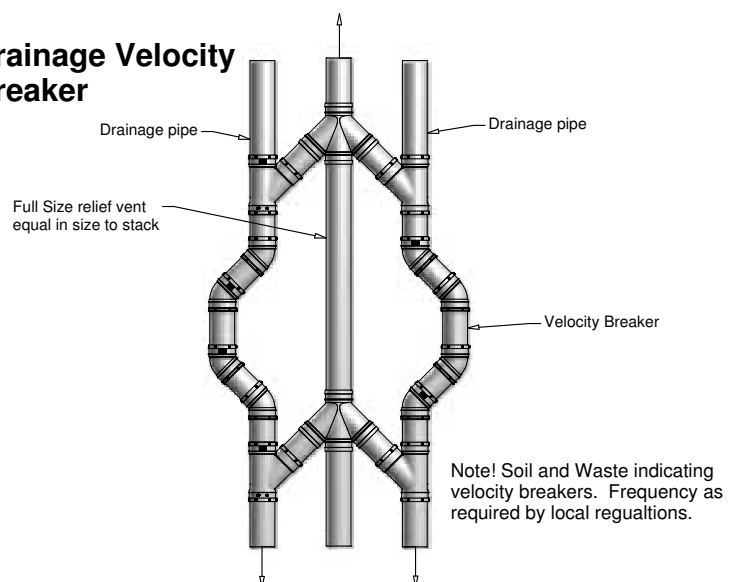

Design Data - Soil & Waste Drainage

Table A: Discharge units (DU) Values

| Appliance | System III DU l/s |
|----------------------------|-------------------|
| Wash basin, bidet | 0.3 |
| Shower without plug | 0.4 |
| Shower with plug | 1.3 |
| Single urinal with cistern | 0.4 |
| Urinal with flushing valve | - |
| Slab urinal | 0.2* |
| Bath | 1.3 |
| Kitchen sink | 1.3 |
| Dishwasher (household) | 0.2 |
| Washing machine up to 6kg | 0.6 |
| Washing machine up to 12Kg | 1.2 |
| WC with 4.0L cistern | ** |
| WC with 6.0L cistern | 1.2 to 1.7*** |
| WC with 7.5L cistern | 1.4 to 1.8*** |
| WC with 9.0L cistern | 1.6 to 2.0*** |
| Floor gully DN 50 | - |
| Floor gully DN 70 | - |
| Floor gully DN 100 | - |

* Per person.

** Not permitted.

*** Depending upon type (valid for WC's with siphon flush cistern only).

- Not used or no data.

Example:

10 storey building with

| | |
|---------|---------------|
| 2 WC | On each floor |
| 4 WHB | |
| 2 Baths | |
| 2 Sinks | |
| 2 W/MC | |

$$2 \times 1.5 = 3.0$$

$$4 \times 0.3 = 1.2$$

$$2 \times 1.3 = 2.6$$

$$2 \times 1.3 = 2.6$$

$$2 \times 0.6 = 1.2$$

$$10.6 \times 9 = 95.4 \text{ DU}$$

Domestic Building Use K = 0.7

$$0.7 \sqrt{95.4} = 6.84 \text{ l/s}$$

See Table C and D for capacities of pipes.

Table B: Typical frequency factors (K)

| Usage of appliances | K |
|--|-----|
| Intermittent use, e.g. in dwelling, guest-house, office | 0.5 |
| Frequent use, e.g. in hospital, school, restaurant, hotel | 0.7 |
| Congested use, e.g. in toilets and/or showers open to public | 1.0 |
| Special use, e.g. laboratory | 1.2 |

Frequency factor (K)

Typical frequency factors associated with different usage of appliances Table B.

Calculation of flowrate

Waste water flowrate (Q_{ww})

Q_{ww} is the expected flowrate of waste water in a part or in the whole drainage system where only domestic sanitary appliances are connected to the system

$$Q_{ww} = K \sqrt{\sum DU}$$

where:

Q_{ww} = Waste water flowrate (L/s)

K = Frequency factor

∑DU = Sum of discharge units.

NB: Under no circumstances should pipe of a larger diameter be connected to pipe of a smaller diameter in the direction of flow.

Table C: Stack with only Primary Vent

| Stack & Stack Vent | System I, II, III, IV Q _{max} (L/s) | |
|--------------------|---|---------------|
| DN | Square # entries | Swept entries |
| 60 | 0.5 | 0.7 |
| 70 | 1.5 | 2.0 |
| 80* | 2.0 | 2.6 |
| 90* | 2.7 | 3.5 |
| 100** | 4.0 | 5.2 |
| 125 | 5.8 | 7.6 |
| 150 | 9.5 | 12.4 |
| 200 | 16.0 | 21.0 |

* Minimum size where WC's are connected in system II.

** Minimum size where WC's are connected in system I, III, IV. # Equal branch junctions that are more than 45°, or has a centre line radius less than the internal pipe diameter.

Table D: Stack with Secondary Venting

| Stack & Stack Vent | Secondary Vent | System I, II, III, IV Q _{max} (L/s) | |
|--------------------|----------------|---|---------------|
| DN | DN | Square # entries | Swept entries |
| 60 | 50 | 0.7 | 0.9 |
| 70 | 50 | 2.0 | 2.6 |
| 80* | 50 | 2.6 | 3.4 |
| 90* | 50 | 3.5 | 4.6 |
| 100** | 50 | 5.6 | 7.3 |
| 125 | 70 | 7.6 | 10.0 |
| 150 | 80 | 12.4 | 18.3 |
| 200 | 100 | 21.0 | 27.3 |

* Minimum size where WC's are connected in system II.

** Minimum size where WC's are connected in system I, III, IV. # Equal branch junctions that are more than 45°, or has a centre line radius less than the internal pipe diameter.

For branch pipe sizing based on System III the following sizing charts should be used.

| Appliance | Dia. DN | Min. trap seal depth (mm) | Max. length (L) of pipe from trap outlet to stack (m) | Pipe gradient | Max. no. of bends | Max. drop (H) (m) |
|--|---------|---------------------------|---|-------------------|------------------------|-------------------|
| Limitations for unventilated branch discharge pipes, system III | | | | | | |
| Washbasin, bidet (30mm diameter trap) | 30 | 75 | 1.7 | 2.2 ¹⁾ | 0 | 0 |
| Washbasin, bidet (30mm diameter trap) | 30 | 75 | 1.1 | 4.4 ¹⁾ | 0 | 0 |
| Washbasin, bidet (30mm diameter trap) | 30 | 75 | 0.7 | 8.7 ¹⁾ | 0 | 0 |
| Washbasin, bidet (30mm diameter trap) | 40 | 75 | 3.0 | 1.8 to 4.4 | 2 | 0 |
| Shower, bath | 40 | 50 | No Limit ²⁾ | 1.8 to 9.0 | No Limit | 1.5 |
| Bowl urinal | 40 | 75 | 3.0 ³⁾ | 1.8 to 9.0 | No Limit ⁴⁾ | 1.5 |
| Trough urinal | 50 | 75 | 3.0 ³⁾ | 1.8 to 9.0 | No Limit ⁴⁾ | 1.5 |
| Slab urinal ³⁾ | 60 | 50 | 3.0 ³⁾ | 1.8 to 9.0 | No Limit ⁴⁾ | 1.5 |
| Kitchen sink (40mm diameter trap) | 40 | 75 | No Limit ²⁾ | 1.8 to 9.0 | No Limit | 1.5 |
| Household dishwasher or washing machine | 40 | 75 | 3.0 | 1.8 to 4.4 | No Limit | 1.5 |
| WC with outlet up to 80mm ⁶⁾ | 75 | 50 | No Limit | 1.8 min | No Limit ⁴⁾ | 1.5 |
| WC with outlet greater than 80mm ⁶⁾ | 100 | 50 | No Limit | 1.8 min | No Limit ⁴⁾ | 1.5 |
| Food waste disposal ⁷⁾ | 40 min | 75 ⁸⁾ | 3.0 ³⁾ | 13.5 min | No Limit ⁴⁾ | 1.5 |
| Sanitary towel disposal unit | 40 min | 75 ⁸⁾ | 3.0 ³⁾ | 5.4 min | No Limit ⁴⁾ | 1.5 |
| Floor drain | 50 | 50 | No Limit ³⁾ | 1.8 min | No Limit | 1.5 |
| Floor drain | 50 | 50 | No Limit ³⁾ | 1.8 min | No Limit | 1.5 |
| Floor drain | 100 | 50 | No Limit ³⁾ | 1.8 min | No Limit | 1.5 |
| 4 basins | 50 | 75 | 4.0 | 1.8 to 4.4 | 0 | 0 |
| Bowl urinals ³⁾ | 50 | 75 | No Limit ³⁾ | 1.8 to 1.9 | No Limit ⁴⁾ | 1.5 |
| Maximum of 8 WC's ⁶⁾ | 100 | 50 | 15.0 | 0.9 to 9.0 | 2 | 1.5 |
| Up to 5 spray tap basins ⁹⁾ | 30 max | 50 | 4.5 ³⁾ | 1.8 to 4.4 | No Limit ⁴⁾ | 0 |

1) Steeper gradient permitted if pipe is less than maximum permitted length.

2) If length is greater than 3m noisy discharge may result with an increased risk of blockage.

3) Should be as short as possible to limit problems with deposition.

4) Sharp throated bends should be avoided.

5) For slab urinal for up to 7 persons. Longer slabs to have more than one outlet.

6) Swept-entry branches serving WC's.

7) Includes small potato-peeling machines.

8) Tubular not bottle or resealing traps.

9) Spray tap basins shall have flush-grated wastes without plugs.

Ventilated discharge branches: Sizes and limitations upon the use of ventilated discharge branches are given in the tables above.

Limitations given in the second table are simplifications, for further information see national and local regulations and practice.

| Appliance | Dia. DN | Min. trap seal depth mm | Max. length (L) of pipe from trap outlet to stack m | Pipe gradient | Max. no. of bends | Max. drop (H) m |
|--|---------|-------------------------|---|---------------|------------------------|-----------------|
| Limitations for unventilated branch discharge pipes, system III | | | | | | |
| Washbasin, bidet (30mm diameter trap) | 30 | 75 | 3.0 | 1.8 min | 2 | 3.0 |
| Washbasin, bidet (30mm diameter trap) | 40 | 75 | 3.0 | 1.8 min | No Limit | 0 |
| Shower, bath | 40 | 50 | No Limit ²⁾ | 1.8 min | No Limit | No Limit |
| Bowl urinal | 40 | 75 | 3.0 ³⁾ | 1.8 min | No Limit ⁴⁾ | 3.0 |
| Trough urinal | 50 | 75 | 3.0 ³⁾ | 1.8 min | No Limit ⁴⁾ | 3.0 |
| Slab urinal ³⁾ | 60 | 50 | 3.0 ³⁾ | 1.8 min | No Limit ⁴⁾ | 3.0 |
| Kitchen sink (40mm diameter trap) | 40 | 75 | No Limit ²⁾ | 1.8 min | No Limit | No Limit |
| Household dishwasher or washing machine | 40 | 75 | No Limit ³⁾ | 1.8 min | No Limit | No Limit |
| WC with outlet up to 80mm ⁶⁾ & 14) | 75 | 50 | No Limit | 1.8 min | No Limit ⁴⁾ | 1.5 |
| WC with outlet greater than 80mm ⁶⁾ & 14) | 100 | 50 | No Limit | 1.8 min | No Limit ⁴⁾ | 1.5 |
| Food waste disposal ⁷⁾ | 40 min | 75 ⁸⁾ | 3.0 ³⁾ | 13.5 min | No Limit ⁴⁾ | 3.0 |
| Sanitary towel disposal unit | 40 min | 75 ⁸⁾ | 3.0 ³⁾ | 5.4 min | No Limit ⁴⁾ | 3.0 |
| Bath drain, floor drain | 50 | 50 | No Limit ³⁾ | 1.8 min | No Limit | No Limit |
| Floor drain | 70 | 50 | No Limit ³⁾ | 1.8 min | No Limit | No Limit |
| Floor drain | 100 | 50 | No Limit ³⁾ | 1.8 min | No Limit | No Limit |
| 5 basins ⁹⁾ | 50 | 75 | 7.0 | 1.8 to 4.4 | 2) | 0 |
| 10 basins ⁹⁾ & 10) | 50 | 75 | 10.0 | 1.8 to 1.9 | No Limit | 0 |
| Bowl urinals ⁹⁾ & 11) | 50 | 70 | No Limit ³⁾ | 1.8 min | No Limit ⁴⁾ | No Limit |
| More than 8 WC's ⁶⁾ | 100 | 50 | No Limit | 0.9 min | No Limit | No Limit |
| Up to 5 spray tap basins ⁹⁾ | 30 max | 50 | No Limit ³⁾ | 1.8 to 4.4 | No Limit ⁴⁾ | 0 |

1) For maximum distances from trap to vent (see Figure 8 of BS EN 1205-2:2000).

2) If length is greater than 3m noisy discharge may result with an increased risk of blockage.

3) Should be as short as possible to limit problems with deposition.

4) Sharp throated bends should be avoided.

5) For slab urinal for up to 7 persons. Longer slabs to have more than one outlet.

6) Swept-entry branches serving WC's.

7) Includes small potato-peeling machines.

8) Tubular not bottle or resealing traps.

9) See Figure 9 of BS EN 12056-2:2000).

10) Every basin shall be individually ventilated.

11) Any number.

12) Spray tap basins shall have flush-grated wastes without plugs.

13) The size of ventilating pipes to branches from appliances can be DN 25 but, if they are longer than 15m or contain more than five bends, a DN 30 pipe shall be used.

14) If the connection of the ventilating pipe is liable to blockage due to repeated splashing or submergence, it should be DN 50, up to 50mm above the spill-over of the appliance.

Design Data - Rainwater

Basic Principles for Rainwater Designs

Sizing of rainwater installations

The following general guidelines are based on BS EN 12056-3:2000 *Gravity Drainage Systems Inside Buildings – Roof Drainage, Layout and Calculations*.

There are two factors to consider when calculating the rainwater flow from a roof, firstly the design rainfall intensity to be used and the effective roof area to be drained.

Rainfall Intensity

It is important to confirm the design rainfall intensity with the client before carrying out any design work; this can be done by calculation (refer to BS EN 12056-3:2000) or based on local requirements.

Effective Roof Area

Before the effective roof area can be calculated it is necessary to determine if the calculation will be affected by:

- a) Snow, (Section NB4, BS EN 12056-3:2000) details the design requirements for snow which should be taken into account.
- b) Wind, there is no requirement to allow for the effect of wind when designing a rainwater system for flat roofs or roofs protected from the wind by adjacent buildings. However, the wind and the roof slope can have the effect of increasing the flow of rainwater from the roof of unprotected pitched roofs.

Note: Flat roofs should be designed to allow for structural deflection under dead and imposed loads, BS 6229:2003, table 6 details the minimum finished falls for a flat roof dependent upon the roof covering.

- c) Tall Buildings, when draining onto a lower level roof the effective catchment area of a wall should be taken as 50% of its area up to a maximum exposed height of 10m

The effective roof area can be calculated using the following formulae,

Flat roof

$$A(m^2) = L \times B$$

where:

A = Effective roof area (square metres)

L = Length of roof (metres)

B = Width of roof (metres)

Pitched roof

$$A(m^2) = L \times (B + H/2)$$

where:

A = Effective roof area (square metres)

L = Length of roof (metres)

B = Width of roof (metres)

H = Height of roof between eaves and ridge (metres)

If an adjacent wall is to be incorporated into the equation then the following needs to be added to the two formulae

$$0.5 (l \times w)$$

where:

L is up to maximum of 10m

Calculating design flow

Having determined the rainfall intensity (mm/hr) and effective roof area, A(m²), the following calculation is required to establish the actual design flow from the roof.


$$\text{Flow rate, } Q (l/s) = \frac{A(m^2) \times RI (mm/hr)}{3600}$$

Example

A 20 storey residential block has a roof plan of 40m x 25m, there is also a podium level at level 3 with plan dimensions of 40m x 25m. The podium has been designed as a flat roof with a parapet around the perimeter. The roof will have a minimum slope towards the parapet, rainwater will discharge into a 50mm formed gutter

Local regulations have determined a design rainfall intensity of 75mm/hr.

Terrain domed PVCu outlets are to be installed on the main roof and flat grated outlets are to be installed at podium level. All outlets are to discharge into PVCu rainwater pipes.

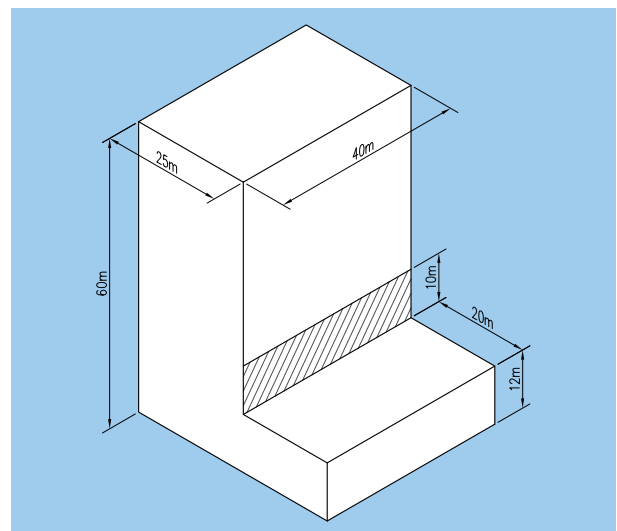

Basic Principles for Rainwater Designs

Step 1, Determine roof area to be drained and flow rate.

Main Roof

| | |
|---------------------|---|
| Effective roof area | $A(m^2) = (L \times B)$ $A = (40 \times 25)$ $A = 1000 m^2$ |
| Flow rate | $Q (l/s) = \frac{A(m^2) \times RI (mm/hr)}{3600}$ $Q = \frac{1000 \times 75}{3600}$ $Q = 20.83 l/s$ |

Podium Roof

| | |
|---------------------|--|
| Effective roof area | $A(m^2) = (L \times B) + 0.5 (l \times w)$ $A = (40 \times 20) + 0.5 (10 \times 40)$ $A = (800) + (200)$ $A = 1000 m^2$ |
| Flow rate | $Q (l/s) = \frac{A(m^2) \times RI (mm/hr)}{3600}$ $Q = \frac{1000 \times 75}{3600}$ $Q = 20.83 l/s$ |

Step 2, Determine No of rainwater outlets required.

The table below details the flow rates achieved through terrain rainwater outlets for a given head of water over the outlet during a 75mm/hr rainfall intensity.

| Roof Outlet | Size (mm) | Flow capacity litres/sec Head of water at Outlet | | |
|-------------|-----------|--|-------|-------|
| Part No. | | 30mm | 50mm | 100mm |
| 2180.2 | 50 | 0.88 | 1.18 | 1.78 |
| 2180.3 | 82 | 2.12 | 2.52 | 3.21 |
| 2181.2 | 50 | 2.00 | 2.27 | 2.69 |
| 2181.3 | 82 | 2.1 | 4.89 | 7.22 |
| 2170.3 | 82 | 9.18 | 11.08 | 13.67 |
| 2170.4 | 110 | 9.29 | 14.11 | 18.22 |
| 2171.3 | 82 | 4.94 | 9.24 | 16.64 |
| 2171.4 | 110 | 5.17 | 9.95 | 24.18 |

To suit the design of the main roof 5 No 2171.3 outlets will be installed based on a flow rate of 4.94 l/s, (head over outlet 30mm). This allows for a total of 24.7 l/s to be collected and discharged from the roof.

To suit the design of the podium roof 4 No 2170.3 outlets will be installed based on a flow rate of 9.18 l/s, (head over outlet 30mm). This allows for a total of 36.72 l/s to be collected and discharged from the roof.

Step 3, Determine size of rainwater pipes required.

BS EN 12056-3:2000, Table 8 – capacities of vertical rainwater pipes, recommends the maximum design flow in vertical circular rainwater pipes.

| Internal diameter of rainwater pipe (mm) | Capacity RWP (l/s) | | Internal diameter of rainwater pipe (mm) | Capacity RWP (l/s) | |
|--|-----------------------|-----------------------|--|-------------------------|-----------------------|
| | Filling Degree f=0.20 | Filling Degree f=0.33 | | Filling Degree f=0.20 | Filling Degree f=0.33 |
| 55 | 0.9 | 2.2 | 150 | 13.7 | 31.6 |
| 60 | 1.2 | 2.7 | 160 | 16.3 | 37.5 |
| 65 | 1.5 | 3.4 | 170 | 19.1 | 44.1 |
| 70 | 1.8 | 4.1 | 180 | 22.3 | 51.4 |
| 75 | 2.2 | 5 | 190 | 25.7 | 59.3 |
| 80 | 2.6 | 5.9 | 200 | 29.5 | 68 |
| 85 | 3.0 | 6.9 | 220 | 38.1 | 87.7 |
| 90 | 3.5 | 8.1 | 240 | 48 | 110.6 |
| 95 | 4.0 | 9.3 | 260 | 59.4 | 137 |
| 100 | 4.6 | 10.7 | 280 | 72.4 | 166.9 |
| 110 | 6.0 | 13.8 | 300 | 87.1 | 200.6 |
| 120 | 7.6 | 17.4 | > 300 | Use wyly-Eaton equation | |
| 130 | 9.4 | 21.6 | | Use wyly-Eaton equation | |

A filling degree of 0.33 shall be used unless national/local regulations and practice states that another filling factor should be used.

From our example, for the main roof we have chosen two number 110mm rainwater pipes collecting each collecting two rainwater outlets discharging a maximum of 4.94l/s. From The table above a 100mm internal rainwater pipe would be required (capacity 10.7l/s). Terrain 110mm PVCu pipework has an internal diameter of 103.6mm and is acceptable.

The podium roof will be collected and discharged through four number 110mm rainwater pipes each discharging a maximum of 9.18 l/s.

Note: where horizontal pipe runs are required, BS EN 12056-3:2000, table C.1 should be referred to, to ensure that the correct pipe size is chosen for the proposed gradient.

Fabrication Service

Fabrication Service

Pre-fabrication

Shortage of skilled labour is just one reason for the growth of pre-fabrication within construction. Moving significant elements of the process from site to factory provides improvements in quality, cost and time predictability, productivity and safety.

With unrivalled expertise in PVC fabrication systems, our Fabrication Service has been helping specifiers and contractors overcome problems, both at the design stage and on site.

Specialists in fabrication

The Terrain Fabrication team works closely with our Technical Services Department, employing the latest design and manufacturing technologies.

Together, they produce high quality Pre-fabricated Stacks and Specials, either by making modifications to existing products from the Terrain range, or by conceiving components from scratch to deal with particularly awkward problems.

Where fittings are designed specially, CAD technology is used to provide accurate drawings, along with indications of all relevant dimensions.

Our fabrication team provides services in two key areas.

Standard specials

- These are produced by making slight modifications to existing Terrain products to suit frequently occurring design problems.
- These products tend to be required regularly, but in small quantities.
- Delivery lead time is usually the same as for standard catalogue items.

Custom specials

- These are designed and fabricated specifically to meet the unique design requirements created by special architectural features. They can be made not only on a one-off or small batch basis, but also in their hundreds, subject to the demands of your particular project.
- They can be produced to your precise specification in virtually any size or shape.
- Custom Specials provide solutions to otherwise unsolvable design problems.
- Delivery time depends upon the complexity of the design and number required.

Pre fabricated stacks

Prefab Stacks consist of soil and waste pipes and fittings pre-assembled at the factory to pre-determined lengths to provide a modular soil and vent stack.

These offer a number of benefits:

- Time and labour costs on site are reduced by minimising the joints to be made.
- Highly efficient for commercial, leisure and housing projects where identical plumbing arrangements are repeated a number of times.
- Can be quickly installed, reducing the need to re-locate residents, making them ideal for refurbishment work.

Three easy steps for our special fabrication service

It couldn't be simpler to order Specials or have a Pre-fabricated Stack manufactured for you.

- Send a dimensioned sketch and specification by email, fax or post to our Technical Services Department.
- We will then advise you on design possibilities and send you back CAD diagrams, if necessary, complete with a part number and price for your approval.

If the special is being incorporated into the design stage of a drainage layout, be sure to include the unique part number with any plans to be passed to the contractor.

- You place the order through your local merchant, stating the unique product number and price.

Whether at the design stage or on site, should you come up against a problem related to plumbing and drainage, look no further than the Terrain Special Fabrication Service.



Certifications

Certifications

Certifications



Manufacturing Standards



BS 5255:1989 Specification for Thermoplastics Waste Pipe and Fittings

BS 4514:2001 PVC Soil and Ventilation Pipes, Fittings and Accessories

BS EN 1329:2000 Plastic Piping Systems for Soil and Waste Discharge

BS EN 1566:2000 Plastic Piping Systems for Soil and Waste Discharge (Chlorinated)

BS EN 12380 A1 Air Admittance Valve

BS EN 12380 A1 Air Admittance Valve (Pleura System)

BS EN 1366-3 Terrain Firetrap Sleeves and Collars

Quality Management Systems Standards

EN ISO 9001:2008 Management System

EN ISO14001:2004 Management System

BS OHSAS 18001:2007 Management System

PASS 99:2006 Integrated Management Registration

Index

| Code | Product Description | Page No. |
|-------------|-------------------------------------|----------|
| 100.3.30 | SOIL PIPE - PLAIN ENDED | 5 |
| 100.3.40 | SOIL PIPE - PLAIN ENDED | 5 |
| 100.4.30 | SOIL PIPE - PLAIN ENDED | 5 |
| 100.4.40 | SOIL PIPE - PLAIN ENDED | 5 |
| 100.6.30 | SOIL PIPE - PLAIN ENDED | 5 |
| 100.6.40 | SOIL PIPE - PLAIN ENDED | 5 |
| 100.8.40 | SOIL PIPE | 20 |
| 100.10.40 | SOIL PIPE | 20 |
| 100P.3.30 | SOIL PIPE | 23 |
| 100P.3.40 | SOIL PIPE | 23 |
| 100P.4.30 | SOIL PIPE | 23 |
| 100P.4.40 | SOIL PIPE | 23 |
| 100P.6.30 | SOIL PIPE | 23 |
| 100P.6.40 | SOIL PIPE | 23 |
| 101.3.92 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.4.92 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.6.92 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.4.104 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.4.112 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.3.135 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.4.135 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.6.135 | SWEPT BEND DOUBLE SOCKET | 5 |
| 101.4.025 | VARIABLE BEND SPIGOT/SOCKET | 6 |
| 101P.3.92 | SWEPT BEND SPIGOT/SOCKET | 23 |
| 101P.4.92 | SWEPT BEND SPIGOT/SOCKET | 23 |
| 101P.6.92 | SWEPT BEND SPIGOT/SOCKET | 23 |
| 101P.4.112 | SWEPT BEND SPIGOT/SOCKET | 23 |
| 101P.4T.112 | OFFSET BEND | 24 |
| 101P.4B.112 | OFFSET BEND | 24 |
| 103.4.92 | ACCESS BEND DOUBLE SOCKET | 9 |
| 103P.4.92 | ACCESS BEND SINGLE SOCKET | 25 |
| 104.3.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.3.135 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.4.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.4.924 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.6.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.3.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.4.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.4.924 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.6.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 6 |
| 104.4.104 | SINGLE EQUAL BRANCH | 6 |
| 104.4.135 | SINGLE EQUAL BRANCH | 6 |
| 104.6.135 | SINGLE EQUAL BRANCH | 6 |
| 104.104.92 | SINGLE BRANCH SPIGOT OUTLET | 7 |
| 104.412.92 | SINGLE EQUAL BRANCH VARIABLE BOSS | 7 |
| 104.422.92 | SINGLE EQUAL BRANCH VARIABLE BOSS | 7 |
| 104.64.92 | SINGLE UNEQUAL BRANCH TRIPLE SOCKET | 7 |
| 104.64.135 | SINGLE UNEQUAL BRANCH TRIPLE SOCKET | 7 |
| 104.10.135 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 20 |
| 104.10.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 20 |
| 104.86.135 | SINGLE UNEQUAL BRANCH TRIPLE SOCKET | 21 |
| 104.106.135 | SINGLE UNEQUAL BRANCH TRIPLE SOCKET | 21 |

| Code | Product Description | Page No. |
|--------------|---|----------|
| 104.106.92 | SINGLE UNEQUAL BRANCH TRIPLE SOCKET | 21 |
| 104P.8.135 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 20 |
| 104P.8.92 | SINGLE EQUAL BRANCH TRIPLE SOCKET | 20 |
| 104P.84.135 | SINGLE UNEQUAL BRANCH TRIPLE SOCKET | 21 |
| 104P.3.92 | SINGLE BRANCH SPIGOT OUTLET | 24 |
| 104P.4.92 | SINGLE BRANCH SPIGOT OUTLET | 24 |
| 104P.6.92 | SINGLE BRANCH SPIGOT OUTLET | 24 |
| 104P.4.112 | SINGLE BRANCH SPIGOT OUTLET | 24 |
| 104P.4.135 | SINGLE EQUAL BRANCH PLAIN | 24 |
| 105.4.92 | SINGLE ACCESS BRANCH TRIPLE SOCKET | 9 |
| 105P.4.92 | ACCESS BEND SINGLE EQUAL BRANCH SINGLE OUTLET | 25 |
| 106.490.92 | CORNER BRANCH TRIPLE SOCKET | 7 |
| 106.690.92 | CORNER BRANCH TRIPLE SOCKET | 7 |
| 106.490.12 | CORNER BOSS BRANCH | 8 |
| 106.490.22 | CORNER BOSS BRANCH | 8 |
| 106.104.92 | DOUBLE BRANCH | 8 |
| 106.4.92 | DOUBLE BRANCH | 8 |
| 106.4.134 | DOUBLE BRANCH | 8 |
| 106.6.135 | DOUBLE BRANCH | 8 |
| 106.64.92 | DOUBLE UNEQUAL BRANCH | 8 |
| 106.10.135 | DOUBLE BRANCH | 21 |
| 106.10.92 | DOUBLE BRANCH | 21 |
| 106P.8.135 | DOUBLE BRANCH | 21 |
| 106P.8.92 | DOUBLE BRANCH | 21 |
| 106P.106.135 | DOUBLE BRANCH | 21 |
| 106P.106.92 | DOUBLE BRANCH | 21 |
| 106P.4.92 | DOUBLE EQUAL BRANCH SPIGOT OUTLET | 24 |
| 107.3.92 | SPIGOT SOCKET BENDS | 6 |
| 107.4.92 | SPIGOT SOCKET BENDS | 6 |
| 107.4.135 | SPIGOT SOCKET BENDS | 6 |
| 107.4.025 | VARIABLE BEND SPIGOT/SOCKET | 6 |
| 107P.6.135 | SPIGOT SOCKET BENDS | 6 |
| 107P.8.135 | SPIGOT SOCKET BEND | 20 |
| 107P.8.92 | SPIGOT SOCKET BEND | 20 |
| 107P.10.135 | SPIGOT SOCKET BEND | 20 |
| 107P.10.92 | SPIGOT SOCKET BEND | 20 |
| 107P.3.135 | SWEPT BEND SPIGOT/SOCKET | 23 |
| 107P.4.135 | SWEPT BEND SPIGOT/SOCKET | 23 |
| 107P.6.135 | SWEPT BEND SPIGOT/SOCKET | 23 |
| 107P.4.92 | TIGHT RADIUS BEND SPIGOT/SOCKET | 23 |
| 109.3 | RING SEAL ADAPTOR | 5 |
| 109.4 | RING SEAL ADAPTOR | 5 |
| 109.6 | RING SEAL ADAPTOR | 5 |
| 110.3 | STRAIGHT COUPLER DOUBLE SOCKET | 5 |
| 110.4 | STRAIGHT COUPLER DOUBLE SOCKET | 5 |
| 110.6 | STRAIGHT COUPLER DOUBLE SOCKET | 5 |
| 110P.8 | STRAIGHT COUPLER | 20 |
| 110P.10 | STRAIGHT COUPLER | 20 |
| 110P.3 | STRAIGHT COUPLER DOUBLE SOCKET | 23 |
| 110P.4 | STRAIGHT COUPLER DOUBLE SOCKET | 23 |
| 110P.6 | STRAIGHT COUPLER DOUBLE SOCKET | 23 |
| 111.3 | EXPANSION COUPLER | 5 |

| Code | Product Description | Page No. |
|------------|---|----------|
| 111.4 | EXPANSION COUPLER | 5 |
| 111.6 | EXPANSION COUPLER | 5 |
| 111.S.3 | SLIP COUPLER DOUBLE SOCKET | 5 |
| 111.S.4 | SLIP COUPLER DOUBLE SOCKET | 5 |
| 111.S.6 | SLIP COUPLER DOUBLE SOCKET | 5 |
| 111.S.3 | SLIP COUPLER DOUBLE SOCKET | 23 |
| 111.S.4 | SLIP COUPLER DOUBLE SOCKET | 23 |
| 111.S.6 | SLIP COUPLER DOUBLE SOCKET | 23 |
| 111P.3 | PIPE END SOCKET/SPIGOT | 23 |
| 111P.4 | PIPE END SOCKET/SPIGOT | 23 |
| 111SP.8 | SLIP COUPLER | 20 |
| 112.4.125 | TWO PART WASTE BOSS SOLVENT SOCKET | 10 |
| 112.3.15 | TWO PART WASTE BOSS SOLVENT SOCKET | 10 |
| 112.4.15 | TWO PART WASTE BOSS SOLVENT SOCKET | 10 |
| 112.4.2 | TWO PART WASTE BOSS SOLVENT SOCKET | 10 |
| 112.6.2 | TWO PART WASTE BOSS SOLVENT SOCKET | 10 |
| 112P.4.125 | STRAP-ON BOSS | 26 |
| 112P.4.15 | STRAP-ON BOSS | 26 |
| 112P.4.2 | STRAP-ON BOSS | 26 |
| 115P.4 | ADAPTOR SADDLES | 15 |
| 115P.4 | ADAPTOR SADDLES | 26 |
| 117.125 | STRAIGHT BOSS ADAPTOR RING SEAL SOCKET | 15 |
| 117.15 | STRAIGHT BOSS ADAPTOR RING SEAL SOCKET | 15 |
| 117.2 | STRAIGHT BOSS ADAPTOR RING SEAL SOCKET | 15 |
| 117.15.90 | BOSS ADAPTOR BEND SOLVENT SOCKET | 15 |
| 117.2.90 | BOSS ADAPTOR BEND SOLVENT SOCKET | 15 |
| 117.2.150 | BOSS ADAPTOR BEND SOLVENT SOCKET | 15 |
| 117.125 | BOSS ADAPTORS STRAIGHT | 26 |
| 117.15 | BOSS ADAPTORS STRAIGHT | 26 |
| 117.2 | BOSS ADAPTORS STRAIGHT | 26 |
| 119.412.15 | UNIVERSAL SOIL MANIFOLD | 11 |
| 119P.4.15 | UNIVERSAL SOIL MANIFOLD | 27 |
| 120.4.125 | SINGLE BOSSED PIPE CONNECTOR DOUBLE SOCKET | 10 |
| 120.4.15 | SINGLE BOSSED PIPE CONNECTOR DOUBLE SOCKET | 10 |
| 120.412.15 | SINGLE BOSSED PIPE CONNECTOR SPIGOT | 10 |
| 120.3.2 | DOUBLE BOSSED PIPE CONNECTOR DOUBLE SOCKET | 11 |
| 120.4.2 | FOUR-WAY BOSS PIPE DOUBLE SOLVENT SOCKET | 11 |
| 120.412.2 | FOUR-WAY BOSS PIPE DOUBLE SOLVENT SOCKET/SPIGOT | 11 |
| 120P.412.2 | FOUR-WAY BOSS PIPE PUSH-FIT SOCKET/SPIGOT | 26 |
| 120P.4.15 | TRIPLE BOSS COLLAR | 27 |
| 121.4.15 | TRIPLE BOSSED PIPE CONNECTOR DOUBLE SOCKET | 11 |
| 122.4.125 | SELF LOCKING BOSS SEAL RING SOCKET | 10 |
| 122.4.15 | SELF LOCKING BOSS SEAL RING SOCKET | 10 |
| 122.4.2 | SELF LOCKING BOSS SEAL RING SOCKET | 10 |
| 123.4 | SINGLE BOSSED PIPE CONNECTOR DOUBLE SOCKET | 10 |
| 123P.8.4 | REDUCER (ECCENTRIC / CONCENTRIC) | 21 |
| 123P.8.6 | REDUCER (ECCENTRIC / CONCENTRIC) | 21 |
| 123P.3 | SHORT BOSSED PIPE | 26 |
| 123P.4 | SHORT BOSSED PIPE | 26 |
| 124.3.2 | SOCKET REDUCER | 11 |
| 124.4.2 | SOCKET REDUCER | 11 |
| 124.4.3 | SOCKET REDUCER | 11 |

| Code | Product Description | Page No. |
|-----------|--|----------|
| 124.6.4 | SOCKET REDUCER | 11 |
| 124.8.4C | REDUCER (ECCENTRIC / CONCENTRIC) | 21 |
| 124.8.6C | REDUCER (ECCENTRIC / CONCENTRIC) | 21 |
| 124.10.8C | REDUCER (ECCENTRIC / CONCENTRIC) | 21 |
| 124P.3.2 | LEVEL INVERT TAPER | 26 |
| 124P.4.2 | LEVEL INVERT TAPER | 26 |
| 124P.4.3 | LEVEL INVERT TAPER | 26 |
| 124P.6.4 | LEVEL INVERT TAPER | 26 |
| 126.3.12 | POST FORMED SOCKET | 15 |
| 126.4.12 | POST FORMED SOCKET | 15 |
| 130.4 | SOCKET PLUG | 10 |
| 130.6 | SOCKET PLUG | 10 |
| 130.4 | SOCKET PLUG | 27 |
| 130.6 | SOCKET PLUG | 27 |
| 131.3 | WEATHERING APRON | 14 |
| 131.4 | WEATHERING APRON | 14 |
| 131.6 | WEATHERING APRON | 14 |
| 131.3.200 | WEATHERING APRON | 14 |
| 131.4.200 | WEATHERING APRON | 14 |
| 132.4 | PVC-U CAULKING BUSH | 15 |
| 135.3 | ACCESS DOOR | 9 |
| 135.4 | ACCESS DOOR | 9 |
| 135.6 | ACCESS DOOR | 9 |
| 136.3 | ACCESS CAP | 9 |
| 136.4 | ACCESS CAP | 9 |
| 136.6 | ACCESS CAP | 9 |
| 136P.3 | ACCESS PIPE AND COVER SINGLE SOCKET | 25 |
| 136P.4 | ACCESS PIPE AND COVER SINGLE SOCKET | 25 |
| 136P.6 | ACCESS PIPE AND COVER SINGLE SOCKET | 25 |
| 137.3 | ACCESS PIPE CONNECTOR | 9 |
| 137.4 | ACCESS PIPE CONNECTOR | 9 |
| 138.4 | ACCESS PIPE DOUBLE SOCKET | 8 |
| 138.6 | ACCESS PIPE DOUBLE SOCKET | 8 |
| 139.4 | ACCESS PIPE SINGLE SOCKET | 8 |
| 139.8G | ACCESS PIPE AND COVER | 21 |
| 139.10G | ACCESS PIPE AND COVER | 21 |
| 139P.3 | ACCESS PIPE AND COVER SINGLE SOCKET | 25 |
| 139P.4 | ACCESS PIPE AND COVER SINGLE SOCKET | 25 |
| 139P.6 | ACCESS PIPE AND COVER SINGLE SOCKET | 25 |
| 140.3 | TWO-PIECE PIPE BRACKET | 13 |
| 140.4 | TWO-PIECE PIPE BRACKET | 13 |
| 140.6 | TWO-PIECE PIPE BRACKET | 13 |
| 142.4 | PIPE BRACKET GALVANISED DRIVE-IN | 13 |
| 143.3 | ONE-PIECE PIPE BRACKET | 13 |
| 143.4 | ONE-PIECE PIPE BRACKET | 13 |
| 144.4 | ADJUSTABLE PIPE BRACKET PLASTIC-COATED | 13 |
| 149.16.00 | WEATHERING SLATES | 14 |
| 149.18.22 | WEATHERING SLATES | 14 |
| 149.24.22 | WEATHERING SLATES | 14 |
| 150.3 | VENT COWL | 14 |
| 150.4 | VENT COWL | 14 |
| 150.6 | VENT COWL | 14 |

Index

| Code | Product Description | Page No. |
|-------------|--------------------------------|----------|
| 152.6 | VENT COWL | 14 |
| 152.4 | DUCT COWL | 14 |
| 152.6 | DUCT COWL | 14 |
| 153.3.4 | AUTOMATIC AIR ADMITTANCE VALVE | 14 |
| 153.3.41 | AUTOMATIC AIR ADMITTANCE VALVE | 14 |
| 1725.2 | INTUMESCENT PIPE COLLAR | 50 |
| 1725.3 | INTUMESCENT PIPE COLLAR | 50 |
| 1725.4 | INTUMESCENT PIPE COLLAR | 50 |
| 1725.6 | INTUMESCENT PIPE COLLAR | 50 |
| 1726 | FIXING BOLTS | 50 |
| 190.3 | THERMAL MOVEMENT LIMITER | 13 |
| 190.4 | THERMAL MOVEMENT LIMITER | 13 |
| 190.6 | THERMAL MOVEMENT LIMITER | 13 |
| 191.3 | INTERMEDIATE SUPPORT BRACKET | 13 |
| 191.4 | INTERMEDIATE SUPPORT BRACKET | 13 |
| 191.6 | INTERMEDIATE SUPPORT BRACKET | 13 |
| 200.125.30 | WASTE PIPE | 29 |
| 200.125.40 | WASTE PIPE | 29 |
| 200.15.30 | WASTE PIPE | 29 |
| 200.15.40 | WASTE PIPE | 29 |
| 200.2.30 | WASTE PIPE | 29 |
| 200.2.40 | WASTE PIPE | 29 |
| 201.125.91 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.15.91 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.2.91 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.125.135 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.15.135 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.2.135 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.125.165 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.15.165 | SWEPT BEND DOUBLE SOCKET | 30 |
| 201.2.165 | SWEPT BEND DOUBLE SOCKET | 30 |
| 202.125.91 | KNUCKLE BEND DOUBLE SOCKET | 30 |
| 202.15.91 | KNUCKLE BEND DOUBLE SOCKET | 30 |
| 204.125.91 | SWEPT TEE ALL SOCKET | 30 |
| 204.15.91 | SWEPT TEE ALL SOCKET | 30 |
| 204.2.91 | SWEPT TEE ALL SOCKET | 30 |
| 204.125.135 | SWEPT TEE ALL SOCKET | 30 |
| 204.15.135 | SWEPT TEE ALL SOCKET | 30 |
| 204.2.135 | SWEPT TEE ALL SOCKET | 30 |
| 206.15.91 | SWEPT CROSS ALL SOCKET | 30 |
| 206.2.91 | SWEPT CROSS ALL SOCKET | 30 |
| 206.2.135 | SWEPT CROSS ALL SOCKET | 30 |
| 207.125.92 | SPIGOT/SOCKET BENDS | 30 |
| 207.15.92 | SPIGOT/SOCKET BENDS | 30 |
| 207.2.92 | SPIGOT/SOCKET BENDS | 30 |
| 207.125.135 | SPIGOT/SOCKET BENDS | 30 |
| 207.15.135 | SPIGOT/SOCKET BENDS | 30 |
| 207.2.135 | SPIGOT/SOCKET BENDS | 30 |
| 207.125.150 | SPIGOT/SOCKET BENDS | 30 |
| 207.15.150 | SPIGOT/SOCKET BENDS | 30 |
| 209.2 | SEAL RING ADAPTOR | 29 |
| 210.125 | STRAIGHT COUPLER DOUBLE SOCKET | 29 |

| Code | Product Description | Page No. |
|------------|--|----------|
| 210.15 | STRAIGHT COUPLER DOUBLE SOCKET | 29 |
| 210.2 | STRAIGHT COUPLER DOUBLE SOCKET | 29 |
| 211.125 | UNION DOUBLE SOCKET | 29 |
| 211.15 | UNION DOUBLE SOCKET | 29 |
| 211.2 | UNION DOUBLE SOCKET | 29 |
| 212.125 | 200 WASTE TO MALE IRON | 33 |
| 212.15 | 200 WASTE TO MALE IRON | 33 |
| 212.2 | 200 WASTE TO MALE IRON | 33 |
| 213.125 | 200 WASTE TO FEMALE IRON | 33 |
| 213.15 | 200 WASTE TO FEMALE IRON | 33 |
| 213.2 | 200 WASTE TO FEMALE IRON | 33 |
| 216.125 | 200 WASTE TO MALE IRON | 33 |
| 216.15 | 200 WASTE TO MALE IRON | 33 |
| 216.2 | 200 WASTE TO MALE IRON | 33 |
| 217.125 | 200 WASTE TO FEMALE IRON | 33 |
| 217.15 | 200 WASTE TO FEMALE IRON | 33 |
| 217.2 | 200 WASTE TO FEMALE IRON | 33 |
| 2170.3 | FLAT ROOF OUTLET (LARGE) | 17 |
| 2170.4 | FLAT ROOF OUTLET (LARGE) | 17 |
| 2171.3 | DOMED ROOF OUTLET (LARGE) | 17 |
| 2171.4 | DOMED ROOF OUTLET (LARGE) | 17 |
| 2171.4A | INVERTED ROOF OUTLET | 17 |
| 2172.3 | BALCONY OUTLET | 18 |
| 2174.44 | INVERTED ROOF OUTLET | 17 |
| 2174.3 | BALCONY OUTLET | 18 |
| 218.125 | REVERSE NUT ADAPTOR | 33 |
| 218.15 | REVERSE NUT ADAPTOR | 33 |
| 2180.2 | FLAT ROOF OUTLET (SMALL DIAMETER) | 17 |
| 2180.3 | FLAT ROOF OUTLET (SMALL DIAMETER) | 17 |
| 2181.2 | DOMED ROOF OUTLET (SMALL DIAMETER) | 17 |
| 2181.3 | DOMED ROOF OUTLET (SMALL DIAMETER) | 17 |
| 223.15.125 | LEVEL INVERT TAPER | 31 |
| 223.2.125 | LEVEL INVERT TAPER | 31 |
| 223.2.15 | LEVEL INVERT TAPER | 31 |
| 224.15.125 | SOCKET REDUCER | 31 |
| 224.2.125 | SOCKET REDUCER | 31 |
| 224.2.15 | SOCKET REDUCER | 31 |
| 225.125 | EXPANSION COUPLER SEAL RING AND SOLVENT SOCKET | 29 |
| 225.15 | EXPANSION COUPLER SEAL RING AND SOLVENT SOCKET | 29 |
| 225.2 | EXPANSION COUPLER SEAL RING AND SOLVENT SOCKET | 29 |
| 226.2 | POST FORMED STOCKET | 32 |
| 227.125 | SPIGOT SOCKET COUPLER | 29 |
| 227.15 | SPIGOT SOCKET COUPLER | 29 |
| 227.2 | SPIGOT SOCKET COUPLER | 29 |
| 231.2 | WEATHERING APRON | 31 |
| 232 | CAULKING BUSH | 32 |
| 237.125 | ACCESS PLUG | 31 |
| 237.15 | ACCESS PLUG | 31 |
| 237.2 | ACCESS PLUG | 31 |
| 240.125 | PIPE FIXING CLIP | 31 |
| 240.15 | PIPE FIXING CLIP | 31 |
| 240.2 | PIPE FIXING CLIP | 31 |

| Code | Product Description | Page No. |
|-------------|--|----------|
| 242.125 | EXPANSION FITTING FIXING CLIP | 31 |
| 242.15 | EXPANSION FITTING FIXING CLIP | 31 |
| 242.2 | EXPANSION FITTING FIXING CLIP | 31 |
| 250.2 | VENT COWL | 32 |
| 253W | AUTOMATIC AIR ADMITTANCE VALVE | 32 |
| 279.432 | TRAPPED FLOOR GULLY | 12 |
| 279.432 | TRAPPED FLOOR GULLY | 27 |
| 281.43 | TRAPPED FLOOR GULLY | 12 |
| 281.64 | TRAPPED FLOOR GULLY | 12 |
| 281.43 | TRAPPED FLOOR GULLY | 27 |
| 281.64 | TRAPPED FLOOR GULLY | 27 |
| 282.6 | FLOOR GULLY INLETS | 12 |
| 282.6 | FLOOR GULLY INLETS | 27 |
| 283.6 | FLOOR GULLY INLETS | 12 |
| 283.6 | FLOOR GULLY INLETS | 27 |
| 284.6 | SEALED GULLY RAISING PIECE | 12 |
| 284.6 | SEALED GULLY RAISING PIECE | 27 |
| 285.6 | SEALED GULLY RAISING PIECE | 12 |
| 285.6 | SEALED GULLY RAISING PIECE | 27 |
| 300.125.30 | WASTE PIPE | 35 |
| 300.15.30 | WASTE PIPE | 35 |
| 300.2.30 | WASTE PIPE | 35 |
| 301.125.91 | SWEPT BEND DOUBLE SOCKET | 35 |
| 301.15.91 | SWEPT BEND DOUBLE SOCKET | 35 |
| 301.2.91 | SWEPT BEND DOUBLE SOCKET | 35 |
| 301.125.135 | SWEPT BEND DOUBLE SOCKET | 35 |
| 301.15.135 | SWEPT BEND DOUBLE SOCKET | 35 |
| 301.2.135 | SWEPT BEND DOUBLE SOCKET | 35 |
| 302.125.90 | KNUCKLE BEND 90° DOUBLE SOCKET | 35 |
| 302.15.90 | KNUCKLE BEND 90° DOUBLE SOCKET | 35 |
| 302.2.90 | KNUCKLE BEND 90° DOUBLE SOCKET | 35 |
| 304.125.91 | SWEPT TEE 91¼° | 35 |
| 304.15.91 | SWEPT TEE 91¼° | 35 |
| 304.2.91 | SWEPT TEE 91¼° | 35 |
| 307.125.90 | SWIVEL ELBOW BEND 90° SINGLE SOCKET/SPIGOT | 35 |
| 307.15.90 | SWIVEL ELBOW BEND 90° SINGLE SOCKET/SPIGOT | 35 |
| 310.125 | STRAIGHT COUPLER DOUBLE SOCKET | 35 |
| 310.15 | STRAIGHT COUPLER DOUBLE SOCKET | 35 |
| 310.2 | STRAIGHT COUPLER DOUBLE SOCKET | 35 |
| 311.125 | TANK CONNECTOR | 36 |
| 311.15 | TANK CONNECTOR | 36 |
| 311.2 | TANK CONNECTOR | 36 |
| 323.15.125 | LEVEL INVERT TAPER | 36 |
| 323.2.125 | LEVEL INVERT TAPER | 36 |
| 323.2.15 | LEVEL INVERT TAPER | 36 |
| 337.125 | ACCESS PLUG | 36 |
| 337.15 | ACCESS PLUG | 36 |
| 337.2 | ACCESS PLUG | 36 |
| 340.125 | PIPE AND FITTING CLIP | 36 |
| 340.15 | PIPE AND FITTING CLIP | 36 |
| 340.125 | PIPE AND FITTING CLIP | 36 |
| 407.125.90 | P TO S TRAP CONVERSION BEND | 40 |

| Code | Product Description | Page No. |
|------------|---|----------|
| 407.15.90 | P TO S TRAP CONVERSION BEND | 40 |
| 411.125 | BOTTLE TRAP | 39 |
| 411.15 | BOTTLE TRAP | 39 |
| 411AS.125 | BOTTLE TRAP ANTI-SYPHON | 39 |
| 411AS.15 | BOTTLE TRAP ANTI-SYPHON | 39 |
| 411T.125 | BOTTLE TRAP - ADJUSTABLE TELESCOPIC | 39 |
| 411T.15 | BOTTLE TRAP - ADJUSTABLE TELESCOPIC | 39 |
| 415.125 | RESEALING BOTTLE TRAP | 39 |
| 415.15 | RESEALING BOTTLE TRAP | 39 |
| 421.125 | RESEALING BOTTLE TRAP - ADJUSTABLE TELESCOPIC | 39 |
| 421.15 | RESEALING BOTTLE TRAP - ADJUSTABLE TELESCOPIC | 39 |
| 421AS.125 | BOTTLE TRAP ANTI-SYPHON - ADJUSTABLE TELESCOPIC | 39 |
| 421AS.15 | BOTTLE TRAP ANTI-SYPHON - ADJUSTABLE TELESCOPIC | 39 |
| 431.125 | TUBULAR SWIVEL P TRAP | 40 |
| 431.15 | TUBULAR SWIVEL P TRAP | 40 |
| 431AS.125 | TUBULAR SWIVEL P TRAP ANTI-SYPHON | 40 |
| 431AS.15 | TUBULAR SWIVEL P TRAP ANTI-SYPHON | 40 |
| 431T.125 | TUBULAR SWIVEL P TRAP - ADJUSTABLE TELESCOPIC | 40 |
| 431T.15 | TUBULAR SWIVEL P TRAP - ADJUSTABLE TELESCOPIC | 40 |
| 431TAS.125 | TUBULAR SWIVEL P TRAP ANTI-SYPHON - ADJUSTABLE TELESCOPIC | 40 |
| 431TAS.15 | TUBULAR SWIVEL P TRAP ANTI-SYPHON - ADJUSTABLE TELESCOPIC | 40 |
| 432.125 | TUBULAR SWIVEL S TRAP | 40 |
| 432.15 | TUBULAR SWIVEL S TRAP | 40 |
| 433.15 | WASHING MACHINE HALF TRAP | 41 |
| 433AS.15 | WASHING MACHINE HALF TRAP ANTI-SYPHON | 41 |
| 434.15 | WASHING MACHINE TRAP WITH UPSTAND | 41 |
| 434AS.15 | WASHING MACHINE TRAP ANTI-SYPHON WITH UPSTAND | 41 |
| 445.125 | RUNNING TRAP | 40 |
| 445.15 | RUNNING TRAP | 40 |
| 445AS.125 | RUNNING TRAP ANTI-SYPHON | 41 |
| 445AS.15 | RUNNING TRAP ANTI-SYPHON | 41 |
| 451.15 | LOW LEVEL BATH TRAP ANTI-SYPHON C/W OVERFLOW HOSE AND CP ROSE | 42 |
| 455.15 | BATH TRAP WITH CLEANING EYE | 41 |
| 456.15 | BATH TRAP C/W OVERFLOW HOSE AND CP ROSE | 42 |
| 457.15 | LOW LEVEL BATH TRAP | 42 |
| 459.15 | LOW LEVEL BATH TRAP C/W OVERFLOW HOSE AND CP ROSE | 42 |
| 482.15 | SHOWER TRAP | 42 |
| 483.15 | SHOWER TRAP | 42 |
| 484.15 | SHOWER TRAP WITH 45° ADJUSTABLE WASTE | 42 |
| 486.15 | SHOWER TRAP WITH 45° ADJUSTABLE WASTE | 42 |
| 491P.4.90 | LONG 90° WC CONNECTOR FIN SEAL | 44 |
| 492.4.5 | 90° WC TURNED CONNECTOR SOCKET OUTLET | 45 |
| 493P.00 | EXTENSION 200MM | 44 |
| 494P1.4.00 | 40MM OFFSET WC CONNECTOR FIN SEAL | 43 |
| 494P2.4.00 | 12MM OFFSET WC CONNECTOR FIN SEAL | 43 |
| 495.4.5 | WC STRAIGHT CONNECTOR SOCKET OUTLET | 45 |
| 495P.4.90 | 90° WC CONNECTOR WITH BOSS FIN SEAL | 44 |
| 496P.4.90 | SWAN NECK WC CONNECTOR 90° FIN SEAL | 43 |
| 497.35.05 | WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | 44 |

Index

| Code | Product Description | Page No. |
|------------|---|----------|
| 497.35.14 | WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | 44 |
| 497.35.24 | WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | 44 |
| 497.35.34 | WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | 44 |
| 498.4.025 | WC VARIABLE CONNECTOR VARIABLE BEND | 45 |
| 498.4.02 | WC CONNECTORS SOCKET OUTLET | 45 |
| 498.4.90 | WC CONNECTORS SOCKET OUTLET | 45 |
| 498P.4.030 | SWIVEL CONNECTOR 0-30° FIN SEAL | 43 |
| 499.4.05 | WC MANIFOLD CONNECTORS FIN SEAL SPIGOT | 44 |
| 499.4.14 | WC MANIFOLD CONNECTORS FIN SEAL SPIGOT | 44 |
| 499.4.24 | WC MANIFOLD CONNECTORS FIN SEAL SPIGOT | 44 |
| 499.4.34 | WC MANIFOLD CONNECTORS FIN SEAL SPIGOT | 44 |
| 499.4.90 | WC CONNECTOR 90° SPIGOT OUTLET | 45 |
| 499P.4.00 | STRAIGHT WC CONNECTOR FIN SEAL | 43 |
| 499P.4.90 | 90° WC CONNECTOR FIN SEAL BEND | 43 |
| 499P.4.104 | 14° WC CONNECTOR FIN SEAL SPIGOTS | 43 |
| 4DW200 | ADAPTOR TO UNDERGROUND DRAIN | 32 |
| 4DW3 | ADAPTOR TO UNDERGROUND DRAIN | 15 |
| 500.75.40 | OVERFLOW PIPE | 47 |
| 501.75.91 | BEND DOUBLE SOCKET | 47 |
| 501.75.135 | BEND DOUBLE SOCKET | 47 |
| 502.75.90 | BENT TANK CONNECTOR 90° | 48 |
| 504.75.91 | BRANCH | 47 |
| 510.125 | STRAIGHT COUPLER DOUBLE SOCKET | 47 |
| 511.75 | STRAIGHT TANK CONNECTOR | 48 |
| 512.75 | BSP ADAPTOR SOLVENT-WELD SOCKET AND ¾" BSP SOCKET | 48 |
| 519.75 | REVERSE NUT CONNECTOR | 48 |
| 524.75 | SOCKET REDUCER | 47 |
| 540.75 | PIPE FIXING CLIP (PLASTIC) | 47 |
| 590.75 | TUNDISH | 48 |
| 6592/DVW | ACCESS DOOR WITH TEST NIPPLE | 9 |
| 6592/DVW | ACCESS DOOR WITH TEST NIPPLE | 25 |
| 9100.125 | TERRAIN ACCESSORIES - LIQUID WELD | 50 |
| 9100.250 | TERRAIN ACCESSORIES - LIQUID WELD | 50 |
| 9100.500 | TERRAIN ACCESSORIES - LIQUID WELD | 50 |
| 9101.125 | TERRAIN ACCESSORIES - CLEANING FLUID | 50 |
| 9101.250 | TERRAIN ACCESSORIES - CLEANING FLUID | 50 |
| 9104.3 | PACKING PIECE | 50 |
| 9104.4 | PACKING PIECE | 50 |
| 9104.6 | PACKING PIECE | 50 |
| 9105.500 | HOLE MARKING TEMPLATE | 50 |
| 9113 | MANIFOLD SEALING INSERT | 49 |
| 9114 | MANIFOLD PLUG (SPARE) | 49 |
| 9115 | TOGGLE BOLT | 50 |
| 9116.4 | SPARE SEAL RINGS (SOIL) | 49 |
| 9116.6 | SPARE SEAL RINGS (SOIL) | 49 |
| 9119.B | SPARE SEAL RINGS (SOIL) | 49 |
| 9120 | SPARE SEAL RINGS (SOIL) | 49 |
| 9124 | WC PAN SEAL (SOIL) | 49 |
| 9132.125 | SPARE SEAL RING (WASTE) | 49 |
| 9132.15 | SPARE SEAL RING (WASTE) | 49 |

| Code | Product Description | Page No. |
|------------|---|----------|
| 9132.2 | SPARE SEAL RING (WASTE) | 49 |
| 9136.250 | TERRAIN ACCESSORIES - LUBRICANT | 50 |
| 9136.500 | TERRAIN ACCESSORIES - LUBRICANT | 50 |
| 9149 | SPARE SEAL RINGS (SOIL) | 49 |
| 9300.4 | TERRAIN P.A.P.A. | 51 |
| 9301.253 | TERRAIN PLEURA 50 | 51 |
| 9301.34 | TERRAIN PLEURA 100 | 51 |
| 9980 | SPARE GRID FOR DOMED ROOF OUTLET | 18 |
| 9981 | SPARE GRID FOR FLAT ROOF OUTLET | 18 |
| 9990 | SPARE GRID FOR BALCONY OUTLET | 18 |
| 9995.3 | CAP FOR BALCONY OUTLET | 18 |
| F497.35.09 | WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | 44 |
| F497.35.18 | WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | 44 |
| F497.35.29 | WC FRAME MANIFOLD BEND CONNECTORS FIN SEAL SPIGOT | 44 |
| | TWO WAY BALCONY OUTLET | 18 |
| | TWO WAY BALCONY OUTLET | 18 |

Notes

Terrain Above Ground



Polypipe Gulf FZ LLC

Dubai Media City
Loft Office No. 03
Office no. 404
P.O. Box 502320
Dubai
United Arab Emirates
Tel: +971 (0)4 454 8328
Fax: +971 (0)4 454 2949

Polypipe Terrain

New Hythe Business Park
College Road
Aylesford
Kent
ME20 7PJ
United Kingdom
Tel: +44 (0)1622 795200
Fax: +44 (0)1622 716796

international@polypipe.com commercialenquiries@polypipe.com
www.polypipegulf.com www.terraindrainage.com